

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 November 2007 (15.11.2007)

PCT

(10) International Publication Number
WO 2007/131195 A2

(51) International Patent Classification:
G02B 26/08 (2006.01)

(21) International Application Number:

PCT/US2007/068286

(22) International Filing Date: 4 May 2007 (04.05.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/798,415	5 May 2006 (05.05.2006)	US
60/799,316	9 May 2006 (09.05.2006)	US
11/510,495	24 August 2006 (24.08.2006)	US
11/514,720	31 August 2006 (31.08.2006)	US
11/553,971	27 October 2006 (27.10.2006)	US
60/869,713	12 December 2006 (12.12.2006)	US
60/890,174	15 February 2007 (15.02.2007)	US

(71) Applicant (for all designated States except US): **SPUD-NIK, INC.** [US/US]; 135 Riviera Drive, Apt. 435, Los Gatos, California 95032 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BUKESOV, Sergey A.** [RU/US]; 248 Pine Cone Strand, Acton, Massachusetts 01718 (US). **HAJJAR, Roger A.** [US/US]; 1050 Camino Ricardo, San Jose, California 95125 (US).

(74) Agents: **AI, Bing** et al.; Fish & Richardson P.C., P.O. Box 1022, Minneapolis, Minnesota 55440-1022 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

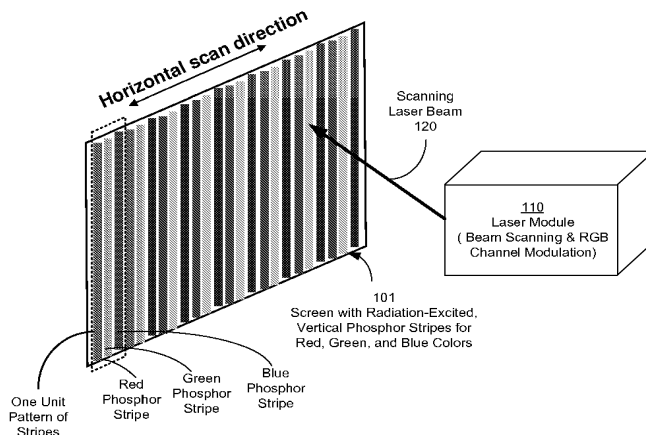
(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: PHOSPHOR COMPOSITIONS AND OTHER FLUORESCENT MATERIALS FOR DISPLAY SYSTEMS AND DEVICES



(57) Abstract: Various phosphor compositions and organic compounds can be used in fluorescent layers for scanning beam displays. In general, one aspect of the subject matter described in this specification can be embodied in a display device having a fluorescent layer that absorbs an excitation light at a single wavelength and emits visible light. The fluorescent layer includes a plurality of parallel fluorescent stripes. At least three adjacent fluorescent stripes are made of three different fluorescent materials, which include a first fluorescent material that absorbs the excitation light and emits light of a first color, a second fluorescent material that absorbs the excitation light and emits light of a second color, and a third fluorescent material that absorbs the excitation light and emits light of a third color.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**PHOSPHOR COMPOSITIONS AND OTHER FLUORESCENT MATERIALS FOR
DISPLAY SYSTEMS AND DEVICES**

[0001] This application claims the benefits of the following
5 prior patent applications:

[0002] 1. As a continuation-in-part of U.S. Patent
Application No. 11/116,998 entitled "Laser Displays Using UV-
Excitable Phosphors Emitting Visible Colored Light" and filed on
April 27, 2005;

10 **[0003]** 2. As a continuation-in-part of U.S. Patent
Application No. 11/335,813 entitled "Display Systems Having
Screens With Optical Fluorescent Materials" and filed on January
18, 2006;

[0004] 3. As a continuation-in-part of U.S. Patent
15 Application No. 11/337,170 entitled "Display Screens Having
Optical Fluorescent Materials" and filed on January 19, 2006;

[0005] 4. PCT Application No. PCT/US2006/11757 entitled
"Display Systems Having Screens With Optical Fluorescent
Materials" and filed on March 31, 2006;

20 **[0006]** 5. U.S. Provisional Patent Application No. 60/798,415
entitled "Phosphor Compositions And Other Fluorescent Materials
For Display Systems And Devices" and filed on May 5, 2006;

[0007] 6. U.S. Provisional Patent Application No. 60/799,316
entitled "Phosphor Compositions And Other Fluorescent Materials
25 For Display Systems And Devices" and filed on May 9, 2006;

[0008] 7. As a continuation-in-part of U.S. Patent
Application No. 11/510,495 entitled "Optical Designs for
Scanning Beam Display Systems Using Fluorescent Screens" and
filed on August 24, 2006;

30 **[0009]** 8. As a continuation-in-part of U.S. Application No.
11/514,720 entitled "Multilayered Fluorescent Screens for
Scanning Beam Display Systems" and filed on August 31, 2006;

[0010] 9. As a continuation-in-part of U.S. Application No. 11/553,971 entitled "Phosphor Compositions for Scanning Beam Displays" and filed on October 27, 2006;

[0011] 10. U.S. Provisional Patent Application No. 60/869,713
5 entitled "Phosphor Compositions for Scanning Beam Displays" and filed on December 12, 2006; and

[0012] 11. U.S. Provisional Patent Application No. 60/890,174 entitled "Organic Compounds for Adjusting Phosphor Chromaticity" and filed on February 15, 2007.

10 [0013] This application incorporates by reference the entire disclosures of the above applications as part of the specification of this application.

Background

15 [0014] This application relates to display systems that use screens with fluorescent materials to emit colored light under optical excitation, such as laser-based image and video displays and screen designs for such displays.

[0015] Many image and video displays are designed to directly
20 produce color images in different colors, such as red, green and blue and then project the color images on a screen. Such systems are often referred to as "projection displays" where the screen is simply a surface to make the color images visible to a viewer. Such projection displays may use white light sources
25 where white beams are filtered and modulated to produce images in red, green and blue colors. Alternatively, three light sources in red, green and blue may be used to directly produce three beams in red, green and blue colors and the three beams are modulated to produce images in red, green and blue.

30 Examples of such projection displays include digital light processing (DLP) displays, liquid crystal on silicon (LCoS)

displays, and grating light valve (GLV) displays. Notably, GLV displays use three grating light valves to modulate red, green and blue laser beams, respectively, and use a beam scanner to produce the color images on a screen. Another example of laser-based projection displays is described in U.S. Patent No.

5,920,361 entitled "Methods and apparatus for image projection."

Projection displays use optical lens systems to image and project the color images on the screen.

[0016] Some other image and video displays use a "direct"

configuration where the screen itself includes light-producing color pixels to directly form color images in the screen. Such direct displays eliminate the optical lens systems for projecting the images and therefore can be made relatively smaller than projection displays with the same screen sizes.

Examples of direct display systems include plasma displays, liquid crystal displays (LCDs), light-emitting-diode (LED) displays (e.g., organic LED displays), and field-emission displays (FEDs). Each color pixel in such direct displays includes three adjacent color pixels which produce light in red, green and blue, respectively, by either directly emit colored light as in LED displays and FEDs or by filtering white light such as the LCDs.

[0017] These and other displays are replacing cathode-ray tube (CRT) displays which dominated the display markets for decades since its inception. CRT displays use scanning electron beams in a vacuum tube to excite color phosphors in red, green and blue colors on the screen to emit colored light to produce color images. Although CRT displays can produce vivid colors and bright images with high resolutions, the use of cathode-ray tubes places severe technical limitations on the CRT displays and leads to dramatic decline in demand for CRT displays in recent years.

Summary

[0018] This specification describes phosphor compositions and non-phosphor organic materials used in fluorescent layers for scanning beam displays. In general, one aspect of the subject matter described in this specification can be embodied in a display device having a fluorescent layer that absorbs an excitation light at a single wavelength and emits visible light. The fluorescent layer includes multiple parallel fluorescent stripes. At least three adjacent fluorescent stripes are made of three different fluorescent materials, which include a first fluorescent material that absorbs the excitation light and emits light of a first color, a second fluorescent material that absorbs the excitation light and emits light of a second color, and a third fluorescent material that absorbs the excitation light and emits light of a third color.

[0019] Another aspect of the subject matter described in this specification can be embodied in a display device having a fluorescent layer that absorbs the excitation light at a single wavelength and emits white light. Optical filters are positioned relative to the fluorescent layer to receive the white light and to transmit light of different colors, respectively.

[0020] Yet another aspect of the subject matter described in this specification can be embodied in a method for adjusting the chromaticity and emission spectrum of the phosphor material. The method includes obtaining a binder material and one or more organic compounds. The method also includes generating a binder mixture based on the binder material and the one or more organic compounds, the binder mixture substantially transmits an excitation light and substantially absorbs a portion of the emission spectrum of the phosphor material. The method further

includes combining the binder mixture with the phosphor material.

[0021] A further aspect of the subject matter described in this specification can be embodied in another method for
5 adjusting the chromaticity and emission spectrum of the phosphor material. The method includes obtaining a binder material and one or more organic compounds. The method also includes combining the one or more organic compounds with a solution to produce a first mixture. The method further includes combining
10 the phosphor material with the first mixture to produce a second mixture. The method additionally includes generating a binder mixture based on the second mixture and the binder material, the binder mixture substantially transmits an excitation light and substantially absorbs a portion of the emission spectrum of the
15 phosphor material.

[0022] These and other embodiments can optionally include one or more of the following features. The fluorescent materials can include phosphor materials and non-phosphor materials such as organic materials. The phosphor materials can include an
20 Oxide-based phosphor, a Silicate-based phosphor, a Phosphate-based phosphor, a Borate-based phosphor, an Aluminate-based phosphor, a Gallate-based phosphor, a Molybdate-based phosphor, a Tungstate-based phosphor, a Fluoride-based phosphor, a Sulfide-based phosphor, a Nitride- and Oxynitride-based
25 phosphor, and a Sulfoselenide-based phosphor. The non-phosphor organic material can include, e.g., Fluorescein basic ethanol, Rhodamine 123, Rhodamine 6G, Rhodamine B, Rose Bengal, Brilliantulsulfoflavine FF, Basic yellow HG, and other organic dyes.

30 [0023] The Oxide-based phosphor can include (Y, Gd, La)₂O₃:(Eu, Sm, Ce, Bi); (Y, Gd, La)O₂S:(Eu, Sm, Ce, Bi); (Y, Gd,

La)VO₄(Eu, Sm, Ce, Bi); 2SrO·0.84P₂O₅·0.16B₂O₃:Eu; SrLa₂BeO₅:Ce;
 0.82BaO·6Al₂O₃:Eu; 1.29BaO·6Al₂O₃:Eu; (Ca, Zn)₂GeO₄:Mn; and (Tb_(1-x-y)(Y, La, Gd, Sm)_x(Ce, Pr, Nd, Sm, Eu, Gd, Dy, Ho, Er, Tm, Yb, Lu)_y)₃(Al, Ga, In)₂O₁₂. The Silicate-based phosphor can include
 5 (Mg, Ba, Sr, Ca, Zn)₂SiO₄:(Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr); (Mg, Ba, Sr, Ca)SiO₄:Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr; (Mg, Ba, Sr, Ca)SiO₅:Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr; ZrSiO₄:Pr; Ca₃Sc₂Si₃O₁₂:Ce; Y₂SiO₅:Tb; Y₂Si₂O₇:Tb; CaMgSiO:Ce; Ca₂MgSi₂O₇:Ce; (Ca, Sr)₂Al₂SiO₇:Ce; SrAl₂Si₂O₈:Eu; CaMgSi₂O₆:Eu; SrAl₁₀SiO₂₀:Eu;
 10 Sr₃MgSi₂O₈:Eu; Sr_{1..3}Mg_{0.7}SiO₄:Eu; (Ba, Sr, Ca)₃MgSi₂O₈:Eu; Y₂SiO₅:Ce; Sr₂Si₃O₈·2SrCl₂:Eu; BaSi₂O₅:Eu; and Sr₃MgSi₂O₇:Eu.

[0024] The Phosphate-based phosphor can include Zn₂(PO₄)₂:Mn; (Mg, Ba, Ca, Sr)₅(PO₄)₃Cl:(Eu, Sm, Ce); and (Sr, Ca, Eu)₁₀(PO₄)₆Cl₂·0.24B₂O₃. The Borate-based phosphor can include (Y, Gd, La, Lu)BO₃:Eu, Sm, Ce, Bi; Y(Mg, Ba, Ca, Sr)₃(Al, Ga, In)₃B₄O₁₅:Eu; and YCa₃Ga₃B₄O₁₅:Eu. The Aluminate-based phosphor can include (Y, Gd)₃Al₅O₁₂:(Eu, Ce, Pr); (Mg, Ba, Ca, Sr)MgAl₁₀O₁₇:(Eu, Mn); (Ca, Mg, Ba, Zn)Al₂O₄:(Mn, Eu, Dy); (Ba, Mg, Ca, Sr)MgAl₁₄O₂₃:Mn, Eu; (Mg, Ba, Ca, Sr)Al₁₂O₁₉:Mn; and
 15 BaMg₂Al₁₆O₂₇:Eu, Mn. The Gallate-based phosphor can include (Y, Gd)₃Ga₅O₁₂:(Eu, Ce, Pr); (Ca, Mg, Ba, Zn)Ga₂O₄:(Mn, Eu, Dy); ZnGa₂O₄:Mn; and (Li_{0.5}Ga_{0.5})_{0.5}Zn_{0.5}Ga₂O₄.

[0025] The Molybdate-based phosphor can include (Li, K, Na, Ag)Eu_(1-x)(Y, La, Gd)_xMo₂O₈ and (Li, K, Na, Ag)Eu_(1-x)(Y, La, Gd)_xMo₂O₈:Sm. The Tungstate-based phosphor can include (Li, K, Na, Ag)Eu_(1-x)(Y, La, Gd)_xW₂O₈; (Li, K, Na, Ag)Eu_(1-x)(Y, La, Gd)_xW₂O₈:Sm; and CaWO₄:Tb, Pb. The Fluoride-based phosphor can

include $(\text{KF}, \text{MgF}_2):\text{Mn}$, $\text{MgF}_2:\text{Mn}$, $(\text{Zn}, \text{Mg})\text{F}_2:\text{Mn}$;

$3.5\text{MgO} \cdot 0.5\text{MgF}_2 \cdot \text{GeO}_2:\text{Mn}$; and $\text{Mg}_4(\text{F})(\text{Ge}, \text{Sn})\text{O}_6:\text{Mn}$. The Sulfide-

based phosphor can include $(\text{Be}, \text{Mg}, \text{Ca}, \text{Sr}, \text{Ba}, \text{Zn})\text{S}:(\text{Eu}, \text{Ce},$

$\text{Cu}, \text{Ag}, \text{Al}, \text{Au}, \text{Tb}, \text{Cl}, \text{Pr}, \text{Mn}, \text{Bi})$; $(\text{Be}, \text{Mg}, \text{Ca}, \text{Sr}, \text{Ba},$

5 $\text{Zn})(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Gd})_2\text{S}_4:(\text{Eu}, \text{Ce}, \text{Cu}, \text{Ag}, \text{Al}, \text{Tb}, \text{Cl}, \text{Pr},$

$\text{Mn})$; $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})_2(\text{Zn}, \text{Si}, \text{Ge}, \text{Sn})\text{S}_3:\text{Eu}$; and $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba}$

$)_2(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Ga})_2\text{S}_3:\text{Eu}$.

[0026] The Nitride- and Oxynitride-based phosphor can include

$\text{Ca}_2\text{Si}_5\text{N}_8:\text{Eu}$; $\text{SrSi}_2\text{O}_2\text{N}_2:\text{Eu}$; $\text{CaAlSiN}_3:\text{Eu}$; Si_6AlON_8 ; $\text{Si}_3\text{N}_4\text{-M}_2\text{O}_3\text{-CaO-}$

10 $\text{AlN-Al}_2\text{O}_3$; $\text{LaSi}_3\text{N}_5:\text{Ce}$; $(\text{Li}, \text{Ca}, \text{Mg}, \text{Y})\text{Si}_{12}\text{AlON}_{16}$; $\text{Ce}, \text{P}, \text{Eu}, \text{Tb}, \text{Yb}, \text{Er},$

Dy . The Sulfoselenide-based phosphor can include $(\text{Be}, \text{Mg}, \text{Ca},$

$\text{Sr}, \text{Ba}, \text{Zn})\text{Se}_x\text{S}_{1-x}:(\text{Eu}, \text{Ce}, \text{Cu}, \text{Ag}, \text{Al}, \text{Tb}, \text{Cl}, \text{Pr}, \text{Mn})$ and $(\text{Be},$

$\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba}, \text{Zn})(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Gd})_2(\text{Se}_x\text{S}_{1-x})_4:(\text{Eu}, \text{Ce}, \text{Cu},$

$\text{Ag}, \text{Al}, \text{Tb}, \text{Cl}, \text{Pr}, \text{Mn})$.

15 **[0027]** The fluorescent materials can include $(\text{Mg}, \text{Ca}, \text{Sr},$

$\text{Ba})\text{S}:(\text{Eu}, \text{Mn})$, $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})\text{Se}_x\text{S}_{1-x}:(\text{Eu}, \text{Mn})$, $(\text{Zn}, \text{Cd})\text{S}:\text{Ag}, \text{Cl},$

$(\text{Zn}, \text{Cd})\text{S}:\text{Cu}, \text{Al}, (\text{KF}, \text{MgF}_2):\text{Mn}$, $\text{MgF}_2:\text{Mn}$, $(\text{Zn}, \text{Mg})\text{F}_2:\text{Mn}$,

$3.5\text{MgO} \cdot 0.5\text{MgF}_2 \cdot \text{GeO}_2:\text{Mn}$, $(\text{K}, \text{Li}, \text{Na})\text{EuW}_2\text{O}_8$, $(\text{Y}, \text{Gd}, \text{La})_2\text{O}_3:(\text{Eu}, \text{Sm},$

$\text{Bi})$, $(\text{Y}, \text{Gd}, \text{La})\text{O}_2\text{S}:\text{Eu}, \text{Sm}, \text{Bi}$, $(\text{Y}, \text{Gd}, \text{La})\text{BO}_3(\text{Eu}, \text{Sm}, \text{Bi})$, $(\text{Y},$

20 $\text{Gd}, \text{La})\text{VO}_4:(\text{Eu}, \text{Sm}, \text{Bi})$, and $\text{CaAlSiN}_3:\text{Eu}$. The fluorescent

materials can also include $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La},$

$\text{Gd})_2\text{S}_4:(\text{Eu}, \text{Mn})$, $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Gd})_2(\text{Se}_x\text{S}_{1-x})_4:(\text{Eu}, \text{Mn})$,

and $(\text{Ba}, \text{Sr}, \text{Ca})\text{SiO}_4:(\text{Eu}, \text{Mn})$. The fluorescent

materials can further include $(\text{Ba}, \text{Mg}, \text{Sr})\text{Al}_{10}\text{O}_{17}:(\text{Eu}, \text{Mn})$ and

25 $(\text{Sr}, \text{Ca}, \text{Ba}, \text{Mg})_{10}(\text{PO}_4)_6\text{Cl}_{12}:\text{Eu}$.

[0028] The fluorescent layer can include a first optical absorbent material mixed in the first fluorescent material that

absorbs light of the second and third colors and transmits light of the first color; a second optical absorbent material mixed in the second fluorescent material that absorbs light of the first and third colors and transmits light of the second color; and a third optical absorbent material mixed in the third fluorescent material that absorbs light of the first and second colors and transmits light of the third color. The first optical absorbent material, the second optical absorbent material, and the third optical absorbent material can substantially transmit the excitation light. The excitation light can be at an ultra violet wavelength. The excitation light can also be at a violet wavelength. The excitation light can further be at a wavelength less than about 420 nanometers.

[0029] The fluorescent layer can include

$8\text{SrCO}_3 \cdot 4\text{CaCO}_3 \cdot 11\text{Al}_2\text{O}_3 \cdot 0.18\text{Eu}_2\text{O}_3$; $3\text{Ca}_3(\text{PO}_4)_2 \cdot \text{Ca}(\text{F}, \text{Cl})_2 : \text{Sb}$; $3\text{Ca}_3(\text{PO}_4)_2 \cdot \text{Ca}(\text{F}, \text{Cl})_2 : \text{Sb, Mn}$; $3\text{Ca}_3(\text{PO}_4)_2 \cdot \text{Ca}(\text{F}, \text{Cl})_2 : \text{Sb}$; $\text{BaO} \cdot \text{TiO}_2\text{P}_2\text{O}_5$; and MgWO_4 . The fluorescent layer can further include a mixture of ZnS:Ag with either $(\text{Zn}, \text{Cd})\text{S:Cu, Al}$; ZnS:Cu, Al ; or a combination of $\text{Zn}_2\text{SiO}_4 : \text{Mn}$ and $(\text{Zn}, \text{Mg})_3(\text{PO}_4)_2 : \text{Mn}$.

[0030] These and other examples and implementations are described in detail in the drawings, the detailed description and the claims.

Brief Description of the Drawings

[0031] FIG. 1 shows an example scanning laser display system having a fluorescent screen made of laser-excitable phosphors emitting colored lights under excitation of a scanning laser beam that carries the image information to be displayed.

[0032] FIGS. 2A and 2B show one example screen structure and the structure of color pixels on the screen in FIG. 1.

[0033] FIG. 3 shows an example implementation of the laser module in FIG. 1 having multiple lasers that direct multiple laser beams on the screen.

[0034] FIGS. 4A and 4B show scanning beam displays using
5 fluorescent screens where a polygon scanner is positioned upstream from a galvo mirror along the propagation direction of an excitation beam.

[0035] FIG. 5 shows a fluorescent screen design with a contrast enhancement layer.

10 [0036] FIG. 6A shows a fluorescent screen design with a contrast enhancement material composition in each fluorescent stripe.

[0037] FIG. 6B-D show the transmission characteristics for Red, Green, and Blue color pigments used as the contrast
15 enhancement material in FIG. 6A.

[0038] FIG. 7 illustrates an example of a fluorescent screen design that has a contiguous and uniform layer of mixed phosphors that emits white light.

[0039] FIG. 8 shows a table of organic material that can be
20 used as fluorescent material.

[0040] FIG. 9 shows a table of organic dyes that can be used as fluorescent material or added to a phosphor material to adjust the emission spectrum of the phosphor.

[0041] FIG. 10 shows the emission spectra of the organic dyes
25 listed in FIG. 9.

[0042] FIG. 11 shows the absorption and fluorescence spectra of organic materials, Fluorescein, basic ethanol and Eosin Y.

[0043] FIG. 12 shows the absorption and fluorescence spectra of organic materials, Rhodamine 123 and Rhodamine 6G.

30 [0044] FIG. 13 shows the absorption and fluorescence spectra of organic materials, Rhodamine B and Rose bengal.

[0045] FIG. 14 shows that an organic material, e.g., Rhodamine B, can be added to an orange phosphor to adjust the emission spectrum of the phosphor.

[0046] FIG. 15 shows the shifting of an orange phosphor emission spectrum when combined with various concentrations of Rhodamine B.

[0047] FIG. 16 shows a comparison of the emission spectra of an orange phosphor and a mixture of the orange phosphor and Rhodamine B organic compound.

[0048] FIG. 17A shows the x-chromaticity performance of the adjusted orange phosphors as a function of Rhodamine B concentration.

[0049] FIG. 17B shows the y-chromaticity performance of the adjusted orange phosphors as a function of Rhodamine B concentration.

[0050] FIG. 18 shows an example implementation of a post-objective scanning beam display system.

[0051] Like reference symbols in the various drawings indicate like elements.

Detailed Description

[0052] This application describes scanning beam display systems that use screens with fluorescent materials to emit light under optical excitation to produce images, including laser video display systems. Various examples of screen designs with fluorescent materials are described. Screens with phosphor materials under excitation of one or more scanning excitation laser beams are described in detail and are used as specific implementation examples of optically excited fluorescent materials in various system and device examples in this application.

[0053] In one implementation, for example, three different color phosphors that are optically excitable by the laser beam to respectively produce light in red, green, and blue colors suitable for forming color images may be formed on the screen as pixel dots or periodic red, green and blue phosphor stripes in parallel. Various examples described in this application use screens with parallel color phosphor stripes for emitting light in red, green, and blue to illustrate various features of the laser-based displays.

[0054] Phosphor materials are one type of fluorescent materials. Various described systems, devices and features in the examples that use phosphors as the fluorescent materials are applicable to displays with screens made of other optically excitable, light-emitting, non-phosphor organic fluorescent materials.

[0055] Examples of scanning beam display systems described here use at least one scanning laser beam to excite color light-emitting materials deposited on a screen to produce color images. The scanning laser beam is modulated to carry images in red, green and blue colors or in other visible colors and is controlled in such a way that the laser beam excites the color light-emitting materials in red, green and blue colors with images in red, green and blue colors, respectively. Hence, the scanning laser beam carries the images but does not directly produce the visible light seen by a viewer. Instead, the color light-emitting fluorescent materials on the screen absorb the energy of the scanning laser beam and emit visible light in red, green and blue or other colors to generate actual color images seen by the viewer.

[0056] Laser excitation of the fluorescent materials using one or more laser beams with energy sufficient to cause the fluorescent materials to emit light or to luminesce is one of

various forms of optical excitation. In other implementations, the optical excitation may be generated by a non-laser light source that is sufficiently energetic to excite the fluorescent materials used in the screen. Examples of non-laser excitation

5 light sources include various light-emitting diodes (LEDs), light lamps and other light sources that produce light at a wavelength or a spectral band to excite a fluorescent material that converts the light of a higher energy into light of lower energy in the visible range. The excitation optical beam that
10 excites a fluorescent material on the screen can be at a frequency or in a spectral range that is higher in frequency than the frequency of the emitted visible light by the fluorescent material. Accordingly, the excitation optical beam may be in the violet spectral range and the ultra violet (UV)
15 spectral range, e.g., wavelengths under 420 nm. In the examples described below, UV light or a UV laser beam is used as an example of the excitation light for a phosphor material or other fluorescent material and may be light at other wavelength.

[0057] FIG. 1 illustrates an example of a laser-based display
20 system using a screen having color phosphor stripes.

Alternatively, color phosphor dots may also be used to define the image pixels on the screen. The system includes a laser module 110 to produce and project at least one scanning laser beam 120 onto a screen 101. The screen 101 has parallel color
25 phosphor stripes in the vertical direction where red phosphor absorbs the laser light to emit light in red, green phosphor absorbs the laser light to emit light in green and blue phosphor absorbs the laser light to emit light in blue. Adjacent three color phosphor stripes are in three different colors. One
30 particular spatial color sequence of the stripes is shown in FIG. 1 as red, green and blue. Other color sequences may also be used. The laser beam 120 is at the wavelength within the

optical absorption bandwidth of the color phosphors and is usually at a wavelength shorter than the visible blue and the green and red colors for the color images. As an example, the color phosphors may be phosphors that absorb UV light in the spectral range from about 380 nm to about 420 nm to produce desired red, green and blue light. The laser module 110 can include one or more lasers such as UV diode lasers to produce the beam 120, a beam scanning mechanism to scan the beam 120 horizontally and vertically to render one image frame at a time on the screen 101, and a signal modulation mechanism to modulate the beam 120 to carry the information for image channels for red, green and blue colors. Such display systems may be configured as rear projection systems where the viewer and the laser module 110 are on the opposite sides of the screen 101. Alternatively, such display systems may be configured as front projection systems where the viewer and laser module 110 are on the same side of the screen 101.

[0058] FIG. 2A shows an exemplary design of the screen 101 in FIG. 1. The screen 101 may include a rear substrate 201 which is transparent to the scanning laser beam 120 and faces the laser module 110 to receive the scanning laser beam 120. A second front substrate 202, is fixed relative to the rear substrate 201 and faces the viewer in a rear projection configuration. A color phosphor stripe layer 203 is placed between the substrates 201 and 202 and includes phosphor stripes. The color phosphor stripes for emitting red, green and blue colors are represented by "R", "G" and "B," respectively. The front substrate 202 is transparent to the red, green and blue colors emitted by the phosphor stripes. The substrates 201 and 202 may be made of various materials, including glass or plastic panels. Each color pixel includes portions of three adjacent color phosphor stripes in the horizontal direction and

its vertical dimension is defined by the beam spread of the laser beam 120 in the vertical direction. As such, each color pixel includes three subpixels of three different colors (e.g., the red, green and blue). The laser module 110 scans the laser beam 120 one horizontal line at a time, e.g., from left to right and from top to bottom to fill the screen 101. The laser module 110 is fixed in position relative to the screen 101 so that the scanning of the beam 120 can be controlled in a predetermined manner to ensure proper alignment between the laser beam 120 and each pixel position on the screen 101.

[0059] In FIG. 2A, the scanning laser beam 120 is directed at the green phosphor stripe within a pixel to produce green light for that pixel. FIG. 2B further shows the operation of the screen 101 in a view along the direction B-B perpendicular to the surface of the screen 101. Since each color stripe is longitudinal in shape, the cross section of the beam 120 may be shaped to be elongated along the direction of the stripe to maximize the fill factor of the beam within each color stripe for a pixel. This may be achieved by using a beam shaping optical element in the laser module 110. A laser source that is used to produce a scanning laser beam that excites a phosphor material on the screen may be a single mode laser or a multimode laser. The laser may also be a single mode along the direction perpendicular to the elongated direction phosphor stripes to have a small beam spread that is confined by the width of each phosphor stripe. Along the elongated direction of the phosphor stripes, this laser beam may have multiple modes to spread over a larger area than the beam spread in the direction across the phosphor stripe. This use of a laser beam with a single mode in one direction to have a small beam footprint on the screen and multiple modes in the perpendicular direction to have a larger footprint on the screen allows the beam to be shaped to fit the

elongated color subpixel on the screen and to provide sufficient laser power in the beam via the multimodes to ensure sufficient brightness of the screen.

[0060] Each of the fluorescent stripes in the fluorescent screen 101 in various examples described in this application is a fluorescent stripe that emits a designated color under optical excitation and can be a fluorescent stripe formed of a particular fluorescent material that emits the designed color as shown in the example in FIG. 2A. Alternatively, a fluorescent stripe can be constructed by a combination of a stripe color filter over a contiguous and uniform white fluorescent layer that is made of mixed phosphors that emit white light under optical excitation of the excitation light 120. Hence, a filter layer of color filters, such as stripes of red-transmitting, green-transmitting and blue-transmitting filters, is placed on the viewer side of the mixed phosphor layer to filter the white light and to produce colored output light. The details of the construction of the fluorescent stripes are described in a later section of this specification with reference to FIG. 7. In this context, a fluorescent layer has a composite structure with a filter layer and a contiguous fluorescent layer that emits white light.

[0061] Referring now to FIG. 3, an example implementation of the laser module 110 in FIG. 1 is illustrated. A laser array 310 with multiple lasers is used to generate multiple laser beams 312 to simultaneously scan the screen 101 for enhanced display brightness. A signal modulation controller 320 is provided to control and modulate the lasers in the laser array 310 so that the laser beams 312 are modulated to carry the image to be displayed on the screen 101. The signal modulation controller 320 can include a digital image processor that generates digital image signals for the three different color

channels and laser driver circuits that produce laser control signals carrying the digital image signals. The laser control signals are then applied to modulate the lasers, e.g., the currents for laser diodes, in the laser array 310.

5 **[0062]** The beam scanning can be achieved by using a scanning mirror 340 such as a galvo mirror for the vertical scanning and a multi-facet polygon scanner 350 for the horizontal scanning. A scan lens 360 can be used to project the scanning beams from the polygon scanner 350 onto the screen 101. The scan lens 360 is
10 designed to image each laser in the laser array 310 onto the screen 101. Each of the different reflective facets of the polygon scanner 350 simultaneously scans N horizontal lines where N is the number of lasers. In the illustrated example, the laser beams are first directed to the galvo mirror 340 and
15 then from the galvo mirror 340 to the polygon scanner 350. The output scanning beams 120 are then projected onto the screen 101. A relay optics module 330 is placed in the optical path of the laser beams 312 to modify the spatial property of the laser beams 312 and to produce a closely packed bundle of beams 332
20 for scanning by the galvo mirror 340 and the polygon scanner 350 as the scanning beams 120 projected onto the screen 101 to excite the phosphors and to generate the images by colored light emitted by the phosphors.

25 **[0063]** The laser beams 120 are scanned spatially across the screen 101 to hit different color pixels at different times. Accordingly, each of the modulated beams 120 carries the image signals for the red, green and blue colors for each pixel at different times and for different pixels at different times. Hence, the beams 120 are coded with image information for
30 different pixels at different times by the signal modulation controller 320. The beam scanning thus maps the time-domain coded image signals in the beams 120 onto the spatial pixels on

the screen 101. For example, the modulated laser beams 120 can have each color pixel time equally divided into three sequential time slots for the three color subpixels for the three different color channels. The modulation of the beams 120 may use pulse
5 modulation techniques to produce desired grey scales in each color, a proper color combination in each pixel, and desired image brightness.

[0064] In one implementation, the multiple beams 120 are directed onto the screen 101 at different and adjacent vertical
10 positions with two adjacent beams being spaced from each other on the screen 101 by one horizontal line of the screen 101 along the vertical direction. For a given position of the galvo mirror 340 and a given position of the polygon scanner 350, the beams 120 may not be aligned with each other along the vertical
15 direction on the screen 101 and may be at different positions on the screen 101 along the horizontal direction. The beams 120 can only cover one portion of the screen 101. At a fixed angular position of the galvo mirror 340, the spinning of the polygon scanner 350 causes the beams 120 from N lasers in the
20 laser array 310 to scan one screen segment of N adjacent horizontal lines on the screen 101. At the end of each horizontal scan over one screen segment, the galvo mirror 340 is adjusted to a different fixed angular position so that the vertical positions of all N beams 120 are adjusted to scan the
25 next adjacent screen segment of N horizontal lines. This process iterates until the entire screen 101 is scanned to produce a full screen display.

[0065] The stripe design in FIG. 2B for the fluorescent screen 101 in FIGS. 1 and 3 can be implemented in various
30 configurations. FIG. 2A shows one example which places the fluorescent layer 203 such as a color phosphor stripe layer between two substrates 201 and 202. In a rear projection

system, it is desirable that the screen 101 couple as much light as possible in the incident scanning excitation beam 120 into the fluorescent layer with while maximizing the amount of the emitted light from the fluorescent layer that is directed
5 towards the viewer side. A number of screen mechanisms can be implemented, either individually or in combination, in the screen 101 to enhance the screen performance, including efficient collection of the excitation light, maximization of fluorescent light directed towards the viewer side, enhancement
10 of the screen contrast and reduction the screen glare. The structure and materials of the screen 101 can be designed and selected to meet constraints on cost and other requirements for specific applications.

[0066] In FIG. 3, the beam scanning is achieved by using the
15 galvo mirror 340 for vertical scanning to direct an excitation beam to the polygon scanner 350 which in turn directs the excitation beam onto the screen 101. Alternatively, the polygon scanner 350 can be used to scan the excitation beam onto the galvo mirror 350 which further directs the beam to the screen
20 101. FIGS. 4A and 4B show two examples of such scanning beam display systems in which the order of the polygon scanner 350 and the galvo mirror 340 is reversed from the order in FIG. 3. The display in FIG. 4B uses N acousto optic modulators 410 to respectively modulate N continuous-wave (CW) excitation laser
25 beams 312 from the laser array 310 to produce modulated laser beams 332 which carry image data. Other optical modulators may also be used to replace the acousto optic modulators 410.

[0067] FIG. 5 shows one example of a screen 500 that uses a contrast enhancement layer 510 on the viewer side of the
30 fluorescent layer 520. The fluorescent layer 520 includes parallel phosphor stripes. Accordingly, the contrast enhancement layer 510 also includes matching parallel stripes

made of different materials. For a red phosphor stripe 521 that emits red light in response to excitation by the excitation light (e.g., UV or violet light), the matching stripe 511 in the contrast enhancement layer 510 is made of a "red" material that transmits in a red spectral band covering the red light emitted by the red phosphor stripe 521 and absorbs or otherwise blocks other visible light including the green and blue light.

Similarly, for a green phosphor stripe that emits green light in response to excitation by UV light, the matching stripe in the contrast enhancement layer 510 is made of a "green" material that transmits in a green spectral band covering the green light emitted by the green phosphor and absorbs or otherwise blocks other visible light including the red and blue light. For a blue phosphor stripe that emits blue light in response to

excitation by UV light, the matching stripe in the contrast enhancement layer 510 is made of a "blue" material that transmits in a blue spectral band covering the blue light emitted by the blue phosphor and absorbs or otherwise blocks other visible light including the green and red light. These matching parallel stripes in the contrast enhancement layer 510 are labeled as "R," "G" and "B," respectively.

[0068] In this example, the contrast enhancement layer 510 includes different stripe filtering regions that spatially align with and match respective fluorescent regions along the direction perpendicular to the screen. Each filtering region transmits light of a color that is emitted by a corresponding matching fluorescent region and blocks light of other colors. Different filtering regions in the layer 510 may be made of materials that absorb light of other colors different from the colors emitted by the respective matching fluorescent regions. Examples of suitable materials include dye-based colorants and pigment-based colorants. In addition, each filtering region in

the contrast enhancement layer 510 can be a multi-layer structure that effectuates a band-pass interference filter with a desired transmission band. Various designs and techniques may be used for designing and constructing such filters. U.S.

5 Patent No. 5,587,818 entitled "Three color LCD with a black matrix and red and/or blue filters on one substrate and with green filters and red and/or blue filters on the opposite substrate," and U.S. Patent No. 5,684,552 entitled "Color liquid crystal display having a color filter composed of multilayer
10 thin films" describe examples of red, green and blue filters that may be used in the layer 510 in the screen 500 in FIG. 5.

[0069] In operation, the excitation light 120 (e.g., UV light) enters the fluorescent layer 520 to excite different phosphors to emit visible light of different colors. The
15 emitted visible light transmits through the contrast enhancement layer 510 to reach the viewer. The ambient light 501 incident to the screen 800 enters the contrast enhancement layer 510 and a portion of the incident ambient light 501 is reflected towards the viewer by passing through the contrast enhancement layer 510
20 for the second time. Therefore, the total optical output 502 towards the viewer includes image-carrying colored visible light emitted by the phosphor layer 520 and the reflected ambient light. This reflected ambient light does not carry image and thus tends to wash out the image produced at the phosphor layer
25 520. Because this reflected ambient light towards the viewer has passed the contrast enhancement layer 510 twice and thus has been filtered and attenuated twice, the intensity of the reflected ambient light is reduced by approximately two thirds of that of the received ambient light. As an example, the green
30 and blue portions of the incident ambient light 501 comprise approximately two thirds of the flux of the ambient light 501 entering a red subpixel. The green and blue portions of the

incident ambient light 501 are blocked by the contrast enhancement layer 510. Only the red portion of the ambient light within the transmission band of the red filter material in the contrast enhancement layer 510 transmits through the layer 510 and a part of the transmitted red ambient light is reflected back to the viewer. This part of the reflected ambient light is essentially the same color for the subpixel generated by the underlying color phosphor stripe and thus the color contrast is not adversely affected.

[0070] The above use of a color-selective absorbent material in the contrast enhancement layer 510 for each subpixel to enhance the display contrast can also be implemented by mixing such a material with the light-emitting fluorescent material in each subpixel without a separate contrast enhancement layer. In one implementation, each phosphor region in the fluorescent layer design can be formed of a mixture of a fluorescent material and a color-selective absorbent material that transmits light emitted by the fluorescent material and absorbs light of other colors. Hence, the contrast enhancing feature is built into each subpixel to reduce the reflected ambient light to the viewer.

[0071] FIG. 6A shows another implementation that uses red, green, and blue phosphor materials with built-in contrast-enhancing capability for emitting red, green and blue light, respectively, in a common fluorescent layer 610 of parallel fluorescent stripes. Consider three consecutive red, green and blue phosphor stripes 611, 612 and 613. The material for the red phosphor stripe 611 is a mixture of a red phosphor capable of emitting red light and a red ink or pigment which transmits the red light and absorbs other light including the green and blue light. Additionally, the red ink or pigment can have a transmission characteristic 630 as shown in FIG. 6B. Since the

red ink or pigment is mixed with the red phosphor, one of the notable characteristics is that the red ink or pigment substantially transmits (~100%) below the wavelength of around 420 nm in order to prevent absorbing the excitation light.

5 Furthermore, the red ink or pigment can substantially transmit at a wavelength above around 580 nm to allow for the emitted red color from the red phosphors.

[0072] The material for the green phosphor stripe 612 is a mixture of a green phosphor emitting green light and a green ink
10 or pigment which transmits the green light and absorbs other light including the red and blue light. Additionally, the green ink or pigment can have a transmission characteristic 640 as shown in FIG. 6C. Since the green ink or pigment is mixed with the green phosphor, one of the notable characteristics is that
15 the green ink or pigment substantially transmits (~100%) below the wavelength of around 420 nm in order to prevent absorbing the excitation light. Furthermore, the green ink or pigment can substantially transmit at a wavelength window of above around 480 nm and below about 580 nm to allow for the emitted green
20 color from the green phosphors.

[0073] The material for the blue phosphor stripe 613 is a mixture of a blue phosphor emitting blue light and a blue ink or pigment which transmits the blue light and absorbs other light including the red and green light. Additionally, the blue ink
25 or pigment can have a transmission characteristic 650 as shown in FIG. 6D. Since the blue ink or pigment is mixed with the blue phosphor, one of the notable characteristics is that the blue ink or pigment substantially transmits (~100%) below the wavelength of around 480 nm in order to prevent absorbing the
30 excitation light (below ~420nm) and to allow for the emitted blue color from the blue phosphors.

[0074] The contrast-enhancing fluorescent layer 610 can be combined with various screen designs and configurations described in this application.

[0075] The above described fluorescent screens use different
5 phosphor materials in different fluorescent stripes to produce different colors under excitation of the excitation light.

Alternatively, different fluorescent stripes can be formed by the same fluorescent material that emits white light and can further include color filters to produce desired different
10 colors from the fluorescent light. The contrast enhancement layer 510 in FIG. 5 can be used to implement such color filters so that each color filter achieves both contrast enhancement and generation of a designated subpixel color.

[0076] FIG. 7 illustrates an example of a fluorescent screen

15 design that has a contiguous and uniform layer 700 of mixed phosphors. This mixed phosphor layer 700 is designed and constructed to emit white light under optical excitation of excitation light. The mixed phosphors in the mixed phosphor layer 700 can be designed in various ways and a number of
20 compositions for the mixed phosphors that emit white light are known and documented. Other non-phosphor fluorescent materials that emit white light can also be used for the layer 700. As illustrated, a layer 510 of color filters, such as stripes of red-transmitting, green-transmitting and blue-transmitting
25 filters, is placed on the viewer side of the mixed phosphor layer 700 to filter the white light and to produce colored output towards the viewer. In this example, the layers 700 and 510 are sandwiched between substrates 701 and 702. The color filters in the layer 510 may be implemented in various
30 configurations, including in designs similar to the color filters used in color LCD panels. In each color filter region e.g., a red-transmitting filter, the filter transmits the red

light and absorbs light of other colors including green light and blue light.

[0077] The screen structure in FIG. 7 is simpler than other screen designs with different fluorescent stripes because the mixed phosphor layer 700 in FIG. 7 is a contiguous layer without striped spatial structures. This construction avoids alignment issues associated with aligning the filters in layer 510 with respective fluorescent stripes in the layer 520 in FIG. 5. The substrate 701 receives the excitation light and thus can be made of a material transparent to the excitation light, e.g., violet or UV light. The substrate 702 faces the viewer and can be made of a material transparent to the colored light filtered by the filters in the layer 510. In fabrication, the layer 510 can be fabricated on the substrate 702 and the layer 700 can be fabricated on the substrate 701. The two substrates 701 and 702 can be engaged to each other to form the screen. At the output surface of the second substrate 702, an anti-reflection coating (AR) may be formed to improve the light transmission to the viewer. In addition, a hard protection layer may be formed over the second substrate 702 to protect the screen surface.

[0078] UV-excitable phosphors suitable of color or monochromatic screens described in this application may be implemented with various material compositions. Typically, such phosphors absorb excitation light such as UV light to emit photons in the visible range at wavelengths longer than the excitation light wavelength. For example, red, green, and blue fluorescent materials may be ZnCdS:Ag, ZnS:Cu, and ZnS:Ag, respectively.

TABLE 1 Examples of Phosphors

Patent Publications #	Phosphor System(s)
--------------------------	--------------------

WO 02/11173 A1	MS:Eu; M=Ca, Sr, Ba, Mg, Zn M ⁺ N ⁺ ₂ S ₄ :Eu,Ce; M ⁺ =Ca, Sr, Ba, Mg, Zn; N ⁺ =Al, Ga, In, Y, La, Gd
US6417019B1	(Sr _{1-u-v-x} Mg _u Ca _v Ba _x)(Ga _{2-y-z} Al _y In _z S ₄):Eu ²⁺
US2002/0185965	YAG:Gd,Ce,Pr, SrS, SrGa ₂ S ₄
WO 01/24229 A2	CaS:Eu ²⁺ /Ce ³⁺ , SrS: Eu ²⁺ /Ce ³⁺ SrGa ₂ S ₄ :Eu ²⁺ /Ce ³⁺
US Application 20040263074	SrS:Eu ²⁺ ; CaS:Eu ²⁺ ; CaS:Eu ²⁺ ,Mn ²⁺ ; (Zn,Cd)S:Ag ⁺ ; Mg ₄ GeO _{5,5} F:Mn ⁴⁺ ; ZnS:Mn ²⁺ .
WO 00/33389	Ba ₂ MgSi ₂ O ₇ :Eu ²⁺ ; Ba ₂ SiO ₄ :Eu ²⁺ ; (Sr,Ca,Ba)(Al,Ga) ₂ S ₄ :Eu ²⁺
US20010050371	(Li, K, Na, Ag)Eu _(1-x) (Y, La, Gd;) _x (W,Mo) ₂ O ₈ ; Y _x Gd _{3-x} Al ₅ O ₁₂ :Ce
US6252254 B1	YBO ₃ :Ce ³⁺ , Tb ³⁺ ; BaMgAl ₁₀ O ₁₇ :Eu ²⁺ , Mn ²⁺ ; (Sr, Ca, Ba)(Al, Ga) ₂ S ₄ :Eu ²⁺ ; Y ₃ Al ₅ O ₁₂ :Ce ³⁺ Y ₂ O ₂ S:Eu ³⁺ , Bi ³⁺ ; YVO ₄ :Eu ³⁺ , Bi ³⁺ ; SrS:Eu ²⁺ ; SrY ₂ S ₄ :Eu ²⁺ ; CaLa ₂ S ₄ :Ce ³⁺ ; (CaSr)S:Eu ²⁺
US2002/0003233	Y-Al-O; (Y, Ln)-Al-O; (Y, Ln)-(Al, Ga)-O SrGa ₂ S ₄ ; SrS M-Si-N [Ce, Pr, Ho, Yb, Eu]
EP 1150361 A1	(Sr,Ca,Ba)S:Eu ²⁺ (SrS:Eu ²⁺)
US 20020145685	Display device using blue LED and red, green phosphors SrS:Eu ²⁺ and SrGa ₂ S ₄ :Eu ²⁺
US 20050001225	(Li,Ca,Mg,Y) _x Si _{12-(m+n)} Al _(m+n) O _n N _{16-n} : Ce,P,Eu,Tb,Yb, Er, Dy
US 5,998,925	(Y, Lu, Se, La, Gd, Sm)(Al, Ga)O:Ce
US 6,765,237	BaMg ₂ Al ₁₆ O ₂₇ :Eu ²⁺ (BAM) and (Tb _(1-x-y) (Y, La, Gd, Sm) _x (Ce, Pr, Nd, Sm, Eu, Gd, Dy, Ho, Er, Tm, Yb, Lu) _y) ₃ (Al, Ga, In) _z O ₁₂ (TAG)
US 6,809,347	Silicate phosphor
US Application 20040227465	Sr _x Ba _y Ca _z SiO ₄ :Eu ²⁺ , Ce, Mn, Ti, Pb, Sn
US Application 20050023962	ZnSe(x)S(1-x): (Cu,Ag, Al, Ce, Tb, Cl, I, Mg, Mn)
US Application 20050023963	(Be, Mg, Ca, Sr, Ba, Zn)(Al, Ga, In, Y, La, and Gd) ₂ (S _x Se _y) ₄ :Eu,Ce,Cu,Ag, Al, Tb, Cl, Br, F, I, Mg, Pr, K, Na, Mn

[0079] TABLE 1 lists some examples of phosphors that emit visible color light when excited by excitation light in the wavelength range from 380 nm to 415 nm described in various published patent documents. Various phosphors listed in TABLE 1 can also be excited by light from 450 nm to 470 nm. These and other phosphors can be used to implement the phosphor-based laser displays described in this application.

[0080] The examples of phosphors described in the published PCT application No. WO 02/11173 A1 are "Type I" phosphors with

compositions of Eu-doped photoluminescent metal sulfides in form of MS:Eu where M is at least one of Ca, Sr, Ba, Mg and Zn, and "Type II" phosphors with compositions of metal thiometallate photoluminescent materials in form of $M^*N^*_2S_4$:Eu,Ce where M^* is at least one of Ca, Sr, Ba, Mg and Zn, and N^* is at least one of Al, Ga, In, Y, La and Gd. A photoluminescent metal sulfide MS (Type I phosphor) may include at least one of Ba, Mg, and Zn alone or in combination with at least one of Sr and Ca. A metal thiometallate photoluminescent material $M^*N^*_2S_4$ (type II phosphor) may include at least one element selected from the group $M^*=Mg$ and Zn alone for M^* or in combination with at least one of Ba, Sr and Ca and the element N^* may be Al or Ga alone or in further combination with In, Y, La, Gd. A metal thiometallate photoluminescent material may be activated with at least one of europium (Eu) and cerium (Ce). Two or more of type I and type II phosphors may be combined, or one or more phosphors of type I and type II phosphors may be combined with other phosphors different from phosphors of type I and type II to form a phosphor blend to generate a color that may not be available from individual type I and type II phosphors..

[0081] Specific examples of the phosphor compositions for the type I phosphors for emitting red colors include $(Sr_{1-x-y}M_xEu_y)S$ with M is at least one of Ba, Mg, Zn alone or in combination with Ca and $0 < x \leq 0.5$ and $0 < y \leq 0.10$, $(Sr_{1-x-y}Ba_xEu_y)S$ with $x \leq 0.25$, $(Sr_{1-x-z-y}Ca_xBa_zEu_y)S$ with $x+y+z \leq 0.35$ which exhibit a high quantum efficiency of 65-80%, high absorbance in the range from 370 nm to 470 nm of 60-80% and low loss, below 10%, of the luminescent lumen output from room temperature to 100°C due to thermal quenching. Specific examples of type II phosphor compositions are $M^*N^*_2S_4$:Eu,Ce (type II phosphor) where M^* is at least one of $M^*=Mg$, Zn alone or together with at least one of Ba, Sr, Ca, and N^* is at least one of $N^*=Al$, Ga, alone or together with small

amounts (below 20%) of In, Y, La, Gd. Such type II phosphors emit light in the blue, green or green-yellow spectral range of the visible spectrum. Specific compositions for the type II phosphors include $(M^{**}_{1-u}Mg_u)(Ga_{1-v}N^*_v)_2S_4:Ce$ with $u \leq 0.75$ and $v \leq 0.10$, and M^{**} is at least one of $M^{**}=Ba, Sr, Ca, Zn$, $(M^{**}_{1-s-t}Eu_sCe_t)(Ga_{1-v}N^*_v)_2S_4$ with M^{**} is at least one of $=Mg, Zn$ alone or in combination with Sr, Ba, Ca , and $N^*=Al, In, Y, La, Gd$ and $0 < s \leq 0.10$ and $0 \leq t:s < 0.2$ with $v \leq 0.10$, $((Ba_{1-u}Mg_u)_{1-s-t}Eu_sCe_t)(Ga_{1-v}N^*_v)_2S_4$ with $u \leq 0.75$ and $v \leq 0.10$ and $0 < s \leq 0.10$ and $0 \leq t:s < 0.2$, $((Ba_{1-w}Ca_w)_{1-u}Mg_u)_{1-s-t}Eu_sCe_t)(Ga_{1-v}N^*_v)_2S_4$ with $u < 0.75$ and $w \geq 0.10$ and $v < 0.10$ and $0 < s \leq 0.10$ and $0 \leq t:s < 0.2$, $((Ba_{1-r}Sr_r)_{1-u}Mg_u)_{1-s-t}Eu_sCe_t)(Ga_{1-v}N^*_v)_2S_4$ with $u < 0.75$ and $r \geq 0.10$ and $v \leq 0.10$ and $0 < s \leq 0.10$ and $0 \leq t:s < 0.2$, $((Sr_{1-w}Ca_w)_{1-u}Mg_u)_{1-s-t}Eu_sCe_t)(Ga_{1-v}N^*_v)_2S_4$ with $u \leq 0.75$ and $w \geq 0.10$ and $v \leq 0.10$ and $0 < s \leq 0.10$ and $t:s < 0.2$, and $((Sr_{1-p}Zn_p)_{1-u}Mg_u)_{1-s-t}Eu_sCe_t)(Ga_{1-v}N^*_v)_2S_4$ with $u < 0.75$ and $p \leq 0.35$ and $v \leq 0.10$ and $0 < s \leq 0.10$ and $0 \leq t:s < 0.2$.

[0082] The examples of phosphors described in U.S. patent No. 6,417,019 include $(Sr_{1-u-v-x}Mg_uCa_vBa_x)(Ga_{2-y-z}AlIn_zS_4):Eu^{2+}$, $(Sr_{1-u-v-x}Mg_uCa_vBa_x)(Ga_{2-y-z}Al_yIn_zS_4):Eu^{2+}$. The phosphor particles may be dispersed in a host material which is selected from, for example, materials including but not limited to epoxies, acrylic polymers, polycarbonates, silicone polymers, optical glasses, and chalcogenide glasses. Alternatively, such phosphors may be deposited on substrate surfaces as phosphor films.

[0083] The examples of phosphors described in U.S. Patent Application Publication No. 2002/0185965 include the phosphor powder mixed with the conventional curable silicone composition is a powder of $(Y,Gd)_3Al_5O_{12}:Ce$ (gadolinium and cerium doped yttrium aluminum garnet) particles available as product number QUMK58/F from Phosphor Technology Ltd., Nazeing, Essex, England. Particles of this phosphor material have a typical diameter of about 5 microns (μm), range from 1 to 10 μm , absorb light of

wavelengths from about 430 nm to about 490 nm, and emit light in a broad band from about 510 nm to about 610 nm. The color of light emitted by an LED having a stenciled phosphor layer is determined, in part, by the concentration of phosphor particles in the luminescent stenciling composition.

[0084] The phosphor particles may be mixed with the curable silicone polymer composition at concentrations ranging from about 20 grams of phosphor particles per 100 grams of silicone polymer composition to about 120 grams of phosphor particles per 100 grams of silicone polymer composition. In some implementations, the titanium dioxide particles may also be used as additives and dispersed in the silicone polymer composition at a concentration of about 1.5 grams of titanium dioxide per 100 grams of silicone polymer composition to about 5.0 grams of titanium dioxide per 100 grams of silicone polymer composition. The titanium dioxide particles, which are approximately the same size as the phosphor particles, increase the scattering of excitation light and thus increase the absorption of that light by the phosphor particles.

[0085] Next, after the phosphor particles and optional titanium dioxide particles are mixed with the curable silicone composition, finely divided silica particles are dispersed in the mixture to form a thixotropic gel. A thixotropic gel exhibits thixotropy, i.e., an apparent drop in viscosity when subjected to shear and a return to the original viscosity level when the shear force is removed. Consequently, a thixotropic gel behaves as a fluid when shaken, stirred, or otherwise disturbed and sets again to a gel when allowed to stand. The silica particles may be, e.g., particles of fumed silica, a colloidal form of silica made by combustion of chlorosilanes in a hydrogen-oxygen furnace. Fumed silica is chemically and physically stable at temperatures exceeding 120° C., transparent

to visible light, and will impart satisfactory thixotropic properties to the luminescent stenciling composition at comparatively low concentrations. The grade of fumed silica used is chosen to be compatible with non-polar materials.

5 **[0086]** In one implementation, the fumed silica is M-5P grade CAB-O-SIL®. untreated amorphous fumed silica obtained from Cabot Corporation of Boston, Mass. This grade of fumed silica is hydrophobic and has an average surface area per unit mass of 200 ± 15 m²/g. The M-5P grade fumed silica particles are dispersed
10 in the mixture of phosphor particles and silicone polymer composition with a conventional three roll mill at concentrations of about 1.5 grams of fumed silica per 100 grams of silicone polymer composition to about 4.5 grams of fumed silica per 100 grams of silicone polymer composition. As the
15 concentration of fumed silica is increased, the stenciling composition becomes more thixotropic, i.e., more solid-like as an undisturbed gel.

[0087] Other implementations use fumed silica having a surface area per unit mass either greater than or less than
20 200 ± 15 m²/g. For fixed concentrations of fumed silica, stenciling compositions become more thixotropic as the surface area per unit mass of the fumed silica is increased. Thus, fumed silicas having lower surface area per unit mass must be used at higher concentrations. The required high concentrations of low surface
25 area per unit mass fumed silicas can result in stenciling compositions having viscosities that are too high to be easily stenciled. Consequently, the fumed silica preferably has a surface area per unit mass greater than about 90 m²/g. In contrast, as the surface area per unit mass of the fumed silica
30 is increased, the required concentration of fumed silica decreases, but the fumed silica becomes more difficult to disperse in the silicone polymer composition.

[0088] The examples of phosphors described in the PCT Patent Application Publication No. WO 01/24229 include host materials and dopant ions. The host material may have an inorganic, ionic lattice structure (a "host lattice") in which the dopant ion replaces a lattice ion. The dopant is capable of emitting light upon absorbing excitation radiation. Suitable dopants strongly absorb excitation radiation and efficiently convert this energy into emitted radiation. As an example, the dopant may be a rare earth ion which absorbs and emits radiation via 4f-4f transitions, i.e. electronic transitions involving f-orbital energy levels. While f-f transitions are quantum-mechanically forbidden, resulting in weak emission intensities, it is known that certain rare earth ions, such as Eu^{2+} or Ce^{3+} , strongly absorb radiation through allowed 4f-5df transitions (via d-orbital/f-orbital mixing) and consequently produce high emission intensities. The emissions of certain dopants can be shifted in energy depending on the host lattice in which the dopant ion resides. Certain rare earth dopants efficiently convert blue light to visible light when incorporated into an appropriate host material.

[0089] In some implementations, the first and second phosphors comprise a host sulfide material, i.e. a lattice which includes sulfide ions. Examples of suitable host sulfide materials include CaS , SrS and thiogallates such as SrGa_2S_4 . A phosphor mixture may be formed by different rare earth ions that are excitable by one common blue energy source of a relatively narrow linewidth to emit light at two different energy ranges (e.g. red and green). As an example for such a phosphor mixture, the dopant is the same in the first and second phosphors with different host materials. The red and green emissions of the two phosphors can be tuned by selecting an appropriate host material. In one embodiment, the green

phosphor is $\text{SrGa}_2\text{S}_4:\text{Eu}$. In another embodiment, the red phosphor is selected from the group consisting of $\text{SrS}:\text{Eu}$ and $\text{CaS}:\text{Eu}$.

[0090] The examples of phosphors described in U.S. Patent Application Publication No. 2004/0263074 include particles which are characterized as being capable of down-conversion, that is, after being stimulated (excitation) by relatively shorter wavelength light, they produce longer wavelength light (emission). The phosphor composition comprises at least one, typically at least two (or three, or four) types of phosphor particles, which each have their own emission characteristics. In an embodiment having at least two different types of phosphor particles, the first type of phosphor particle emits red light upon excitation, and the second type of phosphor particle emits green light upon excitation. For red emission, typical phosphor particles suitable for use in the phosphor composition may comprise a material selected from $\text{SrS}:\text{Eu}^{2+}$; $\text{CaS}:\text{Eu}^{2+}$; $\text{CaS}:\text{Eu}^{2+}, \text{Mn}^{2+}$; $(\text{Zn}, \text{Cd})\text{S}:\text{Ag}^+$; $\text{Mg}_4\text{GeO}_{5.5}\text{F}:\text{Mn}^{4+}$; $\text{Y}_2\text{O}_2\text{S}:\text{Eu}^{2+}$, $\text{ZnS}:\text{Mn}^{2+}$, and other phosphor materials having emission spectra in the red region of the visible spectrum upon excitation. For green emission, typical phosphor particles suitable for use in the phosphor composition may comprise a material selected from $\text{SrGa}_2\text{S}_4:\text{Eu}^{2+}$; $\text{ZnS}:\text{Cu}, \text{Al}$ and other phosphor materials having emission spectra in the green region of the visible spectrum upon excitation.

[0091] In some implementations, blue emitting phosphor particles may be included in the phosphor composition in addition to the red- and green-emitting phosphors; suitable blue emitting phosphor particles may comprise, e.g. $\text{BaMg}_2\text{Al}_{16}\text{O}_{27}:\text{Eu}^{2+}, \text{Mg}$ or other phosphor materials having emission spectra in the blue region of the visible spectrum upon excitation. In other implementations, the phosphor composition may comprise a type of phosphor particles that is selected to produce yellow light upon

excitation. For yellow emission, phosphor particles suitable for use in the phosphor composition may include a material selected from $(Y,Gd)_3Al_5O_{12}:Ce,Pr$ and other phosphor materials having emission spectra in the yellow region of the visible spectrum upon excitation.

[0092] Some suitable red-emitting phosphor particles may have a peak emission wavelength in the range of about 590 nm to about 650 nm. In particular embodiments, the phosphor particles have a peak emission wavelength in the range of about 620 nm to about 650 nm, typically in the range of about 625 nm to about 645 nm, more typically in the range of about 630 nm to about 640 nm. In other embodiments, the phosphor particles have a peak emission wavelength in the range of about 590 nm to about 625 nm, typically in the range of about 600 nm to about 620 nm. In yet other embodiments, the phosphor particles may emit light having a wavelength in the range of about 600 nm to about 650 nm, typically in the range of about 610 nm to about 640 nm, more typically in the range of about 610 nm to about 630 nm.

[0093] Some suitable green-emitting phosphor particles may have a peak emission wavelength in the range of about 520 nm to about 550 nm. In particular embodiments, the phosphor particles have a peak emission wavelength in the range of about 530 nm to about 550 nm, typically in the range of about 535 nm to about 545 nm. In other embodiments, the phosphor particles have a peak emission wavelength in the range of about 520 nm to about 535 nm. In yet other embodiments, the phosphor particles emit light having a wavelength in the range of about 520 nm to about 550 nm, typically in the range of about 535 nm to about 550 nm, or in the range of about 520 nm to about 535 nm.

[0094] Some suitable blue-emitting phosphor particles typically have a peak emission wavelength in the range of about 440 nm to about 490 nm. In particular embodiments, the phosphor

particles have a peak emission wavelength in the range of about 450 nm to about 470 nm, typically in the range of about 455 nm to about 465 nm. In other embodiments, the phosphor particles have a peak emission wavelength in the range of about 440 nm to about 450 nm, typically in the range of about 435 nm to about 445 nm. In yet other embodiments, the phosphor particles emit light having a wavelength in the range of about 440 nm to about 480 nm, typically in the range of about 450 nm to about 470 nm.

[0095] Some suitable yellow-emitting phosphor particles typically have a peak emission wavelength in the range of about 560 nm to about 580 nm. In particular embodiments, the phosphor particles have a peak emission wavelength in the range of about 565 nm to about 575 nm. In other embodiments, the phosphor particles have a peak emission wavelength in the range of about 575 nm to about 585 nm. In yet other embodiments, the phosphor particles emit light having a wavelength in the range of about 560 nm to about 580 nm, typically in the range of about 565 nm to about 575 nm.

[0096] The exact wavelength range for each of the above described type of phosphor particles may be determined by selection from available sources of phosphors, desired color attributes of the light emitting device (e.g. the 'correlated color temperature' of the emitted white light), choice of the excitation light such as the excitation wavelength, and the like. Useful phosphor materials and other information may be found in Mueller-Mach et al., "High Power Phosphor-Converted Light Emitting Diodes Based on III-Nitrides", IEEE J. Sel. Top. Quant. Elec. 8(2):339 (2002).

[0097] The examples of phosphors described in the published PCT Application No. PCT/US99/28279 include $\text{Ba}_2\text{MgSi}_2\text{O}_7:\text{Eu}^{2+}$; $\text{Ba}_2\text{SiO}_4:\text{Eu}^{2+}$; and $(\text{Sr},\text{Ca},\text{Ba})(\text{Al},\text{Ga})_2\text{S}_4:\text{Eu}^{2+}$, where the element following the colon represents an activator. The notation

(A,B,C) signifies (A_x, B_y, C_z) where $0 \leq x \leq 1$ and $0 \leq y \leq 1$ and $0 \leq z \leq 1$ and $x+y+z=1$. For example, (Sr,Ca,Ba) signifies (Sr_x, Ca_y, Ba_z) where $0 \leq x \leq 1$ and $0 \leq y \leq 1$ and $0 \leq z \leq 1$ and $x+y+z=1$. Typically, x, y, and z are all nonzero. The notation (A,B) signifies (A_x, B_y) where $0 \leq x \leq 1$ and $0 \leq y \leq 1$ $x+y=1$. Typically, x and y are both nonzero. Examples of green emitting phosphors may have peak emissions between about 500 nm and about 555 nm. For example, $Ba_2MgSi_2O_7:Eu^{2+}$ has a peak emission at about 495-505 nm, typically about 500 nm, $Ba_2SiO_4:Eu^{2+}$ has a peak emission at about 500-510 nm, typically about 505 nm, and $(Sr,Ca,Ba)(Al,Ga)_2S_4:Eu^{2+}$ has a peak emission at about 535-545 nm, typically about 540 nm.

[0098] The examples of phosphors described in U.S. Patent Application Publication No. 2001/0050371 include fluorescent materials that include a CaS phosphor activated by Eu, phosphors represented by $AEu_{(1-x)}Ln_xB_2O_8$ where A is an element selected from the group consisting of Li, K, Na and Ag; Ln is an element selected from the group consisting of Y, La and Gd; and B is W or Mo; and x is number equal to or larger than 0, but smaller than 1. A CaS phosphor activated by Eu or a phosphor of $AEu_{(1-x)}Ln_xB_2O_8$ may be mixed with a base polymer to form a transparent resin.

[0099] As an example, a red phosphor that emits red light may be CaS activated by Eu or a compound expressed by a general formula $AEu_{(1-x)}Ln_xB_2O_8$. CaS activated by Eu is excited by light of 420 to 600 nm and emits light of 570 to 690 nm which peaks at 630 nm. $AEu_{(1-x)}Ln_xB_2O_8$ is a phosphor which emits light near 614 nm by transition of Eu^{3+} ions. Although an excitation wavelength and an emission wavelength differ depending on the kinds of elements A and B of the phosphor, the red phosphors can be excited by light near 470 nm (blue) and or 540 nm (green) and can emit light near 620 nm (red). When x is zero, the phosphor $AEuB_2O_8$ is formed and exhibits the highest emission intensity

near 615 nm (red). $\text{AEu}_{(1-x)}\text{Ln}_x\text{B}_2\text{O}_8$ (A=Li, K, Na, Ag; Ln=Y, La, Gd; B=W, Mo) may be obtained by mixing oxides, carbonate and the like of elements which constitute the phosphor at a desired stoichiometric ratio. In addition to the above red phosphors, a yttrium aluminate phosphor (so-called YAG) can be a stable oxide having a garnet structure in which Y-atoms of $\text{Y}_3\text{Al}_5\text{O}_{12}$ are substituted by Gd at part of their positions, particularly a phosphor which is excited by blue light (400 to 530 nm) to emit light of yellow to green region centering 550 nm. Activating elements to be added to the yttrium aluminate phosphor include, for example, cerium, europium, manganese, samarium, terbium, tin, chromium, etc. For example, $\text{Y}_x\text{Gd}_{3-x}\text{Al}_5\text{O}_{12}$ activated by Ce may be used. In implementations, one, two or more kinds of such YAG phosphors may be mixed together to form a desired phosphor material.

[00100] The examples of phosphors described in U.S. Patent No. 6,252,254 include $\text{YBO}_3:\text{Ce}^{3+}, \text{Tb}^{3+}$; $\text{BaMgAl}_{10}\text{O}_{17}:\text{Eu}^{2+}, \text{Mn}^{2+}$; $(\text{Sr}, \text{Ca}, \text{Ba})(\text{Al}, \text{Ga})_2\text{S}_4:\text{Eu}^{2+}$; and $\text{Y}_3\text{Al}_5\text{O}_{12}:\text{Ce}^{3+}$; and at least one of: $\text{Y}_2\text{O}_2\text{S}:\text{Eu}^{3+}, \text{Bi}^{3+}$; $\text{YVO}_4:\text{Eu}^{3+}, \text{Bi}^{3+}$; $\text{SrS}:\text{Eu}^{2+}$; $\text{SrY}_2\text{S}_4:\text{Eu}^{2+}$; $\text{SrS}:\text{Eu}^{2+}, \text{Ce}^{3+}, \text{K}^+$; $(\text{Ca}, \text{Sr})\text{S}:\text{Eu}^{2+}$; and $\text{CaLa}_2\text{S}_4:\text{Ce}^{3+}$, where the element following the colon represents an activator. As an example, the $\text{SrS}:\text{Eu}^{2+}, \text{Ce}^{3+}, \text{K}^+$ phosphor, when excited by blue light, emits a broadband spectrum including red light and green light. These phosphor compositions can be used to produce white light with pleasing characteristics, such as a color temperature of 3000-4100° K, a color rendering index of greater than 70, typically greater than 80, for example about 83-87, and a device luminous efficacy of about 10-20 lumens per watt of input electric power when blue LED is used as the excitation source.

[00101] The examples of phosphors described in U.S. Patent Application Publication No. 2002/0003233 include a single crystal Cerium-doped Yttrium-Aluminum-Garnet ($\text{Y}_3\text{Al}_5\text{O}_{12}:\text{Ce}^{3+}$)

compound as a yellowish-light-emitting phosphor. Yttrium-Aluminum-Oxides which do not have garnet structures, such as monoklinic $YAlO$ and $YAlO$ -perovskite, may also be used as the host materials for the phosphors. Several lanthanides (Ln) may partly replace the Yttrium, such as in $(Y,Ln)AlO$, $(Y,Ln)(Al,Ga)O$. The lanthanide may be, for example Lutetium (Lu). These host materials may be doped with single dopants such as Cerium (Ce), Praseodymium (Pr), Holmium (Ho), Ytterbium (Yb), and Europium (Eu), or with double dopants such as (Ce,Pr), (Ce, Ho), and (Eu,Pr) to form various phosphors. $Y_3Al_5O_{12}:Ho^{3+}$, and $Y_3Al_5O_{12}:Pr^{3+}$ are examples of single crystal phosphor materials. In one embodiment, a phosphor listed above emits yellowish light by absorbing either bluish light or ultraviolet light having a wavelength that is shorter than or equal to about 460 nm. In one example, a YAG substrate doped with 4 mol % Cerium (Ce^{3+}) can absorb light having a wavelength of about 410-460 nm and emit yellowish light having a peak wavelength of about 550-570 μm . any. Part of the Yttrium in YAG may be substituted by a lanthanide element such as Gadolinium (Gd). For example, a phosphor may be $(Y_{0.75}Gd_{0.25})AG:Ce$.

[00102] The examples of phosphors described in European Patent Application No. 1,150,361 include a resin comprising a phosphor selected from the phosphor family chemically identified as $(Sr,Ca,Ba)S:Eu^{2+}$. One phosphor selected from this family is strontium sulfide doped with europium, which is chemically defined as $SrS:Eu^{2+}$ and has a peak emission at 610 nm. Rather than using phosphor-converting resins, dyes or epoxies, other types of phosphor converting elements may also be used, including phosphor-converting thin films, phosphor-converting substrates, or various combinations of these elements.

[00103] The examples of phosphors described in U.S. Patent Application Publication No. 2002/0145685 include a red phosphor

SrS:Eu²⁺ and a green phosphor SrGa₂S₄:Eu²⁺. These phosphors are excitable by the 460 nm blue light.

[00104] The examples of phosphors described in U.S. Patent Application Publication No. 2005/0001225 include rare-earth element doped oxide nitride phosphor or cerium ion doped lanthanum silicon nitride phosphor. A rare-earth element doped oxide nitride in the following examples is a crystalline material, not including a glass material such as oxynitride glass. However, it may include a small amount of glass phase (e.g., less than 5%). A cerium ion doped lanthanum silicon nitride in the following examples is a crystalline material, not including a glass material.

[00105] One example of a first phosphor is single-phase α -sialon phosphor that is represented by: Me_xSi_{12-(m+n)}Al_(m+n)OnN_{16-n}:Rel_yRe_{2z}. Part or all of metal (Me) (Me is one or more of Li, Ca, Mg, Y and lanthanide metals except for La and Ce) dissolved into the α -sialon is replaced by lanthanide metal (Rel) (Rel is one or more of Ce, Pr, Eu, Tb, Yb and Er) as luminescence center or lanthanide metal (Rel) and lanthanide metal (Re2) (Re2 is Dy) co-activator. In this case, Me may be one or more of Ca, Y and lanthanide metals except for La and Ce. In some implementations, Me may be Ca or Nd. The lanthanide metal (Rel) used for replacing may be Ce, Eu or Yb. In case of using two kinds of metals for replacing, for example, a combination of Eu and Er may be used. In case of using three kinds of metals for replacing, for example, a combination of Eu, Er and Yb may be used.

[00106] Also, the metal (Me) may be replaced by lanthanide metal Rel and lanthanide metal Re2 as co-activator. The lanthanide metal Re2 is dysprosium (Dy). In this case, the lanthanide metal Rel may be Eu. Meanwhile, if part or all of metal (Me) replaced by one or more of Ce, Pr, Eu, Tb, Yb and Er

(lanthanide metal (Re1)), or one or more of Ce, Pr, Eu, Tb, Yb and Er (lanthanide metal (Me) (Re1)) and Dy (lanthanide metal (Re2)), then the metal is not necessarily added and may be replaced by another metal.

5 **[00107]** A-sialon (α -sialon) has a higher nitrogen content than oxynitride glass and is represented by: $N_xSi_{12-(m-n)}Al_{(m+n-)}O_nN_{16-n}$ where x is a value obtained dividing (m) by a valence of metal (M). Meanwhile, oxynitride glass is as described in prior art 3, such a phosphor that serves to shift the position of
 10 excitation/emission peak of conventional oxide system phosphors to the longer wavelength side by replacing oxygen atom surrounding the rare-metal element as luminescence center by nitrogen atom to relax the influence of surrounding atoms to electron of rare-metal element, and that has an excitation
 15 spectrum extending until visible region ($\leq 500\mu m$).

[00108] Also, in the single-phase α -sialon phosphor, the metal (Me) is dissolved in the range of, at the minimum, one per three unit cells of α -sialon including four mass weights of (Si, Al)₃(N,O)₄ to, at the maximum, one per one unit cell thereof. The
 20 solid solubility limit is generally, in case of bivalent metal (Me), $0.6 < m < 3.0$ and $0 \leq n < 1.5$ in the above formula and, in case of trivalent metal (Me), $0.9 < m < 4.5$ and $0 \leq n < 1.5$. It is estimated that, in a region except for those regions, single-phase α -sialon phosphor is not obtained.

25 **[00109]** The interionic distance of lanthanide metal Re1 as luminescence center to replace part or all of metal (Me) and to serve as activator is about 5 angstroms at the minimum. It is significantly greater than 3 to 4 angstroms in phosphor known thus far. Therefore, it can prevent a significant reduction in
 30 emission intensity due to concentration quenching generated when

a high concentration of lanthanide metal as luminescence center is included in matrix material.

[00110] Further in the single-phase α -sialon phosphor, the metal (Me) is replaced by lanthanide metal (Re2) as α -activator as well as lanthanide metal (Re1) as luminescence center. It is assumed that lanthanide metal (Re2) has two co-activation effects. One is sensitizer function and the other is to newly generate a carrier trap level to develop or improve the long persistence or to improve the thermal luminescence. Since the lanthanide metal Re2 is co-activator, it is suitable that the replacement amount thereof is generally $0.0 \leq z < 0.1$ in the earlier formula.

[00111] The single-phase α -sialon phosphor has α -sialon as a matrix material, and is essentially different in composition and crystal structure from a phosphor having β -sialon as matrix material.

[00112] Namely, β -sialon is represented by: $\text{Si}_{6-z}\text{Al}_z\text{O}_z\text{N}_{8-z}$ ($0 < z < 0.2$), and it is solid solution of β -type silicon nitride where part of Si sites is replaced by Al and part of N sites is replaced by O. In contrast, α -sialon is represented by: $\text{Me}_x\text{Si}_{12-(m+n)}\text{Al}_{(m+n)}\text{O}_n\text{N}_{16-n}$, and it is a solid solution of α -type silicon nitride, where part of Si--N bonds is replaced by Al--N bond and a specific metal (Me) (Me is one or more of Li, Ca, Mg, Y and lanthanide metals except for La and Ce) invades between lattices and is dissolved therein. Thus, both are different in state of solid solution and, therefore, the β -sialon has a high oxygen content and the α -sialon has a high nitrogen content. So, if a phosphor is synthesized using β -sialon as matrix material and adding one or more of rare-earth oxides of Ce, Pr, Eu, Tb, Yb and Er as luminescence center, it becomes a mixed material that

has a compound including a rare-earth metal between β -sialon particles since the β -sialon does not dissolve metal.

[00113] In contrast, if α -sialon is used as matrix material, the metal (Me) (Me is one or more of Li, Ca, Mg, Y and
5 lanthanide metals except for La and Ce) is taken and dissolved in the crystal structure and the metal (Me) is replaced by rare-earth metal, Ce, Pr, Eu, Tb, Yb and Er as luminescence center. Therefore, the oxide nitride phosphor composed of single-phase α -sialon structure can be obtained.

10 [00114] Accordingly, the composition and crystal structure of phosphor drastically changes by whether to use β -sialon or α -sialon as matrix material. This is reflected in emission characteristics of phosphor.

[00115] In case of using β -sialon as matrix material, for
15 example, a phosphor that is synthesized adding Er oxide to β -sialon radiates a blue luminescent light (410-440 nm). In α -sialon, as described later, rare-earth element doped oxide nitride phosphor radiates orange to red light (570-590 nm) due to the activation of Er. Viewing from this phenomenon it is
20 assumed that Er is taken in the crystal structure of α -sialon and, thereby, Er is influenced by nitrogen atom composing the crystal and, therefore, the elongation of light source wavelength, which is very difficult to realize in phosphor with oxide as matrix material, can be easily generated.

25 [00116] In case of using α -sialon as matrix material, the rare-earth element doped oxide nitride phosphor also has the advantages of matrix material, α -sialon. Namely, α -sialon has excellent thermal and mechanical properties and can prevent the thermal relaxation phenomenon that causes a loss in excitation
30 energy. Therefore, in the rare-earth element doped oxide nitride phosphor, a ratio of reduction in emission intensity according

to rise of temperature becomes small. Thus, the temperature range available can be broadened as compared to the conventional phosphor.

[00117] Furthermore, α -sialon has an excellent chemical stability. Therefore, the phosphor has an excellent heat resistance. The rare-earth element doped oxide nitride phosphor can be excited by ultraviolet rays to X-rays further electron beam, according to O/N ratio in its composition, selection of lanthanide metal Re1 to replace metal (Me), and existence of lanthanide metal Re2 as α -activator.

[00118] Especially, of rare-earth element doped oxide nitride phosphor, in $\text{Me}_x\text{Si}_{9.75}\text{Al}_{2.25}\text{O}_{0.75}\text{N}_{15.25}:\text{Re}_y\text{Re}_z$ ($m=1.5$, $n=0.75$), one that satisfies $0.3 < x+y < 0.75$ and $0.01 < y+z < 0.7$ (where $y > 0.01$, $0.0 \leq z < 0.1$) or $0.3 < x+y+z < 1.5$, $0.01 < y < 0.7$ and $0.0 \leq z < 0.1$, and metal (Me) is Ca offers an excellent emission characteristic and can have great potential in applications not only as ultraviolet-visible light excitation phosphor but also as electron beam excitation phosphor.

[00119] Different from the above first phosphor, an example of a second phosphor is a rare-earth element doped oxide nitride phosphor that contains α -sialon as main component (hereinafter referred to as mixture α -sialon phosphor). This second phosphor includes α -sialon, which dissolves a rare-earth element allowing an increase in brightness of a white LED using blue LED chip as light source, β -sialon, and unreacted silicon nitride. As the result of researching a composition with high emission efficiency, a mixture material with a property equal to single-phase α -sialon phosphor is found that is composed of α -sialon that part of Ca site in α -sialon stabilized by Ca is replaced by one or more of rare-earth metal (M) (where M is Ce, Pr, Eu, Tb, Yb or Er), β -sialon and unreacted silicon nitride. In some

implementations, M is preferably Ce, Eu or Yb and further preferably Ce or Eu.

[00120] The mixture α -sialon phosphor can be produced adding less rare-earth element than the single-phase α -sialon phosphor.

5 Thus, the material cost can be reduced. Further, since the mixture α -sialon phosphor also has α -sialon as matrix material like the single-phase α -sialon phosphor, it can have the advantages of matrix material α -sialon, i.e. good chemical, mechanical and thermal properties. Thus, it offers a stable and
10 long-lifetime phosphor material. Due to these properties, it can suppress thermal relaxation phenomenon causing a loss in excitation energy. Therefore, in α -sialon with dissolved rare-earth element as well as Ca in this embodiment, a ratio of reduction in emission intensity according to rise of temperature
15 becomes small. Thus, the temperature range available can be broadened as compared to the conventional phosphor.

[00121] Furthermore, the mixture α -sialon phosphor can be excited by ultraviolet rays to X-rays further electron beam, according to O/N ratio in its composition and selection of metal
20 (M).

[00122] The mixture α -sialon phosphor offers a material that has an emission property equal to the single-phase α -sialon phosphor even when reducing the amount of rare-earth metal added. In order to stabilize the α -sialon structure, it is
25 necessary to dissolve more than a certain amount of element. When amounts of Ca and trivalent metal dissolved are given x and y, respectively, a value of (x+y) is needed to be greater than 0.3 in thermodynamic equilibrium.

[00123] The mixture α -sialon phosphor includes an organ with β -
30 sialon and unreacted silicon nitride remained other than single-

phase α -sialon phosphor because of less addition amount and not reaching the thermodynamic equilibrium.

[00124] The amount of added metal in the mixture α -sialon

phosphor is in the range of $0.05 < (x+y) < 0.3$, $0.02 < x < 0.27$ and

5 $0.03 < y < 0.3$ in chemical composition of powder. If the amount of added metal is less than the lower limit, the amount of α -sialon lowers and the emission intensity lowers. If the amount of added metal is greater than the upper limit, only α -sialon remains.

Therefore, the object of high brightness can be completed. In

10 the range defined above, the mixture α -sialon phosphor can be obtained that is composed of: α -sialon of 40 weight % or more and 90 weight % or less; β -sialon of 5 weight % or more and 40 weight % or less; and unreacted silicon nitride of 5 weight % or more and 30 weight % or less. The reason why the emission intensity
15 is high even with the unreacted silicon nitride included is that α -sialon epitaxially grows on unreacted silicon nitride and its surface portion mainly responds to excitation light to offer an emission property substantially equal to only α -sialon.

[00125] The range may be $0.15 < (x+y) < 0.3$, $0.10 < x < 0.25$ and

20 $0.05 < y < 0.15$. In this range, the mixture α -sialon phosphor can be obtained that is composed of: α -sialon of 50 weight % or more and 90 weight % or less; β -sialon of 5 weight % or more and 30 weight % or less; and unreacted silicon nitride of 5 weight % or more and 20 weight % or less.

25 **[00126]** The mixture α -sialon phosphor can be obtained by, e.g., heating $\text{Si}_3\text{N}_4\text{--M}_2\text{O}_3\text{--CaO--AlN--Al}_2\text{O}_3$ system mixed powder at 1650 to 1900° C. in inert gas atmosphere to get a sintered body, then powdering it. Since CaO is so instable that it easily reacts with moisture vapor in the air, it is generally obtained by
30 adding in the form of calcium carbonate or calcium hydroxide,

then making it CaO in the process of heating at high temperature.

[00127] The chemical composition of mixture α -sialon phosphor can be defined using the composition range of M- α -sialon, Ca- α -sialon and β -sialon. Namely, in the range of three composition lines of $\text{Si}_3\text{N}_4\text{-a}(\text{M}_2\text{O}_3.9\text{AlN})$, $\text{Si}_3\text{N}_4\text{-b}(\text{CaO}.3\text{AlN})$ and $\text{Si}_3\text{N}_4\text{-c}(\text{AlN}. \text{Al}_2\text{O}_3)$, it is defined $4 \times 10^{-3} < a < 4 \times 10^{-2}$, $8 \times 10^{-3} < b < 8 \times 10^{-2}$ and $10^{-2} < c < 8 \times 10^{-1}$.

[00128] An example of a third phosphor is a cerium ion doped lanthanum silicon nitride phosphor: $\text{La}_{1-x}\text{Si}_3\text{N}_5:\text{xCe}$ (doping amount x is $0 < x < 1$), where lanthanum site is replaced in solid dissolution by cerium ion activator. If the doping amount is $0.1 < x < 0.5$, it is ultraviolet light excitation phosphor and, if the doping amount is $0.0 < x < 0.2$, it is electron beam excitation phosphor.

[00129] Lanthanum silicon nitride (LaSi_3N_5) has an excellent thermal stability and serves to suppress the thermal relaxation phenomenon in the process of phosphor emission. Therefore, a loss in excitation energy can be reduced and a ratio of reduction in emission intensity according to rise of temperature becomes small. Thus, in the cerium ion doped lanthanum silicon nitride phosphor, the temperature range available can be broadened as compared to the conventional phosphor. Also, the lanthanum silicon nitride (LaSi_3N_5) has excellent chemical stability and is light resistance.

[00130] The cerium ion doped lanthanum silicon nitride phosphor satisfies a blue chromaticity value and has excellent thermal stability, mechanical property and chemical stability. Therefore, it can have great potential in applications for fluorescent character display tube (VFD), field emission display (FED) etc. that may be used in severe environment.

[00131] The examples of phosphors described in U.S. Patent No. 5,998,925 include a garnet fluorescent material comprising 1) at least one element selected from the group consisting of Y, Lu, Sc, La, Gd and Sm, and 2) at least one element selected from the group consisting of Al, Ga and In, and being activated with cerium. $\text{Y}_3\text{Al}_5\text{O}_{12}:\text{Ce}$ and $\text{Gd}_3\text{In}_5\text{O}_{12}:\text{Ce}$ are two examples. The presence of Y and Al enables a phosphor to increase the luminance. For example, in a yttrium-aluminum-garnet fluorescent material, part of Al may be substituted by Ga so that the proportion of Ga:Al is within the range from 1:1 to 4:6 and part of Y is substituted by Gd so that the proportion of Y:Gd is within the range from 4:1 to 2:3.

[00132] Other examples of phosphor include $(\text{Re}_{1-r}\text{Sm}_r)_3(\text{Al}_{1-s}\text{Ga}_s)_5\text{O}_{12}:\text{Ce}$, where $0 \leq r < 1$ and $0 \leq s \leq 1$ and Re is at least one selected from Y and Gd, $(\text{Y}_{1-p-q-r}\text{Gd}_p\text{Ce}_q\text{Sm}_r)_3(\text{Al}_{1-s}\text{Ga}_s)_5\text{O}_{12}$ as the phosphor, where $0 \leq p \leq 0.8$, $0.0003 \leq q \leq 0.2$, $0.0003 \leq r \leq 0.08$ and $0 \leq s \leq 1$. In some implementations, a phosphor may include two or more yttrium-aluminum-garnet fluorescent materials, activated with cerium, of different compositions including Y and Al to control the emission spectrum of the phosphor. In other implementations, a phosphor may include a first fluorescent material represented by general formula $\text{Y}_3(\text{Al}_{1-s}\text{Ga}_s)_5\text{O}_{12}:\text{Ce}$ and a second fluorescent material represented by the formula $\text{Re}_3\text{Al}_5\text{O}_{12}:\text{Ce}$, where $0 \leq s \leq 1$ and Re is at least one selected from Y, Ga and La. In addition, two or more fluorescent materials of different compositions represented by a general formula $(\text{Re}_{1-r}\text{Sm}_r)_3(\text{Al}_{1-s}\text{Ga}_s)_5\text{O}_{12}:\text{Ce}$, where $0 \leq r < 1$ and $0 \leq s \leq 1$ and Re is at least one selected from Y and Gd may be used as the phosphor in order to control the emitted light to a desired wavelength.

[00133] The examples of phosphors described in U.S. Patent No. 6,765,237 include phosphors that absorb UV light from about 380 to about 420 nm and emit visible light of different colors. For

example, a phosphor blend may include a first phosphor comprising $\text{BaMg}_2\text{Al}_{16}\text{O}_{27}:\text{Eu}^{2+}$ (BAM) and a second phosphor comprising $(\text{Tb}_{.1-x-y}\text{A}_x\text{RE}_y)_3\text{D}_z\text{O}_{12}$ (TAG), where A is a member selected from the group consisting of Y, La, Gd, and Sm; RE is a member selected from the group consisting of Ce, Pr, Nd, Sm, Eu, Gd, Dy, Ho, Er, Tm, Yb, and Lu; D is a member selected from the group consisting of Al, Ga, and In; x is in the range from 0 to about 0.5, y is in the range from about 0 to about 0.2, and z is in the range from about 4 to about 5. As another example, a phosphor blend may include a first phosphor comprising $\text{Tb}_3\text{Al}_{4.9}\text{O}_{12}:\text{Ce}$ and a second phosphor selected from the group consisting of $\text{BaMg}_2\text{Al}_{16}\text{O}_{27}:\text{Eu}^{2+}$ (BAM) and $(\text{Sr},\text{Ba},\text{Ca},\text{Mg})_5(\text{PO}_4)_3\text{Cl}:\text{Eu}^{2+}$

[00134] The phosphors described in U.S. Patent Application Publication No. 2004/0227465 include various phosphor

compositions as follows:

[00135] 1. A rare earth element activated complex halide phosphor represented by the formula: $\text{BaF}_2.a\text{BaX}_2.b\text{MgF}_2.c\text{BeF}_2.d\text{Me}^{\text{II}}\text{F}_2.e\text{Ln}$, where X is at least one halogen selected from the group consisting of chlorine, bromine and iodine; Me^{II} is at least one divalent metal selected from the group consisting of: calcium and strontium; Ln is at least one rare earth element selected from the group consisting of: divalent europium (Eu^{2+}), cerium (Ce^{3+}) and terbium (Tb^{3+}), and a is in the range between 0.90 and 1.05, b is in the range of 0 to 1.2; c is in the range of between 0 and 1.2, and d is defined by the sum of c+d being in the range of between 0 and 1.2, and BeF_2 is present in an amount sufficient to effect a phosphor exhibiting a higher luminance than said phosphor absent BeF_2 when stimulated by light of a wavelength ranging from 450 to 800 nm after exposure to X-rays. See U.S. Pat. No. 4,512,911 for additional details.

[00136] 2. A cerium activated rare earth halophosphate phosphor having the formula: $\text{LnPO}_4 \cdot a\text{LnX}_3 : x\text{Ce}^{3+}$ in which Ln is at least one rare earth element selected from the group consisting of Y, La, Gd and Lu; X is at least one halogen selected from the group consisting of F, Cl, Br and I; and a and x are numbers satisfying the conditions of $0.1 < a < 10.0$ and $0 < x < 0.2$, respectively and exhibiting a higher stimulated emission upon excitation with a He-Ne laser of a wavelength 632.8 nm after exposure to X-rays at 80 KVp, than the phosphor wherein a is less than 0.1. See U.S. Pat. No. 4,661,419 for additional details.

[00137] 3. A mixed single-phase strontium and lanthanide oxide with a magnetolead type crystalline structure having the formula (I): $\text{Sr}_x\text{Ln}_{1y_1}\text{Ln}_{2y_2}\text{Ln}_{3y_3}\text{M}_z\text{A}_a\text{B}_b\text{O}_{19-k(I)}$ in which Ln1 represents at least one trivalent element selected from lanthanum, gadolinium and yttrium; Ln2 represents at least one trivalent element selected from neodymium, praseodymium, erbium, holmium and thulium; Ln3 represents an element selected from bivalent europium or trivalent cerium with retention of electric neutrality by virtue of oxygen holes; M represents at least one bivalent metal selected from magnesium, manganese, and zinc; A represents at least one trivalent metal selected from aluminum and gallium; B represents at least one trivalent transition metal selected from chromium and titanium; x, y1, y2, y3, z, a, b and k represent numbers so that $0 < x < 1$, $0 < y_1 < 1$, $0 < y_2 < 1$, $0 < y_3 < 1$, $0 < z < 1$, $10.5 < a < 12$, $0 < b < 0.5$ and $0 < k < 1$ provided that $0 < x + y_1 + y_2 + y_3 < 1$ and that $11 < z + a + b < 12$. See U.S. Pat. No. 5,140,604 for additional details.

[00138] 4. A divalent europium activated alkaline earth metal halide phosphor having the formula: $\text{M}^{\text{II}}\text{X}_2 \cdot a\text{M}^{\text{II}}\text{X}'_2 \cdot b\text{SiO} : x\text{Eu}^{2+}$ in which M^{II} is at least one alkaline earth metal selected from the group consisting of Ba, Sr and Ca; each of X and X' is at least

one halogen selected from the group consisting of Cl, Br and I, and X is not the same as X'; a and x are numbers satisfying the conditions of $0.1 < a < 10.0$ and $0 < x < 0.2$, respectively; and b is a number satisfying the condition of $0 < b < 3 \times 10^{-2}$. See U.S. Pat.

5 No. 5,198,679 for additional details.

[00139] 5. A bright, short wavelength blue-violet phosphor for electro luminescent displays comprising an alkaline-based halide as a host material and a rare earth as a dopant. See U.S. Pat. No. 5,602,445. The host alkaline chloride can be chosen from
10 the group II alkaline elements, particularly SrCl_2 or CaCl_2 , which, with a europium or cerium rare earth dopant, electroluminesces at a peak wavelength of 404 and 367 nanometers respectively. The resulting emissions have CIE chromaticity coordinates which lie at the boundary of the visible range for
15 the human eye thereby allowing a greater range of colors for full color flat panel electroluminescent displays.

[00140] 6. An inorganic thin film electroluminescent device, comprising an inorganic light emission layer, a pair of electrodes and a pair of insulating layers, at least one of the
20 electrodes being optically transparent, the light emission layer being positioned between the pair of insulating layers, each insulating layer being formed on an opposite side of the light emission layer, the pair of insulating layers being positioned between a light emission layer and the pair of electrodes, the
25 light emission layer consisting essentially of inorganic material comprising a matrix of lanthanum fluoride doped with at least one member selected from the group consisting of: rare earth element metals and compounds thereof. See U.S. Pat. No. 5,648,181 for additional details.

30 **[00141]** 7. A radiographic phosphor screen comprising a support and, coated on the support, at least one layer forming a luminescent portion and an overcoat layer, the luminescent

portion and overcoat layer including a binder that is transparent to X-radiation and emitted light and said luminescent portion including phosphor particles in a weight ratio of phosphor particles to binder of 7:1 to 25:1. The phosphor comprises oxygen and a combination of species characterized by the relationship: $(\text{Ba}_{1-q}\text{M}_q)(\text{Hf}_{1-z-e}\text{Zr}_z\text{Mg}_e): \text{yT}$ wherein M is selected from the group consisting of Ca and Sr and combinations thereof; T is Cu; q is from 0 to 0.15; z is from 0 to 1; e is from 0 to 0.10; z+e is from 0 to 1; and y is from 1×10^{-6} to 0.02. See U.S. Pat. No. 5,698,857 for additional details.

[00142] 8. A garnet fluorescent material comprising: 1) at least one element selected from the group consisting of Y, Lu, Se, La, Gd and Sm; and 2) at least one element selected from the group consisting of Al, Ga and In, and being activated with cerium. One example is cerium-doped yttrium aluminum garnet $\text{Y}_3\text{Al}_5\text{O}_{12}:\text{Ce}$ (YAG:Ce) and its derivative phosphors. See U.S. Pat. No. 5,998,925 for additional details.

[00143] 9. A wavelength-converting casting composition, for converting a wavelength of ultraviolet, blue or green light emitted by an electroluminescent component, comprising: a) a transparent epoxy casting resin; b) an inorganic luminous substance pigment powder dispersed in the transparent epoxy resin, the pigment powder comprising luminous substance pigments from a phosphorus group having the general formula: $\text{A}_3\text{B}_5\text{X}_{12}:\text{M}$, where A is an element selected from the group consisting of Y, Ca, Sr; B is an element selected from the group consisting of Al, Ga, Si; X is an element selected from the group consisting of O and S; and M is an element selected from the group consisting of Ce and Tb. The luminous substance pigments have grain sizes $<20 \mu\text{m}$ and a mean grain diameter $d_{50} < 5 \mu\text{m}$. See U.S. Pat. No. 6,066,861 for additional details.

[00144] 10. Phosphors $\text{Ba}_2(\text{Mg}, \text{Zn})\text{Si}_2\text{O}_7:\text{Eu}^{2+}$ and $(\text{Ba}_{1-x-y-z}, \text{Ca}_x, \text{Sr}_y, \text{Eu}_z)_2(\text{Mg}_{1-w}, \text{Zn}_w)\text{Si}_2\text{O}_7$, where $X+Y+Z = 1$; $Z > 0$; and $0.05 < W < 0.50$ in some implementations. In other implementations, $X+Y+Z = 1$; $0.01 \leq Z \leq 0.1$; and $0.1 \leq W < 0.50$. X and Y can be zero or a non-zero number. Examples of UV-excitable phosphors for emitting green, red, and blue colors are $\text{Ca}_8\text{Mg}(\text{SiO}_4)_4\text{Cl}_2:\text{Eu}^{2+}$, Mn^{2+} ; $\text{Y}_2\text{O}_3:\text{Eu}^{3+}$, Bi^{3+} ; and $\text{Ba}_2(\text{Sr}, \text{Ba}, \text{Ca})_5(\text{PO}_4)_3\text{Cl}:\text{Eu}^{2+}$ (or $\text{BaMg}_2\text{Al}_{16}\text{O}_{27}:\text{Eu}^{2+}$); respectively. See U.S. Pat. No. 6,255,670 for additional details.

[00145] The U.S. Patent Application Publication No. 2004/0227465 also discloses phosphors represented by $\text{Sr}_x\text{Ba}_y\text{Ca}_z\text{SiO}_4:\text{Eu}^{2+}$ in which x, y, and z are each independently any value between 0 and 2, including 0 and 2. In some implementations, divalent Eu, which serves as an activator, is present in any amount between 0.0001% and about 5% in mole percent based on the total molar weight of said composition. Thus, the activator, Eu, may be present in any amount between 0.0001% and 5.00% in mole percent based on the total molar weight of the composition, including every thousandth percentage therebetween. In other implementations, the parameters x, y and z are $0.5 \leq x \leq 1.5$; $0 \leq y \leq 0.5$; and $0.5 \leq z \leq 1.5$ in the above formula. In yet other implementations, the parameters x, y and z are $1.5 \leq x \leq 2.5$; $0 \leq y \leq 0.5$; and $0 \leq z \leq 0.5$ in the above formula. The parameters x, y and z may also be $1.0 \leq x \leq 2.0$; $0 \leq y \leq 1.0$; and $0 \leq z \leq 0.5$ in the above formula.

[00146] The above phosphor $\text{Sr}_x\text{Ba}_y\text{Ca}_z\text{SiO}_4:\text{Eu}^{2+}$ may further include at least one additional element selected from the group consisting of: Ce, Mn, Ti, Pb, and Sn. In some implementations, such an additional element is present in the phosphor in any amount between 0.0001% and 5.00% in mole percent based upon the total molar weight of the phosphor.

[00147] The examples of phosphors described in U.S. Patent Application Publication No. 2005/0023962 include $\text{ZnS}_x\text{Se}_y\text{:Cu,A}$ in which x and y are each independently any value between 0 and 1 and A is at least one of Ag, Al, Ce, Tb, Cl, I, Mg, Mn. The monovalent Cu, which serves as the main activator, may be present in any amount between 0.0001% and about 5% in mole percent based on the total molar weight of said composition. Thus, the activator, Cu, may be present in any amount between 0.0001% and 5.00% in mole percent based on the total molar weight of the composition, including every thousandth percentage therebetween. In some implementations, the parameters x, y and z are $0.5 \leq x \leq 1$ and $0 \leq y \leq 0.5$ in the above formula. In other implementations, the parameters x, y and z are $0 \leq x \leq 0.5$ and $0 \leq y \leq 0.5$ in the above formula. The parameters x, y and z may also be $0 \leq x \leq 0.5$ and $0.5 \leq y \leq 1.0$ in the above formula.

[00148] The examples of phosphors described in U.S. Patent Application Publication No. 2005/023963 include thioselenide and/or selenide-based fluorescent materials which are capable of absorbing with high efficiency blue, violet, or ultraviolet (UV) light and emitting light of a wavelength longer than that absorbed from the light source. Such phosphor materials may be manufactured to emit broad color spectra that can be tuned from blue to green to yellow and red emissions. Two or more phosphors may be mixed in order to achieve a specific, desired white color performance. One example is $\text{MA}_2(\text{S}_x\text{Se}_y)_4\text{:B}$ in which x and y are each independently any value between about 0.01 and about 1; M is at least one of Be, Mg, Ca, Sr, Ba, Zn; and A is at least one of Al, Ga, In, Y, La, and Gd; and the activator B is at least one of Eu, Ce, Cu, Ag, Al, Tb, Cl, F, Br, I, Pr, Na, K, Mg, and Mn. The divalent Eu, which can serve as the main activator, may be present in any amount between 0.0001% and

about 10% in mole percent based on the total molar weight of said composition.

[00149] Thus, the activator, Eu, may be present in any amount between 0.0001% and 10.00% in mole percent based on the total molar weight of the composition, including every thousandth percentage therebetween. In some implementations, the parameters x , y , and z are $0.5 \leq x \leq 1$ and $0 \leq y \leq 0.5$ in the above formula. In other implementations, the parameter x , y and z are $0 \leq x \leq 0.5$ and $0.5 \leq y \leq 1.0$ in the above formula. In yet other implementations, x is about 0 and y is about 1 in the above formula, or x is about 1 and y is about 0 in the above formula.

[00150] Another example is $M_2A_4(S_xSe_y)_7:B$ in which x and y are each independently any value between about 0.01 and about 1, M is at least one of Be, Mg, Ca, Sr, Ba, Zn; and A is at least one of Al, Ga, In, Y, La, and Gd; and B is at least one of Eu, Ce, Cu, Ag, Al, Tb, Cl, Br, F, I, Pr, K, Na, Mg, and Mn. The divalent Eu, which can serve as the main activator, may be present in any amount between 0.0001% and about 10% in mole percent based on the total molar weight of said composition.

Thus, the activator, Eu, may be present in any amount between 0.0001% and 10.00% in mole percent based on the total molar weight of the composition, including every thousandth percentage there between. In some implementations, the parameters x and y are $0.5 \leq x \leq 1$ and $0 \leq y \leq 0.5$ in the above formula. In other implementations, the parameters x and y are $0 \leq x \leq 0.5$ and $0 \leq y \leq 0.5$ in the above formula. In yet other implementations, x is about 1 and y is about 0 in the above formula, or x is about 0 and $y=1$ in the above formula, or $0 \leq x \leq 0.5$ and $0.5 \leq y \leq 1.0$ in the above formula, or x is about 0.75 and y is about 0.25 in the above formula.

[00151] Yet another example described in U.S. Patent Application Publication No. 2005/023963 is $(M1)_m(M2)_nA_2(S_xSe_y)_4:B$

in which: M1 comprises an element selected from the group consisting of: Be, Mg, Ca, Sr, Ba, Zn; M2 comprises an element selected from the group consisting of: Be, Mg, Ca, Sr, Ba, Zn; A comprises one or more elements selected from the group consisting of: Al, Ga, In, Y, La, and Gd; and B comprises one or more elements selected from the group consisting of: Eu, Ce, Cu, Ag, Al, Tb, Cl, Br, F, I, Mg, Pr, K, Na, and Mn. B may be present in any amount between 0.0001% and about 10% in mole percent based on the total molar weight of said composition, and wherein x and y are each independently any value between 0 and 1, subject to the provisos that the sum of x and y is equal to any number in the range of between about 0.75 and about 1.25, the sum of m and n is about 1, and M1 is different than M2. In some implementations, the parameters x and y are $0.5 \leq x \leq 1$ and $0 \leq y \leq 0.5$ in the above formula. In other implementations, the parameters x and y are $0 \leq x \leq 0.5$ and $0 \leq y \leq 0.5$, or $0 \leq x \leq 0.5$ and $0.5 \leq y \leq 1.0$, or x is about 0.75 and y is about 0.25, or x is about 0 and y is about 1, or x is about 1 and y is about 0 in the above formula.

[00152] Yet another example described in U.S. Patent Application Publication No. 2005/023963 is: $(M1)_m(M2)_nA_4(S_xSe_y)_7:B$ in which M1 comprises an element selected from the group consisting of: Be, Mg, Ca, Sr, Ba, Zn; M2 comprises an element selected from the group consisting of: Be, Mg, Ca, Sr, Ba, Zn; A comprises one or more elements selected from the group consisting of: Al, Ga, In, Y, La, and Gd; and B comprises one or more elements selected from the group consisting of: Eu, Ce, Cu, Ag, Al, Th, Cl, Br, F, I, Mg, Pr, K, Na, and Mn. B may be present in any amount between 0.0001% and about 10% in mole percent based on the total molar weight of said composition, and wherein x and y are each independently any value between 0 and 1, subject to the provisos that the sum of x and y is equal to

any number in the range of between about 0.75 and about 1.25, the sum of m and n is about 2, and M1 is different than M2. In some implementations, the parameters x and y are $0.5 \leq x \leq 1$ and $0 \leq y \leq 0.5$ in the above formula. In other implementations, the parameters are $0 \leq x \leq 0.5$ and $0 \leq y \leq 0.5$, or $0 \leq x \leq 0.5$ and $0.5 \leq y \leq 1.0$, or x is about 0.75 and y is about 0.25, or x is about 0 and y is about 1, or x is about 1 and y is about 0 in the above formula.

[00153] In the above examples, the color generation is based on mixing of three primary colors of red, green, and blue. The described devices, systems, and techniques, however, may use mixing of four or more colors to generate the desired colors. For example, four different colors may be used. Accordingly, the screens shown in FIGS. 1 and 2 use four different color phosphor stripes and each color pixel includes four sub color pixels. The display systems in FIGS. 23-25 under this 4-color scheme can use four monochromatic laser display modules in four different colors to produce the final color images on the common display screen.

[00154] A phosphor screen, which may be used as either a projection screen or a final viewing screen may be fabricated by various techniques. Examples of fabrication techniques include, among others, the following: inkjet printing, painting, gravity settling, settling with compression, slurry, slurry with segregation, dusting, photo-tacky dusting, thin screen evaporation and sputtering, screen printing, pressed printing, pulsed laser deposition, centrifugal deposition, electrophoretic deposition, spraying, electrostatic dusting, tape transfer, reactive deposition, reactive evaporation, RF sputtering with ion implantation of activators, metal organic chemical vapor deposition (MOCVD), and atomic layer epitaxy.

1. Painting

[00155] The painting techniques apply luminescent paints on a substrate, such as fluorescent, phosphorescent and self-luminous painting materials. Paints can be organic or inorganic in nature and are used with a vehicle such as lacquers or oils.

5 Paints can be applied with a brush, roller or a spraying device. Stencils may be used to obtain detailed spatial patterns. Paints can also be applied via off-set printing methods. These fluorescence and phosphorescent paints can be excited via IR, visible or UV radiation. In the self luminous paints the source
10 of the excitation is a radioactive material (ex. Radium) mixed with the paint.

2. Settling by Gravity

[00156] Settling is a well known method and is documented in the literature. See, e.g., Pringsheim & Vogel, Luminescence of
15 Liquids and Solids, Interscience Publishers, 1946, NY, pp 144& 145; Hopkinson R. G., An Examination of Cathode Ray tube characteristics, Journal of the Institute of Electrical Engineers, Vol. 13, Part IIIa, No. 5 1946, pp. 779-794; Donofrio & Rehkopf, Screen Weight Optimization, Journal of the
20 Electrochemical Society, Vol. 126, No. 9, Sept. 1979, pp. 1563-1567; and Technical Information Booklet CM-9045, Method of Settling Phosphor Slides, GTE Sylvania, 3/82. For example, settling of phosphor slides may be achieved with a mixture of phosphor, a 1% barium acetate solution (in water), PS-6
25 potassium silicate and deionized water in a settling chamber. One recipe is to add 34 ml of the 1% barium acetate to the settling chamber. N. Yocom in the 1996 SID Seminar on Phosphor Screening discussed nine steps for settling and aluminizing a phosphor screen which are 1. settle phosphor on a face plate, 2.
30 a liquid cushion is decanted and siphoned off, 3. dry the settled screen, 4. bake the screen, 5. rewet the screen, 6.

apply a filming material on top of water, 7. remove water, 8. evacuate and evaporate the aluminum layer, 9. bake the screen.

3. Slurry

[00157] The slurry methods use a phosphor-containing slurry to
5 form a phosphor layer over a screen surface. See, e.g.,
Tatayama, Yamazaki, Kato & Tashima, European Patent Application
#86302192.9, filed March 25, 1986 by Sony. One of his recipes
is to use 100 g of phosphor, 0.6g of Aerosil, with 5 g of PVA
and 0.5g of ADC (ammonium dichromate) and 100g of water to form
10 the slurry. This slurry is then deposited near the center of the
face of a CRT screen panel and the panel is rotated and tilted
to spread the slurry over the inside of the face plate. A
cascaded slurry system may be used an aging effect where the
silicate concentration is set to be higher on the glass
15 substrate side than that on the electron gun side.

4. Dusting

[00158] Various dusting methods are known for forming phosphor
screens. Hopkinson R. G. in "An Examination of Cathode Ray tube
characteristics," Journal of the Institute of Electrical
20 Engineers, Vol. 13, Part IIIa, No. 5 1946, pp. 779-794 describes
a dusting method where the phosphor is sprayed into a wet or dry
binder. In another implementation, dusting can be done by
allowing the phosphor to fall on or to be projected on a
prepared surface. In yet another implementation of the dusting
25 approach, the phosphor material may be agitated through a sieve
or muslin gauze upon the screen plate coated with a suitable
binder such as sodium silicate. The U.S. Patent 3,025,161
entitled "Method of Forming Patterns" and issued March 13, 1962
discloses a dusting method where the phosphor is dusted more
30 vigorously via a dry powder spray system onto a wet photo-resist
prior to exposure. In addition, phosphors are dusted on photo-
tacky, coated dry surface and are exposed UV to allow the

coating to become tacky. This tacky nature of the surface coating causes the phosphor in the exposed areas to be attached to the surface. See, Nonogaki, Tomita, Nishizawa, Akagi & Kohasji, "Dry Process for Phosphor Screen Fabrication of Multicolored Cathode Ray Tubes," Research & Development in Japan, 1984, pp. 50-55.

5. Settling with Compression

[00159] Phosphor screens can also be made by settling the phosphors with compression. See, e.g., Oki K. & Ozawa L., A phosphor screen for high-resolution CRTs, Journal of the SID, Vol. 3, No. 2, Sept. 1995, pp. 51-57 which describes settling with normal sedimentation techniques and a use of a mechanical press machine to reduce the voids in the screen for high resolution uses.

6. Thin Film Screens Evaporation or Sputtering

[00160] High resolution screens can be made by evaporating or sputtering the phosphor on the substrate. For example, magnetron sputtering of ZnGa_2O_4 onto BaTiO_3 ceramic sheets have been used in thin film Electro-luminescent devices. Vacuum evaporation methods have been used to deposit a thin layer of phosphor on a substrate such as a $\text{SrS}:\text{Ce}$, Cl , Ag , Mn layer.

7. Screen Printing

[00161] Phosphor screens can also be made by screen printing techniques. In some implementations, a tight but spring-like cloth or metal mesh is used with areas blocked by a lacquer and aligned above a substrate to be coated. The slurry mix is then mechanically pressed through the selected areas of the mesh on to the substrate and the mesh springs back to its original position after the phosphor paste is applied. By photographic printing of patterns on a mesh, very fine patterns can be screen printed. In 1992 Morikawa et al discussed a method to achieve a smoother and better aging screen using a printing method plus

screen compression. This compression method allows the manufacturer to achieve higher packing densities. See, Morikawa, Seko, Kamogawa & Shimojo, Study to Improve Flood Beam CRT for Giant Screen Display, Japan Display '92, pp 385-388.

5 8. Pulsed Laser Deposition

[00162] Laser pulses can be directed to target materials and deposit the target materials on a screen. Greer et al in 1994 reported a Pulsed Laser Deposition (PLD) of phosphor screens used in helmet mounted displays (HMD). See, Greer, J.A. et al.,
10 P-53 Thin Film Phosphors Prepared by Pulsed - Laser Deposition, SID 94 Digest, pp. 827 - 830. A rastered laser with a wavelength of 248 nm was used to scan targets of Yttrium Aluminum Gallium Garnet phosphors and to deposit these materials on to sapphire substrates by ablation. A screen growth rate of
15 one micron per hour and screens of a thickness up to 8 microns were reported.

9. Centrifugal Deposition

[00163] A phosphor suspension in a solution can be deposited on a screen by using a centrifugal action. See, e.g., Mezner,
20 L.Z., Zumer, M., Nemanic, V., Centrifugal Settling of High Resolution 1-in CRT Screens, SID Digest 1994, pp 520-522. CRT screens have been made by this method where a stable phosphor suspension is made with a fine grain (less than 5 micron particle size) phosphor, a binder, electrolyte and in some cases
25 a dispersing agent. In some implementations, the settling in the centrifuge may be set at 3000 rpm for 2 minutes to 4000 rpm for 3 minutes. Screens of optimum screen weight of about 0.6 mg/cm² for 5 KV electrons was found using P20 phosphor with an average particle size of 1.9 microns. In a publication entitled
30 "Preparation of P43 Suspension and Screen-Quality Evaluation in CRTs" (SID '97 vol 28, pp 440-443), it is reported that a suspension containing (1.8 micron) P43 phosphor, Barium Acetate,

Potassium silicate and a surfactant was used in a centrifugal deposition process to achieve good electron aging with a screen weight of 1.0 mg/cm² at a screen thickness of approximately five particle diameters and an anode voltage of 5 KV.

5 10. Electrophoretic and Cataphoretic Coating

[00164] Electrophoretic or Cataphoretic phosphor coatings can be used to make high resolution phosphor screens. Schesinger described an electrophoretic coating process where a conductive coated glass face plate is put in a solution of a phosphor and electrolyte and a metallic anode (situated about two inches from the face plate). Sclesinger et al., Design Development and Fabrication of Ultra High-Resolution Cathode Ray tube. Technical Report ECOM-00476-February 1969, pp 64-72. When a DC electric current of 20 ma is passed through the solution the phosphor screen is deposited on the cathode. In May 1997, Schermerhorn, Sweeney & Wang from Electro Plasma and Park, Park and Kim from Samsung discussed the use of electrophoretic deposition of color phosphors for Plasma Display screens through the use of metalized recessed regions or cavities. J.M. Kim et al. Development of 4-in. Full Color FED, Devices SID97 Digest, pp 56-59; J.D. Schemerhorn et al. A Groved Structure for a Large High, Resolution Color ACPDP SID97 Digest, pp 229-232.

11. Spraying

[00165] Wet or dry phosphors can be sprayed on a substrate to form a phosphor screen. The nozzle of the spray gun can be changed to spray at various spray angles depending on the distance from the substrate and other constraints. A pressure pot is used as in various spray systems to keep the pressure constant to the spray gun. In the dry system, the dry phosphor is sprayed on the screen face whose surface is coated with an adhesive binder. Wet binders and dry binders can be used. In wet spraying, an organic binder such as nitrocellulose or PVA

may be used. A binder which becomes tacky under UV radiation bombardment may also be used.

11. Electrostatic Spray/Dust

[00166] Phosphor screens can also be made by using a phosphor
5 spray or dusting process in which the phosphor is charged and
blown against a charged screen surface. The phosphors are then
fixed to allow further processing. The US Patent 5,477,285
entitled "CRT developing apparatus" and issued Dec. 19, 1995
describes a process where a tribo-electric gun is used to charge
10 the phosphor, and the phosphor is fed to the panel using a
hopper, an auger to transfer the material from the hopper to the
venturi chamber. The venturi chamber dispenses the charged
phosphor to the latent image on the panel.

12. Transfer Tape

[00167] In a transfer tape method, the phosphor is coated on a
15 tape base with a layer to contain phosphor. Under the phosphor
layer is a release layer and the phosphor and binder are pressed
onto a substrate. The base tape is removed leaving the phosphor
and binder. See, N. Yocom - 1996 SID Seminar on Phosphor
20 Screening.

13. Reactive Deposition

[00168] Vapor reaction processes can be used for fabricating
phosphor layers such as ZnS phosphor layers. See, e.g., D.A.
Cusano, Cathodo-, Photo-, and D.C-, Electro - luminescence in
25 Zinc Sulfide Layers. Luminescence of Organic and Inorganic
Materials Edited by Kallman & Spruch Wiley & Sons 1962, pp 494-
522. The substrate to be coated can be heated to temperatures
from 400 - 700 deg C. For example, in making the phosphor
screen based on ZnS:Mn, materials Zn, ZnCl₂, MnCl₂ H₂S are
30 continuously present during the formation of the phosphor layer.
This process can also be used for fabricating electroluminescent
screens.

14. Reactive Evaporation

[00169] Reactive evaporation methods have been reported for making screens. Transparent thin films of $Y_2O_3S:Eu$ have been formed by a reactive evaporation process where the Yttrium metal is evaporated onto a substrate using an electron beam gun and excited SO_2 is introduced while simultaneously heating a crucible of $EuCl_2$ powder. Daud, Futaki, Ohmi, Tanaki & Kobayashi, Transparent $Y_2O_3S:Eu$ 3+ phosphor thin films grown by reactive evaporation and their luminescent properties, Journal of the Society for Information Display (SID), Vol 4, No 3 1996, pp 193-196.

15. RF Sputtering and Ion Implantation

[00170] In RF sputtering and ion implantation for forming phosphor screens, the activator ion is implanted. In N.M. Kalkhoran et al., Luminescence Study of Ion-Implanted, $ZnGa_2O_4$ Thin Films on Flexible Organic Substrates, SID '97 Digest, pp 623-626, RF sputtering was used to form thin film electroluminescent screens where $ZnGa_2O_4$ thin films were implanted on a flexible polyimide substrate with Mn, Eu to get green and red phosphor screens. The un-doped host material was used for the blue screen.

16. Metal Organic Chemical Vapor Deposition

[00171] Metal Organic Chemical Vapor Deposition (MOCVD) can be used to fabricate phosphor screens. As an example, a MOCVD process for fabricatingscreens with the $CaGa_2S_4:Ce$ phosphor was reported by Smith et. Al., in "Crystalline-As-Deposited $CaGa_2S_4:Ce$ via Low Temperature Metal Organic Chemical Vapor Deposition":SID Digest 1995, Vol. XXVI pp 728-731. Calcium metal-organics were used in the form of $Ca(2,2,6,6\text{-tetramethyl-3,5-heptanedionate})_2$ called $Ca(thd)_2$. The CaS was deposited using $Ca(thd)_2$ in an argon carrier gas and H_2S . with reactor pressures from 1 to 10 Torr. Substrates were glass, silicon and

coated EL substrates at temperatures from 400-600 deg C. The Ga_2S_3 and CaS formation was combined with the use of $\text{Ce}(\text{thd})_4$ to obtain the $\text{CaGa}_2\text{S}_4:\text{Ce}$ phosphor.

17. Atomic Layer Epitaxy

5 **[00172]** Atomic layer epitaxy has been used to form luminescent screens for alternating current thin film electroluminescent displays. See, Lindsay McDonald and Anthony Lowe, Display Systems, Publisher John Wiley & Sons 1997 pp. 195 & 196. A substrate was heated to a high temperature (500 °C) and was
10 exposed to low pressure chemical precursors for forming the screen layers. As an example, Zn and Mn can be used as part of the precursors for forming a $\text{ZnS}:\text{Mn}$ layer. The reactor is evacuated and Sulfur is introduced. The epitaxy cycle is then started to form the layers.

15 **[00173]** The phosphor materials used for screens described in this application may be prepared as phosphor nanoscale powders where in the phosphor materials are nanoscale particles or grains of 500 nm or less to produce enhanced optical conversion efficiency. Such phosphor nanoscale powders may be prepared by
20 forming a solution or slurry which comprises phosphor precursors and then firing the solid residue of the solution or slurry which comprises the phosphor precursors. The phosphor precursors in the form of nano-sized particles or grains have a dimension less than 500 nm, preferably 200 nm or less, more
25 preferably 100 nm or less, even more preferably 50 nm or less, and most preferably 10 nm or less. Thus, the nano-sized particles may have an average particle size of in the range from 1 nm to 500 nm, preferably 2nm to 200 nm, more preferably 2 nm to 100 nm, even more preferably 2 nm to 50 nm, most preferably 3
30 nm to 10 nm. The nano-sized particles of the precursor will also preferably have a uniform size distribution with a variation within a range, e.g., 10% or less. U.S. Patent No. 6,576,156,

which is incorporated by reference in its entirety as part of this application, describes examples of phosphor nanoscale powders and fabrication techniques. In one implementation, phosphor nanoscale powders may be prepared by (1) forming a solution or slurry which contains nanosized particles of the phosphor precursors, (2) drying the solution or slurry to obtain a residue; and (3) firing the residue to form a phosphor nanoscale powder.

[00174] TABLE 2 lists example phosphor compositions that are suitable as fluorescent materials for the phosphor screen discussed above.

TABLE 2: Summary of Example Phosphors

Phosphor composition
Oxide-based Phosphors $(Y, Gd, La)_2O_3:Eu, Sm, Ce, Bi$; $(Y, Gd, La)_2O_3S:Eu, Sm, Ce, Bi$; $(Y, Gd, La)VO_4:Eu, Sm, Ce, Bi$; $2SrO \cdot 0.84P_2O_5 \cdot 0.16B_2O_3:Eu$; $SrLa_2BeO_5:Ce$; $0.82BaO \cdot 6Al_2O_3:Eu$; $1.29BaO \cdot 6Al_2O_3:Eu$; $(Ca, Zn)_2GeO_4:Mn$; $(Tb_{(1-x-y)}(Y, La, Gd, Sm)_x(Ce, Pr, Nd, Sm, Eu, Gd, Dy, Ho, Er, Tm, Yb, Lu)_y)_3(Al, Ga, In)_2O_{12}$.
Silicate-based Phosphors $(Mg, Ba, Sr, Ca, Zn)_2SiO_4:Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr$; $(Mg, Ba, Sr, Ca)SiO_4:Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr$; $(Mg, Ba, Sr, Ca)SiO_5:Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr$; $ZrSiO_4:Pr$; $Ca_3Sc_2Si_3O_{12}:Ce$; $Y_2SiO_5:Tb$; $Y_2Si_2O_7:Tb$; $CaMgSiO:Ce$; $Ca_2MgSi_2O_7:Ce$; $(Ca, Sr)_2Al_2SiO_7:Ce$; $SrAl_2Si_2O_8:Eu$; $CaMgSi_2O_6:Eu$; $SrAl_{10}SiO_{20}:Eu$; $Sr_3MgSi_2O_8:Eu$; $Sr_{1..3}Mg_{0.7}SiO_4:Eu$; $(Ba, Sr, Ca)_3MgSi_2O_8:Eu$; $Y_2SiO_5:Ce$; $Sr_2Si_3O_8 \cdot 2SrCl_2:Eu$; $BaSi_2O_5:Eu$; $Sr_3MgSi_2O_7:Eu$.
Phosphate-based and Halophosphate-based Phosphors $Zn_2(PO_4)_2:Mn$; $(Mg, Ba, Ca, Sr)_5(PO_4)_3Cl:Eu, Sm, Ce$; $(Sr, Ca,$

$\text{Eu}_{10}(\text{PO}_4)_6\text{Cl}_2 \cdot 0.24\text{B}_2\text{O}_3$;
Borate-based Phosphors $(\text{Y}, \text{Gd}, \text{La}, \text{Lu})\text{BO}_3:\text{Eu}, \text{Sm}, \text{Ce}, \text{Bi}$; $\text{Y}(\text{Mg}, \text{Ba}, \text{Ca}, \text{Sr})_3(\text{Al}, \text{Ga}, \text{In})_3\text{B}_4\text{O}_{15}:\text{Eu}$; $\text{YCa}_3\text{Ga}_3\text{B}_4\text{O}_{15}:\text{Eu}$
Aluminate-based and Gallate-based Phosphors $(\text{Y}, \text{Gd})_3(\text{Al}, \text{Ga})_5\text{O}_{12}:\text{Eu}, \text{Ce}, \text{Pr}$; $(\text{Mg}, \text{Ba}, \text{Ca}, \text{Sr})\text{MgAl}_{10}\text{O}_{17}:\text{Eu}, \text{Mn}$; $(\text{Ca}, \text{Mg}, \text{Ba}, \text{Zn})(\text{Ga}, \text{Al})_2\text{O}_4:\text{Mn}, \text{Eu}, \text{Dy}$; $(\text{Ba}, \text{Mg}, \text{Ca}, \text{Sr})\text{MgAl}_{14}\text{O}_{23}:\text{Mn}, \text{Eu}$; $(\text{Mg}, \text{Ba}, \text{Ca}, \text{Sr})\text{Al}_{12}\text{O}_{19}:\text{Mn}$; $\text{BaMg}_2\text{Al}_{16}\text{O}_{27}:\text{Eu}, \text{Mn}$; $\text{ZnGa}_2\text{O}_4:\text{Mn}$; $(\text{Li}_{0.5}\text{Ga}_{0.5})_{0.5}\text{Zn}_{0.5}\text{Ga}_2\text{O}_4$
Molybdate-based and Tungstate-based Phosphors $(\text{Li}, \text{K}, \text{Na}, \text{Ag})\text{Eu}_{(1-x)}(\text{Y}, \text{La}, \text{Gd})_x(\text{W}, \text{Mo})_2\text{O}_8$; $(\text{Li}, \text{K}, \text{Na}, \text{Ag})\text{Eu}_{(1-x)}(\text{Y}, \text{La}, \text{Gd})_x(\text{W}, \text{Mo})_2\text{O}_8:\text{Sm}$; $\text{CaWO}_4:\text{Tb}, \text{Pb}$
Fluoride-based Phosphors $(\text{KF}, \text{MgF}_2):\text{Mn}$, $\text{MgF}_2:\text{Mn}$, $(\text{Zn}, \text{Mg})\text{F}_2:\text{Mn}$; $3.5\text{MgO} \cdot 0.5\text{MgF}_2 \cdot \text{GeO}_2:\text{Mn}$; $\text{Mg}_4(\text{F})(\text{Ge}, \text{Sn})\text{O}_6:\text{Mn}$;
Sulfide-based Phosphors $(\text{Be}, \text{Mg}, \text{Ca}, \text{Sr}, \text{Ba}, \text{Zn})\text{S}:\text{Eu}, \text{Ce}, \text{Cu}, \text{Ag}, \text{Al}, \text{Au}, \text{Tb}, \text{Cl}, \text{Pr}, \text{Mn}, \text{Bi}$; $(\text{Be}, \text{Mg}, \text{Ca}, \text{Sr}, \text{Ba}, \text{Zn})(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Gd})_2\text{S}_4:\text{Eu}, \text{Ce}, \text{Cu}, \text{Ag}, \text{Al}, \text{Tb}, \text{Cl}, \text{Pr}, \text{Mn}$; $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})_2(\text{Zn}, \text{Si}, \text{Ge}, \text{Sn})\text{S}_3:\text{Eu}$; $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})_2(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Ga})_2\text{S}_3:\text{Eu}$
Nitride- and Oxynitride-based Phosphors $\text{Ca}_2\text{Si}_5\text{N}_8:\text{Eu}$; $\text{SrSi}_2\text{O}_2\text{N}_2:\text{Eu}$; $\text{CaAlSiN}_3:\text{Eu}$ Si_6AlON_8 ; $\text{Si}_3\text{N}_4\text{--M}_2\text{O}_3\text{--CaO--AlN--Al}_2\text{O}_3$ $\text{LaSi}_3\text{N}_5:\text{Ce}$; $(\text{Li}, \text{Ca}, \text{Mg}, \text{Y})\text{Si}_{12}\text{AlON}_{16} : \text{Ce}, \text{P}, \text{Eu}, \text{Tb}, \text{Yb}, \text{Er}, \text{Dy}$
Sulfoselenide-based Phosphors $(\text{Be}, \text{Mg}, \text{Ca}, \text{Sr}, \text{Ba}, \text{Zn})\text{Se}_x\text{S}_{1-x}:\text{Eu}, \text{Ce}, \text{Cu}, \text{Ag}, \text{Al}, \text{Tb}, \text{Cl}, \text{Pr}, \text{Mn}$; $(\text{Be}, \text{Mg}, \text{Ca}, \text{Sr}, \text{Ba}, \text{Zn})(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Gd})_2(\text{Se}_x\text{S}_{1-x})_4:\text{Eu}, \text{Ce},$

Cu, Ag, Al, Tb, Cl, Pr, Mn;

[00175] TABLE 2 further classifies the phosphor composition into various groups. For example, the groups can be Oxide-based phosphor, Silicate-based phosphor, Phosphate-based phosphor, Borate-based phosphor, Aluminate-based phosphor, Gallate-based phosphor, Molybdate-based phosphor, Tungstate-based phosphor, Fluoride-based phosphor, Sulfide-based phosphor, Nitride- and Oxynitride-based phosphor, and Sulfoselenide-based phosphor.

[00176] UV-excitable non-phosphor organic material suitable of color or monochromatic screens described in this application can be implemented by various material compositions. FIG. 8 shows a table of exemplary organic materials, along with their chemical structures, colors, and fluorescent colors. The exemplary organic material are Brilliant sulfoflavine FF, Basic yellow HG, Eosine, Rhodamine 6G, and Rhodamine B. Additionally, these organic materials can include organic dyes.

[00177] FIG. 9 shows a table of organic dyes that can be used as fluorescent material for display screens. As shown in FIG. 9, many different kinds of organic dyes can be used. In general, any organic material or organic dye capable of absorbing excitation light such as UV light and emitting photons in the visible range at wavelengths longer than the excitation light wavelength can be used. FIG. 10 shows the luminescence spectra of the organic dyes listed in FIG. 9. As shown in FIG. 10, the emission spectra of the various organic dyes range from the ultraviolet to the infrared.

[00178] In addition to being used as fluorescent material for display screens, the organic compounds can also be used for contrast enhancement purposes, as discussed in detail previously in Fig. 5. Further, mixtures of the phosphors and/or organic material described above can be used to adjust the CIE

coordinates (emission spectra) of the emitted light. For example, the absorption and fluorescence spectra of the organic material can be obtained. FIGs. 11-13 show the absorption and fluorescence spectra of some organic compounds. FIG. 11 shows the absorption and fluorescence spectra of organic materials, Fluorescein (basic ethanol) and Eosin Y. FIG. 12 shows the absorption and fluorescence spectra of organic materials, Rhodamine 123 and Rhodamine 6G. FIG. 13 shows the absorption and fluorescence spectra of organic materials, Rhodamine B and Rose bengal.

[00179] Using the obtained absorption and fluorescence spectra of organic materials, candidate organic compounds for a certain color adjustment can be selected. For example, Fig. 14 illustrates how an organic compound (e.g., Rhodamine B) can be added to adjust the phosphor emission of an orange phosphor. As shown in FIG. 14, the organic compound (e.g., Rhodamine B) absorbs light at wavelengths between 560-570 nm from the emission spectra of the orange phosphor. Additionally, Rhodamine B has a fluorescence spectrum that peaks at wavelengths around 590-620 nm. Thus, by adding Rhodamine B to an orange phosphor, the organic compound can suppress the emission of the orange phosphor at wavelengths around 560-570 nm, and at the same time enhance the emission at wavelengths around 590-620 nm (i.e., the color red). In this manner, the organic compound can shift the phosphor emission spectra from orange to red.

[00180] In one implementation, the shifting of orange phosphor to red emission can be illustrated with examples shown in FIGs. 15-17. FIG. 15 shows the shifting of an orange phosphor emission spectrum when combined with various concentrations of Rhodamine B. Concentration 1 represents an amount of about 0.25 wt% of Rhodamine B; concentration 2 represents an amount of

about 0.5 wt% of Rhodamine B; and concentration 3 represents an amount of about 1 wt% of Rhodamine B. As shown in FIG. 15, the emission spectrum of the orange phosphor shifts to a longer wavelength when the concentration of the Rhodamine B organic compound increases.

[00181] FIG. 16 shows a comparison of the emission spectra of an orange phosphor and a mixture of the orange phosphor and Rhodamine B organic compound. In this implementation, the amount of Rhodamine B added was about 1 wt%. As shown in FIG. 16, by adding the organic compound, Rhodamine B, the chromaticity of the orange phosphor can be adjusted. For example, the short-wavelength (< 600nm) portion of the orange phosphor emission spectrum can be eliminated.

[00182] FIGs. 17A & 17B show the chromaticity performance of the adjusted orange phosphors (e.g., silicate) as a function of Rhodamine B concentration. As shown in FIG. 17A, the x CIE coordinate of the orange phosphor increases as the concentration (e.g., in mg/mL) of Rhodamine B increases. Similarly, as shown in FIG. 17B, the y CIE coordinate of the orange phosphor decreases as the concentration (e.g., in mg/mL) of Rhodamine B increases. Additionally, the chromaticity of other phosphors besides the orange phosphor can be adjusted using an appropriate organic dye listed in FIG. 9. Moreover, these organic compounds can adjust the chromaticity of phosphors and achieve purer colors of R, G, B, with narrow-band emission spectra for the phosphors. Thus, for example, phosphors with adjusted chromaticity can be used for display and lighting applications.

[00183] Furthermore, these organic compounds can have several material characteristics. For example, they do not absorb light at the excitation wavelength (e.g., around 405 nm); but do absorb portions of light from the phosphor emission spectra. Many phosphors have broad emission spectra and such broad

spectra can be adjusted to achieve the required chromaticity. The added organic compounds absorb part of the light from the phosphor emission spectra. For instance, if the emission of the phosphor needs to be more reddish (longer wavelength), then the organic compounds should absorb some emission from the bluish part (shorter wavelength) of the spectra and transfer the absorbed light to the red spectral region.

[00184] Additionally, these organic materials can be organic compounds soluble in alcohol, acetone or other organic solvents.

These organic materials can also be mixed with the phosphor composition. Methods of preparing a mixture of the organic materials with RGB phosphors can include, e.g., the following:

[00185] Method 1. Adding an organic compound or a mixture of the organic compounds to a binder. The binder can typically be a transparent material to promote adhesion of the phosphors to the screen. In this manner, the binder containing the organic compound or the mixture of the organic compounds can adjust the emission spectra of the inorganic phosphor.

[00186] In one implementation, approximately 0.25 grams of Rhodamine B can be mixed in a beaker with about 10 mL of water to obtain a Rhodamine B-Water mixture. The Rhodamine B-Water mixture can then be added to about 20 grams of an orange phosphor in another beaker to obtain a phosphor mixture. The phosphor mixture can then be mixed and stirred by hand and dried at, e.g., 60 degrees Celsius, in air. After the phosphor mixture is dried, it can then be mixed with a binder, which can be made of epoxy or silicon resin.

[00187] In another implementation, approximately 0.25 grams of Rhodamine B can be mixed in a beaker with about 10 mL of acetone or isopropanol alcohol to obtain a Rhodamine B-Solvent mixture. The Rhodamine B-Solvent mixture can then be added to about 20 grams of a binder, which can, e.g., be made of epoxy or silicon

resin. The Rhodamine B-Solvent-Binder mixture can then be mixed and stirred at room temperature. About 20 grams of orange phosphor can be added to the Rhodamine B-Solvent-Binder mixture to obtain a binder-phosphor mixture. The binder-phosphor mixture can then be stirred and mixed at room temperature.

[00188] Method 2. Coating RGB phosphors directly with a thin layer (e.g., 2-5 microns) of the organic compound or the mixture of the organic compounds. And then apply the coated phosphor with a transparent binder. In this manner, the thin coating layer on the phosphors can adjust the emission spectra.

[00189] Additional exemplary mixtures that can be used to adjust the CIE coordinates of the emitted light can include the following:

1. A mixture of a few red phosphors with different composition to an existing red phosphor in order to adjust the CIE coordinates of the red components of the screen.

2. A mixture of a few green phosphors with different composition to an existing green phosphor can be used to adjust the CIE coordinates of the green components of the screen.

3. A mixture of a few blue phosphors with different compositions to an existing blue phosphor can be used to adjust the CIE coordinates of the blue components of the screen.

4. A mixture including various amounts of mixtures 1, 2, and 3 above.

5. A mixture of the green and blue phosphors with red phosphor to adjust the CIE coordinates of the red components of the screen.

6. A mixture of the red and blue phosphors with green phosphor to adjust the CIE coordinates of the green components of the screen.

7. A mixture of the green and red phosphors with blue phosphor to adjust the CIE coordinates of the blue components of the screen.

9. A mixture of organic material to any of the mixtures 1-8 to adjust the CIE coordinates of the color screen.

[00190] Various amounts of the red, green, and blue phosphors can be combined to achieve a white color. The exact amount of each color component can depend on factors such as the excitation wavelength of the light source, excitation intensity (e.g., power of the excitation source), the CIE chromaticity of component colors, the desired brightness of the "white" color. Thus, for applications in which the excitation light source is below about 420nm, the white phosphor composition can be adjusted to accommodate for changes in the absorption characteristics of the phosphors at different excitation wavelengths. One example of obtaining a white phosphor mixture can include combining ZnS:Ag with (Zn,Cd)S:Cu,Al. Another example can include combining ZnS:Ag with Zn₂SiO₄:Mn and (Zn,Mg)₃(PO₄)₂:Mn to achieve a white phosphor.

[00191] Other examples of white phosphor compositions can include 8SrCO₃·4CaCO₃·11Al₂O₃·0.18Eu₂O₃ (~white); 3Ca₃(PO₄)₂·Ca(F,Cl)₂:Sb (~bluish white); 3Ca₃(PO₄)₂·Ca(F,Cl)₂:Sb,Mn (~white); 3Ca₃(PO₄)₂·Ca(F,Cl)₂:Sb (warm white); BaO·TiO₂P₂O₅ (~bluish white); and MgWO₄ (~bluish white). Additional white phosphor compositions can be obtained from commercial vendors such as GELCORE, LEUCHTSTOFFWERK, and PHILIPS. For instance, a white phosphor composition of Ca₂NaV₃Mg₂O₁₂:Eu³⁺ can be obtained from GELCORE. Further, PHILIPS has demonstrated using a blue LED (emission wavelength ~460nm-470nm) to excite a combination of SrGa₂S₄:Eu and AE₂Si₅N₈:Eu or a combination of SrGa₂S₄:Eu and AES:Eu to achieve white color.

[00192] In the above examples of scanning beam displays shown in FIGS. 3, 4A and 4B for implementing the scanning beam display in FIG. 1, the scan lens 360 is located downstream from the beam scanning devices 340 and 350 and focuses the one or more scanning excitation beams 120 onto the screen 101. This optical configuration is referred to as a "pre-objective" scanning system. In such a pre-objective design, a scanning beam directed into the scan lens 360 is scanned along two orthogonal directions. Therefore, the scan lens 360 is designed to focus the scanning beam onto the screen 101 along two orthogonal directions. In order to achieve the proper focusing in both orthogonal directions, the scan lens 360 can be complex and, often, are made of multiples lens elements. In one implementation, for example, the scan lens 360 can be a two-dimensional f-theta lens that is designed to have a linear relation between the location of the focal spot on the screen and the input scan angle (theta) when the input beam is scanned around each of two orthogonal axes perpendicular to the optic axis of the scan lens. In such a f-theta lens, the location of the focal spot on the screen is a proportional to the input scan angle (theta).

[00193] The two-dimensional scan lens 360 such as a f-theta lens in the pre-objective configuration can exhibit optical distortions along the two orthogonal scanning directions which cause beam positions on the screen 101 to trace a curved line. Hence, an intended straight horizontal scanning line on the screen 101 becomes a curved line. The distortions caused by the 2-dimensional scan lens 360 can be visible on the screen 101 and thus degrade the displayed image quality. One way to mitigate the bow distortion problem is to design the scan lens 360 with a complex lens configuration with multiple lens elements to reduce the bow distortions. The complex multiple lens elements can

cause the final lens assembly to depart from desired f-theta conditions and thus can compromise the optical scanning performance. The number of lens elements in the assembly usually increases as the tolerance for the distortions decreases. However, such a scan lens with complex multiple lens elements can be expensive to fabricate.

[00194] To avoid the above distortion issues associated with a two-dimensional scan lens in a pre-objective scanning beam system, the following sections describe examples of a post-objective scanning beam display system, which can be implemented to replace the two-dimensional scan lens 360 with a simpler, less expensive 1-dimensional scan lens. U.S. Patent Application No. 11/742,014 entitled "POST-OBJECTIVE SCANNING BEAM SYSTEMS" and filed on April 30, 2007 (U.S. Patent Publication

No. _____) describes examples of post-objective scanning beam systems suitable for use with phosphor screens described in this application and is incorporated by reference as part of the specification of this application. The phosphor compositions described in this application can be used in both post-objective and pre-objective scanning beam display systems.

[00195] FIG. 18 shows an example implementation of a post-objective scanning beam display system based on the system design in FIG. 1. A laser array 1810 with multiple lasers is used to generate multiple laser beams 1812 to simultaneously scan a screen 101 for enhanced display brightness. A signal modulation controller 320 is provided to control and modulate the lasers in the laser array 310 so that the laser beams 312 are modulated to carry the image to be displayed on the screen 101. The beam scanning is based on a two-scanner design with a horizontal scanner such as a polygon scanner 350 and a vertical scanner such as a galvanometer scanner 340. Each of the different reflective facets of the polygon scanner 350

simultaneously scans N horizontal lines where N is the number of lasers. A relay optics module 330 reduces the spacing of laser beams 312 to form a compact set of laser beams 332 that spread within the facet dimension of the polygon scanner 350 for the horizontal scanning. Downstream from the polygon scanner 350, there is a 1-D horizontal scan lens 1810 followed by a vertical scanner 340 (e.g., a galvo mirror) that receives each horizontally scanned beam 332 from the polygon scanner 350 through the 1-D scan lens 1810 and provides the vertical scan on each horizontally scanned beam 332 at the end of each horizontal scan prior to the next horizontal scan by the next facet of the polygon scanner 350.

[00196] Under this optical design of the horizontal and vertical scanning, the 1-D scan lens 1810 is placed downstream from the polygon scanner 140 and upstream from the vertical scanner 340 to focus each horizontal scanned beam on the screen 101 and minimizes the horizontal bow distortion to displayed images on the screen 101 within an acceptable range, thus producing a visually "straight" horizontal scan line on the screen 101.

Such a 1-D scan lens 1810 capable of producing a straight horizontal scan line is relatively simpler and less expensive than a 2-D scan lens of similar performance. Downstream from the scan lens 1810, the vertical scanner 340 is a flat reflector and simply reflects the beam to the screen 101 and scans vertically to place each horizontally scanned beam at different vertical positions on the screen 101 for scanning different horizontal lines. The dimension of the reflector on the vertical scanner 340 along the horizontal direction is sufficiently large to cover the spatial extent of each scanning beam coming from the polygon scanner 350 and the scan lens 1810. The system in FIG. 18 is a post-objective design because the 1-D scan lens 1810 is upstream from the vertical scanner 340. In

this particular example, there is no lens or other focusing element downstream from the vertical scanner 340.

[00197] Notably, in the post-objective system in FIG. 18, the distance from the scan lens to a location on the screen 101 for a particular beam varies with the vertical scanning position of the vertical scanner 340. Therefore, when the 1-D scan lens 1810 is designed to have a fixed focal distance along the straight horizontal line across the center of the elongated 1-D scan lens, the focal properties of each beam must change with the vertical scanning position of the vertical scanner 1810 to maintain consistent beam focusing on the screen 101. In this regard, a dynamic focusing mechanism can be implemented to adjust convergence of the beam going into the 1-D scan lens 1810 based on the vertical scanning position of the vertical scanner 340.

[00198] For example, in the optical path of the one or more laser beams from the lasers to the polygon scanner 350, a stationary lens and a dynamic refocus lens can be used as the dynamic focusing mechanism. Each beam is focused by the dynamic focus lens at a location upstream from the stationary lens. When the focal point of the lens coincides with the focal point of the lens, the output light from the lens is collimated. Depending on the direction and amount of the deviation between the focal points of the lenses, the output light from the collimator lens toward the polygon scanner 350 can be either divergent or convergent. Hence, as the relative positions of the two lenses along their optic axis are adjusted, the focus of the scanned light on the screen 101 can be adjusted. A refocusing lens actuator can be used to adjust the relative position between the lenses in response to a control signal. In this particular example, the refocusing lens actuator is used to adjust the convergence of the beam directed into the 1-D scan lens 1810

along the optical path from the polygon scanner 350 in
synchronization with the vertical scanning of the vertical
scanner 340. The vertical scanner 340 in FIG. 18 scans at a
much smaller rate than the scan rate of the first horizontal
5 scanner 350 and thus a focusing variation caused by the vertical
scanning on the screen 101 varies with time at the slower
vertical scanning rate. This allows a focusing adjustment
mechanism to be implemented in the system of FIG. 1 with the
lower limit of a response speed at the slower vertical scanning
10 rate rather than the high horizontal scanning rate.

[00199] While this specification contains many specifics,
these should not be construed as limitations on the scope of an
invention or of what may be claimed, but rather as descriptions
of features specific to particular embodiments of the invention.
15 Certain features that are described in this specification in the
context of separate embodiments can also be implemented in
combination in a single embodiment. Conversely, various
features that are described in the context of a single
embodiment can also be implemented in multiple embodiments
20 separately or in any suitable subcombination. Moreover,
although features may be described above as acting in certain
combinations and even initially claimed as such, one or more
features from a claimed combination can in some cases be excised
from the combination, and the claimed combination may be
25 directed to a subcombination or a variation of a subcombination.

[00200] Only a few implementations are disclosed. However, it
is understood that variations and enhancements may be made.

CLAIMS

What is claimed is:

1. A display device, comprising a fluorescent layer that
5 absorbs an excitation light at a single wavelength and emits visible light, the fluorescent layer comprising:

a plurality of parallel fluorescent stripes, wherein at least three adjacent fluorescent stripes are made of three different fluorescent materials: a first fluorescent material
10 that absorbs the excitation light and emits light of a first color, a second fluorescent material that absorbs the excitation light and emits light of a second color, and a third fluorescent material that absorbs the excitation light and emits light of a third color.

15 2. The device as in claim 1, wherein one of the different fluorescent materials in the fluorescent stripes comprises at least one of an Oxide-based phosphor, a Silicate-based phosphor, a Phosphate-based phosphor, a Borate-based phosphor, an
20 Aluminate-based phosphor, a Gallate-based phosphor, a Molybdate-based phosphor, a Tungstate-based phosphor, a Fluoride-based phosphor, a Sulfide-based phosphor, a Nitride-based and Oxynitride-based phosphor, and a Sulfoselenide-based phosphor.

25 3. The device as in claim 1, wherein one of the different fluorescent materials in the fluorescent stripes comprises a non-phosphor organic material.

30 4. The device as in claim 3, wherein the organic material comprises one or more of Fluorescein, Rhodamine 123, Rhodamine 6G, Rhodamine B, Rose Bengal, Brilliantulsulfoflavine FF, Basic yellow HG, and other organic dyes.

5. The device as in claim 2, wherein the Oxide-based phosphor comprises at least one of $(Y, Gd, La)_2O_3:(Eu, Sm, Ce, Bi)$; $(Y, Gd, La)O_2S:(Eu, Sm, Ce, Bi)$; $(Y, Gd, La)VO_4(Eu, Sm, Ce, Bi)$;
 5 $2SrO \cdot 0.84P_2O_5 \cdot 0.16B_2O_3:Eu$; $SrLa_2BeO_5:Ce$; $0.82BaO \cdot 6Al_2O_3:Eu$;
 $1.29BaO \cdot 6Al_2O_3:Eu$; $(Ca, Zn)_2GeO_4:Mn$; and $(Tb_{(1-x-y)}(Y, La, Gd, Sm)_x(Ce, Pr, Nd, Sm, Eu, Gd, Dy, Ho, Er, Tm, Yb, Lu)_y)_3(Al, Ga, In)_2 O_{12}$.

10 6. The device as in claim 2, wherein the Silicate-based phosphor comprises at least one of $(Mg, Ba, Sr, Ca, Zn)_2SiO_4:(Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr)$; $(Mg, Ba, Sr, Ca)SiO_4:Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr$; $(Mg, Ba, Sr, Ca)SiO_5:Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr$; $ZrSiO_4:Pr$; $Ca_3Sc_2Si_3O_{12}:Ce$; $Y_2SiO_5:Tb$; $Y_2Si_2O_7:Tb$; $CaMgSiO:Ce$;
 15 $Ca_2MgSi_2O_7:Ce$; $(Ca, Sr)_2Al_2SiO_7:Ce$; $SrAl_2Si_2O_8:Eu$; $CaMgSi_2O_6:Eu$;
 $SrAl_{10}SiO_{20}:Eu$; $Sr_3MgSi_2O_8:Eu$; $Sr_{1..3}Mg_{0.7}SiO_4:Eu$; $(Ba, Sr, Ca)_3MgSi_2O_8:Eu$; $Y_2SiO_5:Ce$; $Sr_2Si_3O_8 \cdot 2SrCl_2:Eu$; $BaSi_2O_5:Eu$; and $Sr_3MgSi_2O_7:Eu$.

20 7. The device as in claim 2, wherein the Phosphate-based phosphor comprises at least one of $Zn_2(PO_4)_2:Mn$; $(Mg, Ba, Ca, Sr)_5(PO_4)_3Cl:(Eu, Sm, Ce)$; and $(Sr, Ca, Eu)_{10}(PO_4)_6Cl_2 \cdot 0.24B_2O_3$.

8. The device as in claim 2, wherein the Borate-based phosphor
 25 comprises at least one of $(Y, Gd, La, Lu)BO_3:Eu, Sm, Ce, Bi$;
 $Y(Mg, Ba, Ca, Sr)_3(Al, Ga, In)_3B_4O_{15}:Eu$; and $YCa_3Ga_3B_4O_{15}:Eu$.

9. The device as in claim 2, wherein the Aluminate-based phosphor comprises at least one of $(Y, Gd)_3Al_5O_{12}:(Eu, Ce, Pr)$;
 30 $(Mg, Ba, Ca, Sr)MgAl_{10}O_{17}:(Eu, Mn)$; $(Ca, Mg, Ba, Zn)Al_2O_4:(Mn, Eu, Dy)$; $(Ba, Mg, Ca, Sr)MgAl_{14}O_{23}:Mn, Eu$; $(Mg, Ba, Ca, Sr)Al_{12}O_{19}:Mn$; and $BaMg_2Al_{16}O_{27}:Eu, Mn$.

10. The device as in claim 2, wherein the Gallate-based phosphor comprises at least one of $(Y, Gd)_3Ga_5O_{12}:(Eu, Ce, Pr)$; $(Ca, Mg, Ba, Zn)Ga_2O_4:(Mn, Eu, Dy)$; $ZnGa_2O_4:Mn$; and
 5 $(Li_{0.5}Ga_{0.5})_{0.5}Zn_{0.5}Ga_2O_4$.

11. The device as in claim 2, wherein the Molybdate-based phosphor comprises at least one of $(Li, K, Na, Ag)Eu_{(1-x)}(Y, La, Gd)_xMo_2O_8$ and $(Li, K, Na, Ag)Eu_{(1-x)}(Y, La, Gd)_xMo_2O_8:Sm$.

12. The device as in claim 2, wherein the Tungstate-based phosphor comprises at least one of $(Li, K, Na, Ag)Eu_{(1-x)}(Y, La, Gd)_xW_2O_8$; $(Li, K, Na, Ag)Eu_{(1-x)}(Y, La, Gd)_xW_2O_8:Sm$; and $CaWO_4:Tb, Pb$.

13. The device as in claim 2, wherein the Fluoride-based phosphor comprises at least one of $(KF, MgF_2):Mn$, $MgF_2:Mn$, $(Zn, Mg)F_2:Mn$; $3.5MgO \cdot 0.5MgF_2 \cdot GeO_2:Mn$; and $Mg_4(F)(Ge, Sn)O_6:Mn$.

14. The device as in claim 2, wherein the Sulfide-based phosphor comprises at least one of $(Be, Mg, Ca, Sr, Ba, Zn)S:(Eu, Ce, Cu, Ag, Al, Au, Tb, Cl, Pr, Mn, Bi)$; $(Be, Mg, Ca, Sr, Ba, Zn)(Al, Ga, In, Y, La, Gd)_2S_4:(Eu, Ce, Cu, Ag, Al, Tb, Cl, Pr, Mn)$; $(Mg, Ca, Sr, Ba)_2(Zn, Si, Ge, Sn)S_3:Eu$; and $(Mg, Ca, Sr, Ba)_2(Al, Ga, In, Y, La, Ga)_2S_3:Eu$.

15. The device as in claim 2, wherein the Nitride-based and Oxynitride-based phosphor comprises at least one of $Ca_2Si_5N_8:Eu$; $SrSi_2O_2N_2:Eu$; $CaAlSiN_3:Eu$; Si_6AlON_8 ; $Si_3N_4-M_2O_3-CaO-AlN-Al_2O_3$;
 30 $LaSi_3N_5:Ce$; and $(Li, Ca, Mg, Y)Si_{12}AlON_{16}:(Ce, P, Eu, Tb, Yb, Er, Dy)$

16. The device as in claim 2, wherein the Sulfoselenide-based phosphor comprises at least one of $(\text{Be}, \text{Mg}, \text{Ca}, \text{Sr}, \text{Ba}, \text{Zn})\text{Se}_x\text{S}_{1-x}:(\text{Eu}, \text{Ce}, \text{Cu}, \text{Ag}, \text{Al}, \text{Tb}, \text{Cl}, \text{Pr}, \text{Mn})$ and $(\text{Be}, \text{Mg}, \text{Ca}, \text{Sr}, \text{Ba}, \text{Zn})(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Gd})_2(\text{Se}_x\text{S}_{1-x})_4:(\text{Eu}, \text{Ce}, \text{Cu}, \text{Ag}, \text{Al}, \text{Tb}, \text{Cl}, \text{Pr}, \text{Mn})$.

17. The device as in claim 1, wherein one of the different fluorescent materials comprises at least one of $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})\text{S}:(\text{Eu}, \text{Mn})$, $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})\text{Se}_x\text{S}_{1-x}:(\text{Eu}, \text{Mn})$, $(\text{Zn}, \text{Cd})\text{S}:\text{Ag}, \text{Cl}$, $(\text{Zn}, \text{Cd})\text{S}:\text{Cu}, \text{Al}$, $(\text{KF}, \text{MgF}_2):\text{Mn}$, $\text{MgF}_2:\text{Mn}$, $(\text{Zn}, \text{Mg})\text{F}_2:\text{Mn}$, $3.5\text{MgO} \cdot 0.5\text{MgF}_2 \cdot \text{GeO}_2:\text{Mn}$, $(\text{K}, \text{Li}, \text{Na})\text{EuW}_2\text{O}_8$, $(\text{Y}, \text{Gd}, \text{La})_2\text{O}_3:(\text{Eu}, \text{Sm}, \text{Bi})$, $(\text{Y}, \text{Gd}, \text{La})\text{O}_2\text{S}:\text{Eu}, \text{Sm}, \text{Bi}$, $(\text{Y}, \text{Gd}, \text{La})\text{BO}_3(\text{Eu}, \text{Sm}, \text{Bi})$, $(\text{Y}, \text{Gd}, \text{La})\text{VO}_4:(\text{Eu}, \text{Sm}, \text{Bi})$, and $\text{CaAlSiN}_3:\text{Eu}$.

18. The device as in claim 1, wherein one of the different fluorescent materials comprises at least one of $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Gd})_2\text{S}_4:(\text{Eu}, \text{Mn})$, $(\text{Mg}, \text{Ca}, \text{Sr}, \text{Ba})(\text{Al}, \text{Ga}, \text{In}, \text{Y}, \text{La}, \text{Gd})_2(\text{Se}_x\text{S}_{1-x})_4:(\text{Eu}, \text{Mn})$, and $(\text{Ba}, \text{Sr}, \text{Ca})\text{SiO}_4:(\text{Eu}, \text{Mn})$.

19. The device as in claim 1, wherein one of the different fluorescent materials comprises at least one of $(\text{Ba}, \text{Mg}, \text{Sr})\text{Al}_{10}\text{O}_{17}:(\text{Eu}, \text{Mn})$ and $(\text{Sr}, \text{Ca}, \text{Ba}, \text{Mg})_{10}(\text{PO}_4)_6\text{C}_{12}:\text{Eu}$.

20. The device as in claim 1, wherein the excitation light is at an ultra violet wavelength.

21. The device as in claim 1, wherein the excitation light is at a violet wavelength.

22. The device as in claim 1, wherein the excitation light is at a wavelength less than about 450 nanometers.

23. The device as in claim 1, wherein the fluorescent layer further comprises:

a first optical absorbent material mixed in the first fluorescent material that absorbs light of the second and third colors and transmits light of the first color;

a second optical absorbent material mixed in the second fluorescent material that absorbs light of the first and third colors and transmits light of the second color; and

a third optical absorbent material mixed in the third fluorescent material that absorbs light of the first and second colors and transmits light of the third color.

24. The device as in claim 23, wherein the first optical absorbent material, the second optical absorbent material, and the third optical absorbent material substantially transmit the excitation light.

25. The device as in claim 24, wherein the excitation light is at a wavelength less than about 450 nanometers.

26. A display device, comprising

a fluorescent layer that absorbs the excitation light at a single wavelength and emits white light; and

optical filters positioned relative to the fluorescent layer to receive the white light and to transmit light of different colors, respectively.

27. The device as in claim 26, wherein the fluorescent layer comprises a non-phosphor organic material.

28. The device as in claim 27, wherein the organic material comprises one or more of Fluorescein, Rhodamine 123, Rhodamine

6G, Rhodamine B, Rose Bengal, Brilliant sulfoflavine FF, Basic yellow HG, and other organic dyes.

29. The device as in claim 26, wherein the fluorescent layer
 5 comprises at least one phosphor that absorbs the excitation light and emits light of a visible color, and where the at least one phosphor comprises at least one of an Oxide-based phosphor, a Silicate-based phosphor, a Phosphate-based phosphor, a Borate-based phosphor, an Aluminate-based phosphor, a Gallate-based
 10 phosphor, a Molybdate-based phosphor, a Tungstate-based phosphor, a Fluoride-based phosphor, a Sulfide-based phosphor, a Nitride-based and Oxynitride-based phosphor, and a Sulfoselenide-based phosphor.

15 30. The device as in claim 29, wherein the Oxide-based phosphor comprises at least one of $(Y, Gd, La)_2O_3:(Eu, Sm, Ce, Bi)$; $(Y, Gd, La)O_2S:(Eu, Sm, Ce, Bi)$; $(Y, Gd, La)VO_4(Eu, Sm, Ce, Bi)$; $2SrO \cdot 0.84P_2O_5 \cdot 0.16B_2O_3:Eu$; $SrLa_2BeO_5:Ce$; $0.82BaO \cdot 6Al_2O_3:Eu$; $1.29BaO \cdot 6Al_2O_3:Eu$; $(Ca, Zn)_2GeO_4:Mn$; and $(Tb_{(1-x-y)}(Y, La, Gd, Sm)_x(Ce, Pr, Nd, Sm, Eu, Gd, Dy, Ho, Er, Tm, Yb, Lu)_y)_3(Al, Ga, In)_2O_{12}$.

31. The device as in claim 29, wherein the Silicate-based phosphor comprises at least one of $(Mg, Ba, Sr, Ca, Zn)_2SiO_4:(Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr)$; $(Mg, Ba, Sr, Ca)SiO_4:Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr$; $(Mg, Ba, Sr, Ca)SiO_5:Eu, Ce, Mn, Ti, Pb, Sn, Li, Pr$; $ZrSiO_4:Pr$; $Ca_3Sc_2Si_3O_{12}:Ce$; $Y_2SiO_5:Tb$; $Y_2Si_2O_7:Tb$; $CaMgSiO:Ce$; $Ca_2MgSi_2O_7:Ce$; $(Ca, Sr)_2Al_2SiO_7:Ce$; $SrAl_2Si_2O_8:Eu$; $CaMgSi_2O_6:Eu$; $SrAl_{10}SiO_{20}:Eu$; $Sr_3MgSi_2O_8:Eu$; $Sr_{1..3}Mg_{0.7}SiO_4:Eu$; $(Ba, Sr, Ca)_3MgSi_2O_8:Eu$; $Y_2SiO_5:Ce$; $Sr_2Si_3O_8 \cdot 2SrCl_2:Eu$; $BaSi_2O_5:Eu$; and $Sr_3MgSi_2O_7:Eu$.

32. The device as in claim 29, wherein the Phosphate-based phosphor comprises at least one of $\text{Zn}_2(\text{PO}_4)_2:\text{Mn}$; $(\text{Mg}, \text{Ba}, \text{Ca}, \text{Sr})_5(\text{PO}_4)_3\text{Cl}:(\text{Eu}, \text{Sm}, \text{Ce})$; and $(\text{Sr}, \text{Ca}, \text{Eu})_{10}(\text{PO}_4)_6\text{Cl}_2 \cdot 0.24\text{B}_2\text{O}_3$.

5 33. The device as in claim 29, wherein the Borate-based phosphor comprises at least one of $(\text{Y}, \text{Gd}, \text{La}, \text{Lu})\text{BO}_3:\text{Eu}, \text{Sm}, \text{Ce}, \text{Bi}$; $\text{Y}(\text{Mg}, \text{Ba}, \text{Ca}, \text{Sr})_3(\text{Al}, \text{Ga}, \text{In})_3\text{B}_4\text{O}_{15}:\text{Eu}$; and $\text{YCa}_3\text{Ga}_3\text{B}_4\text{O}_{15}:\text{Eu}$.

10 34. The device as in claim 29, wherein the Aluminate-based phosphor comprises at least one of $(\text{Y}, \text{Gd})_3\text{Al}_5\text{O}_{12}:(\text{Eu}, \text{Ce}, \text{Pr})$; $(\text{Mg}, \text{Ba}, \text{Ca}, \text{Sr})\text{MgAl}_{10}\text{O}_{17}:(\text{Eu}, \text{Mn})$; $(\text{Ca}, \text{Mg}, \text{Ba}, \text{Zn})\text{Al}_2\text{O}_4:(\text{Mn}, \text{Eu}, \text{Dy})$; $(\text{Ba}, \text{Mg}, \text{Ca}, \text{Sr})\text{MgAl}_{14}\text{O}_{23}:\text{Mn}, \text{Eu}$; $(\text{Mg}, \text{Ba}, \text{Ca}, \text{Sr})\text{Al}_{12}\text{O}_{19}:\text{Mn}$; and $\text{BaMg}_2\text{Al}_{16}\text{O}_{27}:\text{Eu}, \text{Mn}$.

15 35. The device as in claim 29, wherein the Gallate-based phosphor comprises at least one of $(\text{Y}, \text{Gd})_3\text{Ga}_5\text{O}_{12}:(\text{Eu}, \text{Ce}, \text{Pr})$; $(\text{Ca}, \text{Mg}, \text{Ba}, \text{Zn})\text{Ga}_2\text{O}_4:(\text{Mn}, \text{Eu}, \text{Dy})$; $\text{ZnGa}_2\text{O}_4:\text{Mn}$; and $(\text{Li}_{0.5}\text{Ga}_{0.5})_{0.5}\text{Zn}_{0.5}\text{Ga}_2\text{O}_4$.

20 36. The device as in claim 29, wherein the Molybdate-based phosphor comprises at least one of $(\text{Li}, \text{K}, \text{Na}, \text{Ag})\text{Eu}_{(1-x)}(\text{Y}, \text{La}, \text{Gd})_x\text{Mo}_2\text{O}_8$ and $(\text{Li}, \text{K}, \text{Na}, \text{Ag})\text{Eu}_{(1-x)}(\text{Y}, \text{La}, \text{Gd})_x\text{Mo}_2\text{O}_8:\text{Sm}$.

25 37. The device as in claim 29, wherein the Tungstate-based phosphor comprises at least one of $(\text{Li}, \text{K}, \text{Na}, \text{Ag})\text{Eu}_{(1-x)}(\text{Y}, \text{La}, \text{Gd})_x\text{W}_2\text{O}_8$; $(\text{Li}, \text{K}, \text{Na}, \text{Ag})\text{Eu}_{(1-x)}(\text{Y}, \text{La}, \text{Gd})_x\text{W}_2\text{O}_8:\text{Sm}$; and $\text{CaWO}_4:\text{Tb}, \text{Pb}$.

30 38. The device as in claim 29, wherein the Fluoride-based phosphor comprises at least one of $(\text{KF}, \text{MgF}_2):\text{Mn}$, $\text{MgF}_2:\text{Mn}$, $(\text{Zn}, \text{Mg})\text{F}_2:\text{Mn}$; $3.5\text{MgO} \cdot 0.5\text{MgF}_2 \cdot \text{GeO}_2:\text{Mn}$; and $\text{Mg}_4(\text{F})(\text{Ge}, \text{Sn})\text{O}_6:\text{Mn}$.

39. The device as in claim 29, wherein the Sulfide-based phosphor comprises at least one of (Be, Mg, Ca, Sr, Ba, Zn)S:(Eu, Ce, Cu, Ag, Al, Au, Tb, Cl, Pr, Mn, Bi); (Be, Mg, Ca, Sr, Ba, Zn)(Al, Ga, In, Y, La, Gd)₂S₄:(Eu, Ce, Cu, Ag, Al, Tb, Cl, Pr, Mn); (Mg, Ca, Sr, Ba)₂(Zn, Si, Ge, Sn)S₃:Eu; and (Mg, Ca, Sr, Ba)₂(Al, Ga, In, Y, La, Ga)₂S₃:Eu.

40. The device as in claim 29, wherein the Nitride-based and Oxynitride-based phosphor comprises at least one of Ca₂Si₅N₈:Eu; SrSi₂O₂N₂:Eu; CaAlSiN₃:Eu; Si₆AlON₈; Si₃N₄-M₂O₃-CaO-AlN-Al₂O₃; LaSi₃N₅:Ce; and (Li,Ca,Mg,Y)Si₁₂AlON₁₆: (Ce,P,Eu,Tb,Yb, Er, Dy)

41. The device as in claim 29, wherein the Sulfoselenide-based phosphor comprises at least one of (Be, Mg, Ca, Sr, Ba, Zn)Se_xSi_{1-x}:(Eu, Ce, Cu, Ag, Al, Tb, Cl, Pr, Mn) and (Be, Mg, Ca, Sr, Ba, Zn)(Al, Ga, In, Y, La, Gd)₂(Se_xSi_{1-x})₄:(Eu, Ce, Cu, Ag, Al, Tb, Cl, Pr, Mn).

42. The device as in claim 26, wherein the fluorescent layer consists essentially of:

at least one of a red phosphor material that absorbs the excitation light and emits red color and comprises at least one of (Mg, Ca, Sr, Ba)S:(Eu, Mn), (Mg, Ca, Sr, Ba)Se_xSi_{1-x}:(Eu, Mn), (Zn, Cd)S:Ag,Cl, (Zn, Cd)S:Cu,Al, (KF, MgF₂):Mn, MgF₂:Mn, (Zn, Mg)F₂:Mn, 3.5MgO·0.5MgF₂·GeO₂:Mn, (K, Li, Na)EuW₂O₈, (Y, Gd, La)₂O₃:(Eu, Sm, Bi), (Y, Gd, La)O₂S:Eu, Sm, Bi, (Y, Gd, La)BO₃(Eu, Sm, Bi), (Y, Gd, La)VO₄:(Eu, Sm, Bi), and CaAlSiN₃:Eu, and a red organic material that absorbs the excitation light and emits red color;

at least one of a green phosphor material that absorbs the excitation light and emits green color comprises at least one of (Mg, Ca, Sr, Ba)(Al, Ga, In, Y, La, Gd)₂S₄:(Eu, Mn), (Mg, Ca, Sr,

Ba)(Al, Ga, In, Y, La, Gd)₂(Se_xSi_{1-x})₄:(Eu, Mn), and (Ba, Sr, Ca)SiO₄:(Eu, Mn), and a green organic material that absorbs the excitation light and emits green color; and

at least one of a blue phosphor material that absorbs the excitation light and emits blue color and comprises at least one of (Ba, Mg, Sr)Al₁₀O₁₇:(Eu, Mn) and (Sr, Ca, Ba, Mg)₁₀(PO₄)₆Cl₁₂:Eu, and a blue organic material that absorbs the excitation light and emits blue color.

43. The device as in claim 26, wherein the excitation light is at an ultra violet wavelength.

44. The device as in claim 26, wherein the excitation light is at a violet wavelength.

45. The device as in claim 26, wherein the excitation light is at a wavelength less than about 450 nanometers.

46. The device as in claim 26, wherein the fluorescent layer consists essentially of at least one of 8SrCO₃·4CaCO₃·11Al₂O₃·0.18Eu₂O₃; 3Ca₃(PO₄)₂·Ca(F,Cl)₂:Sb; 3Ca₃(PO₄)₂·Ca(F,Cl)₂:Sb,Mn; 3Ca₃(PO₄)₂·Ca(F,Cl)₂:Sb; BaO·TiO₂P₂O₅; and MgWO₄.

47. The device as in claim 26, wherein the fluorescent layer consists essentially of ZnS:Ag and at least one of (Zn,Cd)S:Cu,Al; ZnS:Cu,Al; Zn₂SiO₄:Mn; and (Zn,Mg)₃(PO₄)₂:Mn.

48. A method of adjusting an emission spectrum of a phosphor material, the method comprising:

obtaining a binder material and one or more organic compounds;

generating a binder mixture based on the binder material and the one or more organic compounds, the binder mixture substantially transmits an excitation light and substantially absorbs a portion of the emission spectrum of the phosphor material; and

combining the binder mixture with the phosphor material.

49. The method of claim 48, wherein the one or more organic compounds comprise one or more of Fluorescein, Rhodamine 123, Rhodamine 6G, Rhodamine B, Rose Bengal, Brilliantulsulfoflavine FF, Basic yellow HG, and other organic dyes.

50. The method of claim 48, wherein the binder material comprises an epoxy or a silicon resin.

51. The method of claim 48, wherein the excitation light is at a wavelength less than about 450 nanometers.

52. A method of adjusting an emission spectrum of a phosphor material, the method comprising:

obtaining a binder material and one or more organic compounds;

combining the one or more organic compounds with a solution to produce a first mixture;

combining the phosphor material with the first mixture to produce a second mixture;

generating a binder mixture based on the second mixture and the binder material, the binder mixture substantially transmits an excitation light and substantially absorbs a portion of the emission spectrum of the phosphor material.

53. The method of claim 52, wherein the solution comprises a water-based solution or a solvent-based solution.

54. The method of claim 53, wherein the solvent-based solution
5 comprises acetone or isopropanol alcohol.

55. The method of claim 52, wherein the one or more organic
compounds comprise one or more of Fluorescein, Rhodamine 123,
Rhodamine 6G, Rhodamine B, Rose Bengal, Brilliant sulfoflavine
10 FF, Basic yellow HG, and other organic dyes.

56. The method of claim 52, wherein the binder material
comprises an epoxy or a silicon resin.

15 57. The method of claim 52, wherein the excitation light is at
a wavelength less than about 450 nanometers.

FIG. 1

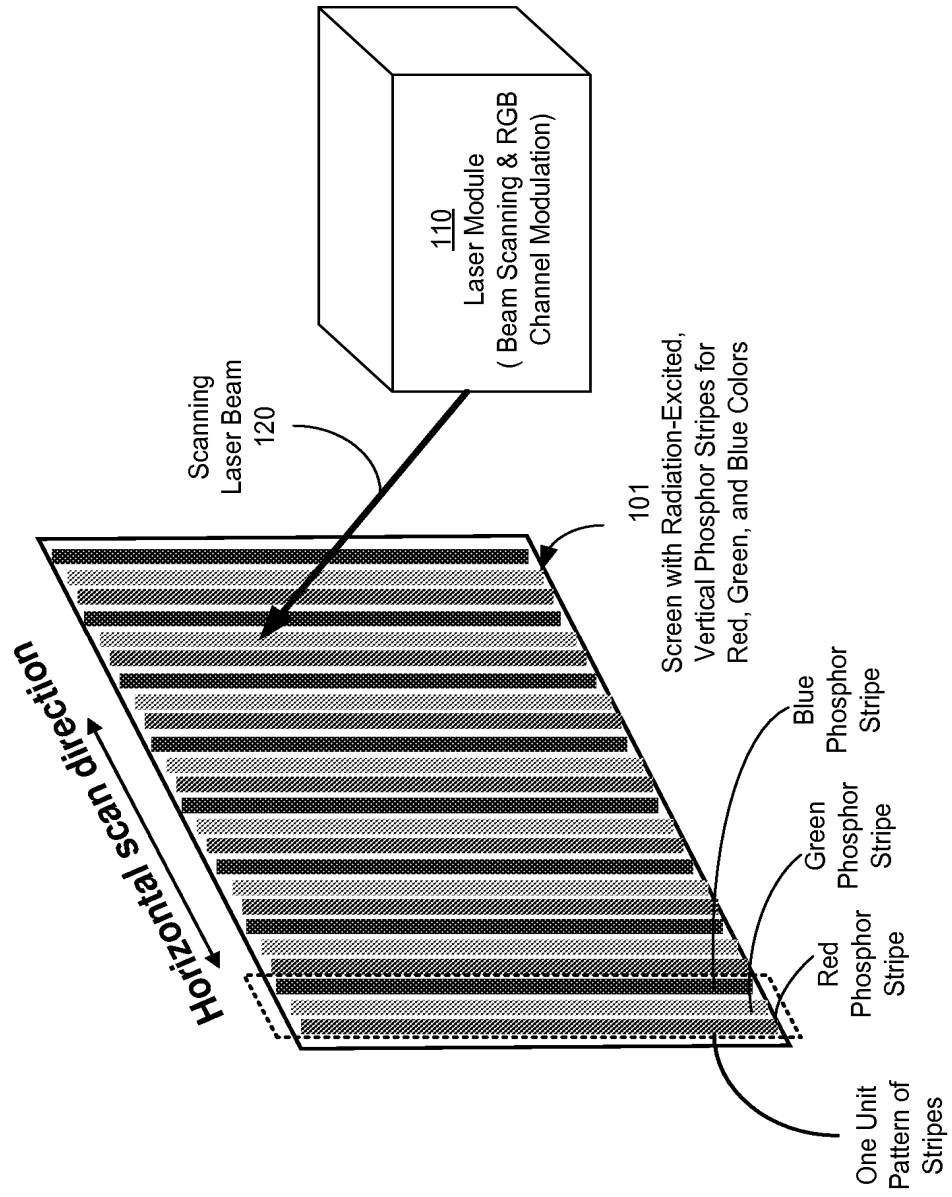


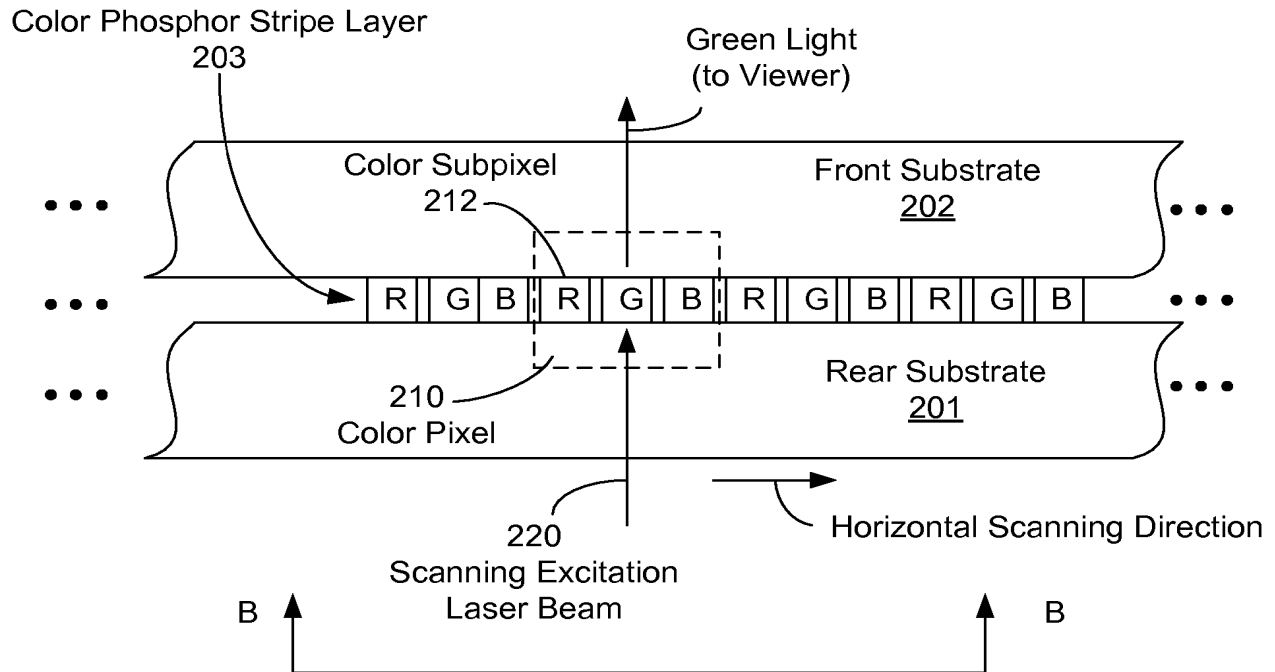
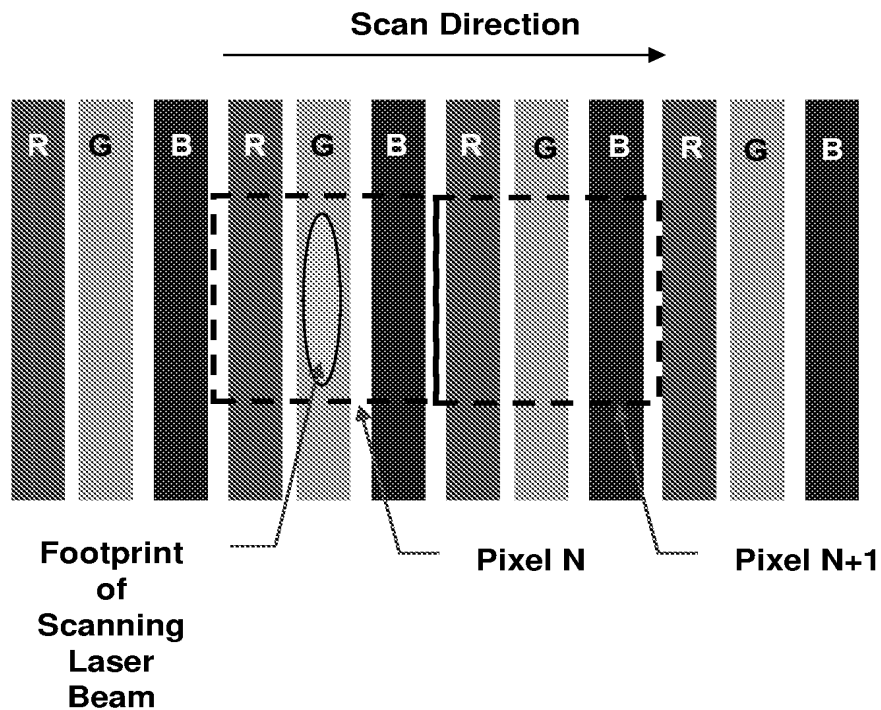
FIG. 2A**FIG. 2B**

FIG. 3

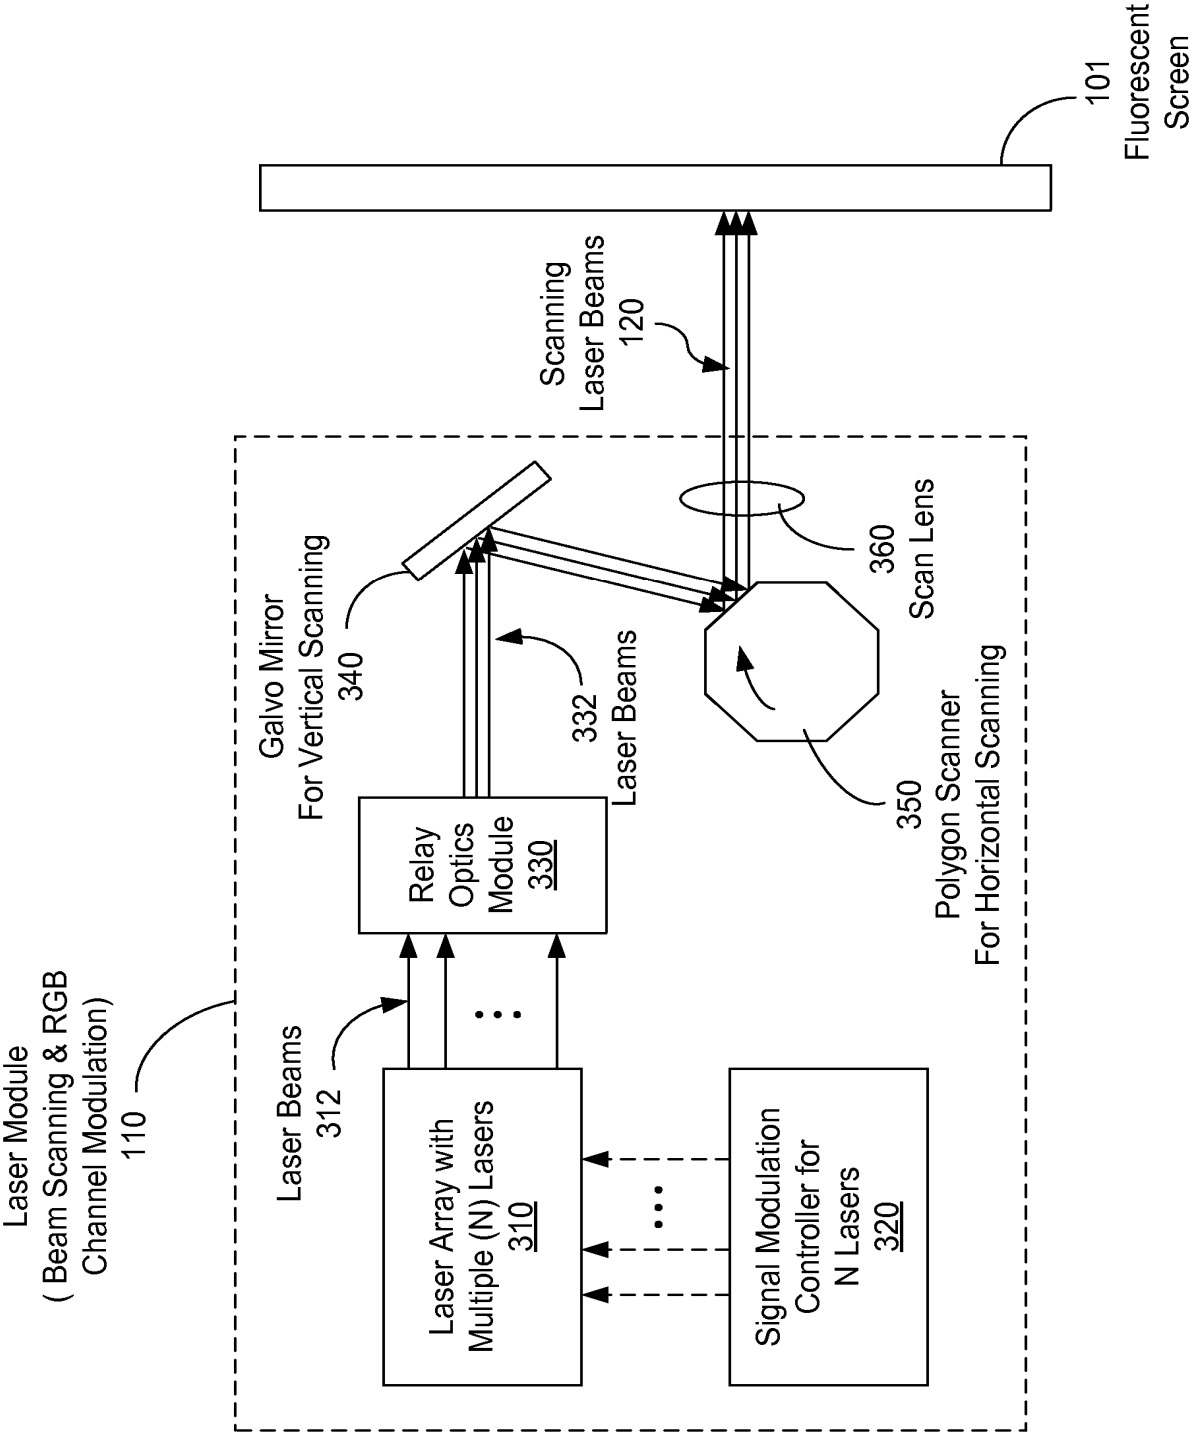


FIG. 4A

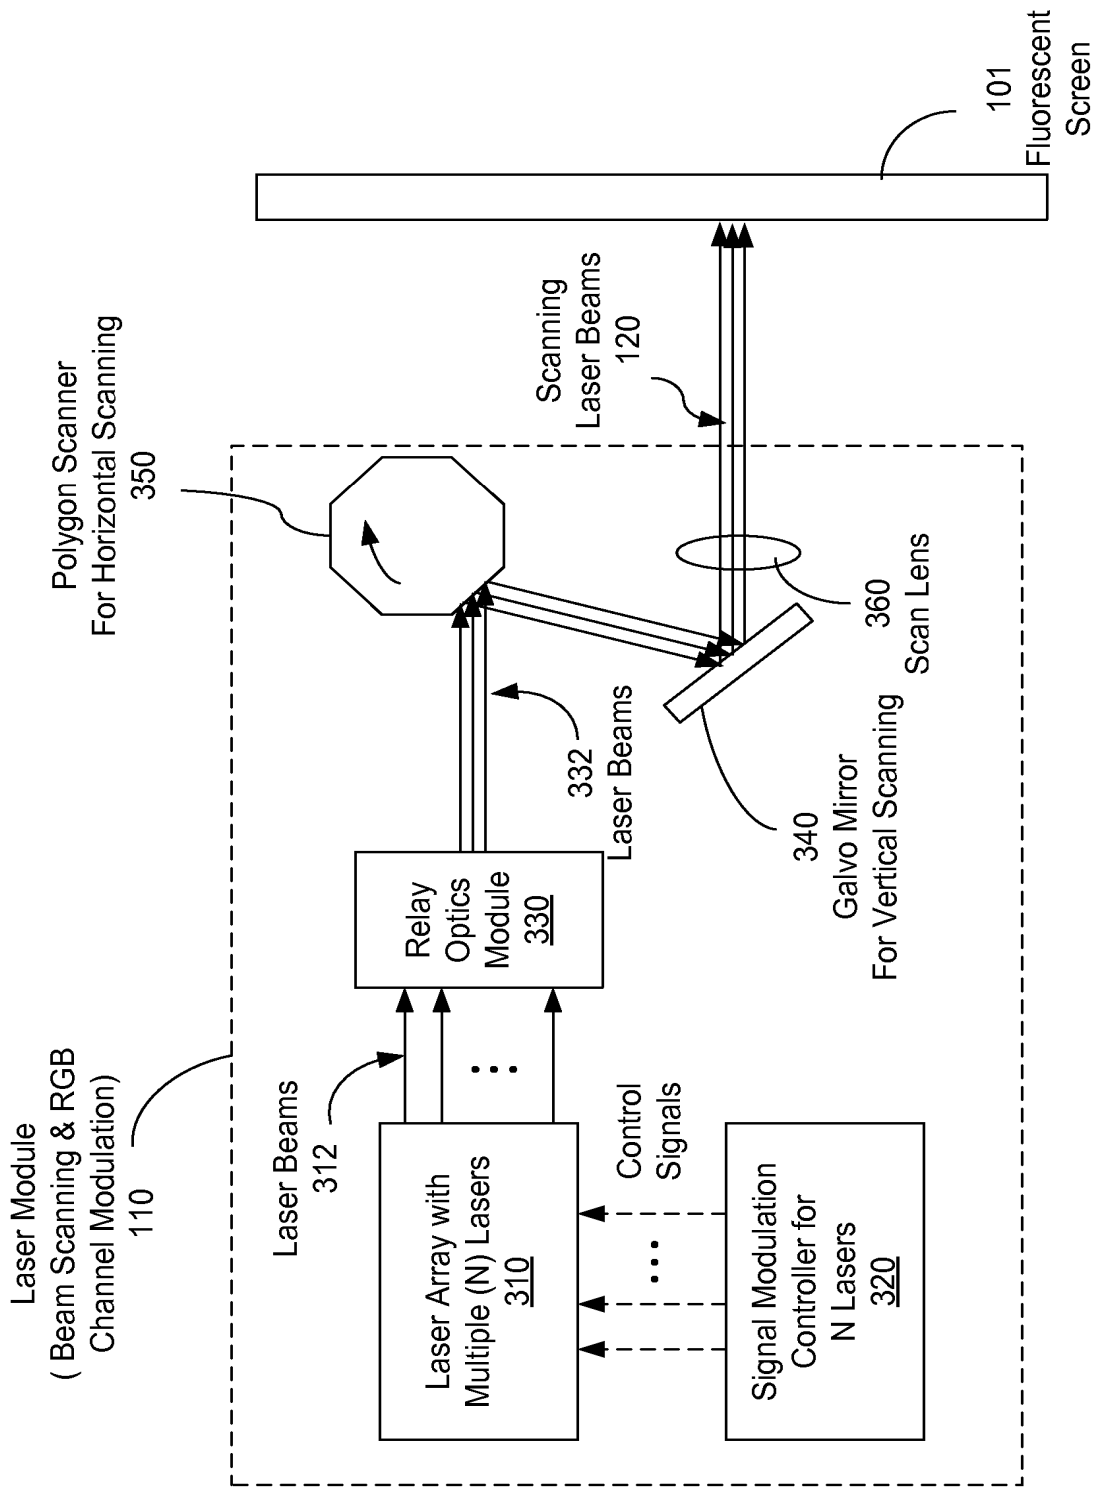


FIG. 4B

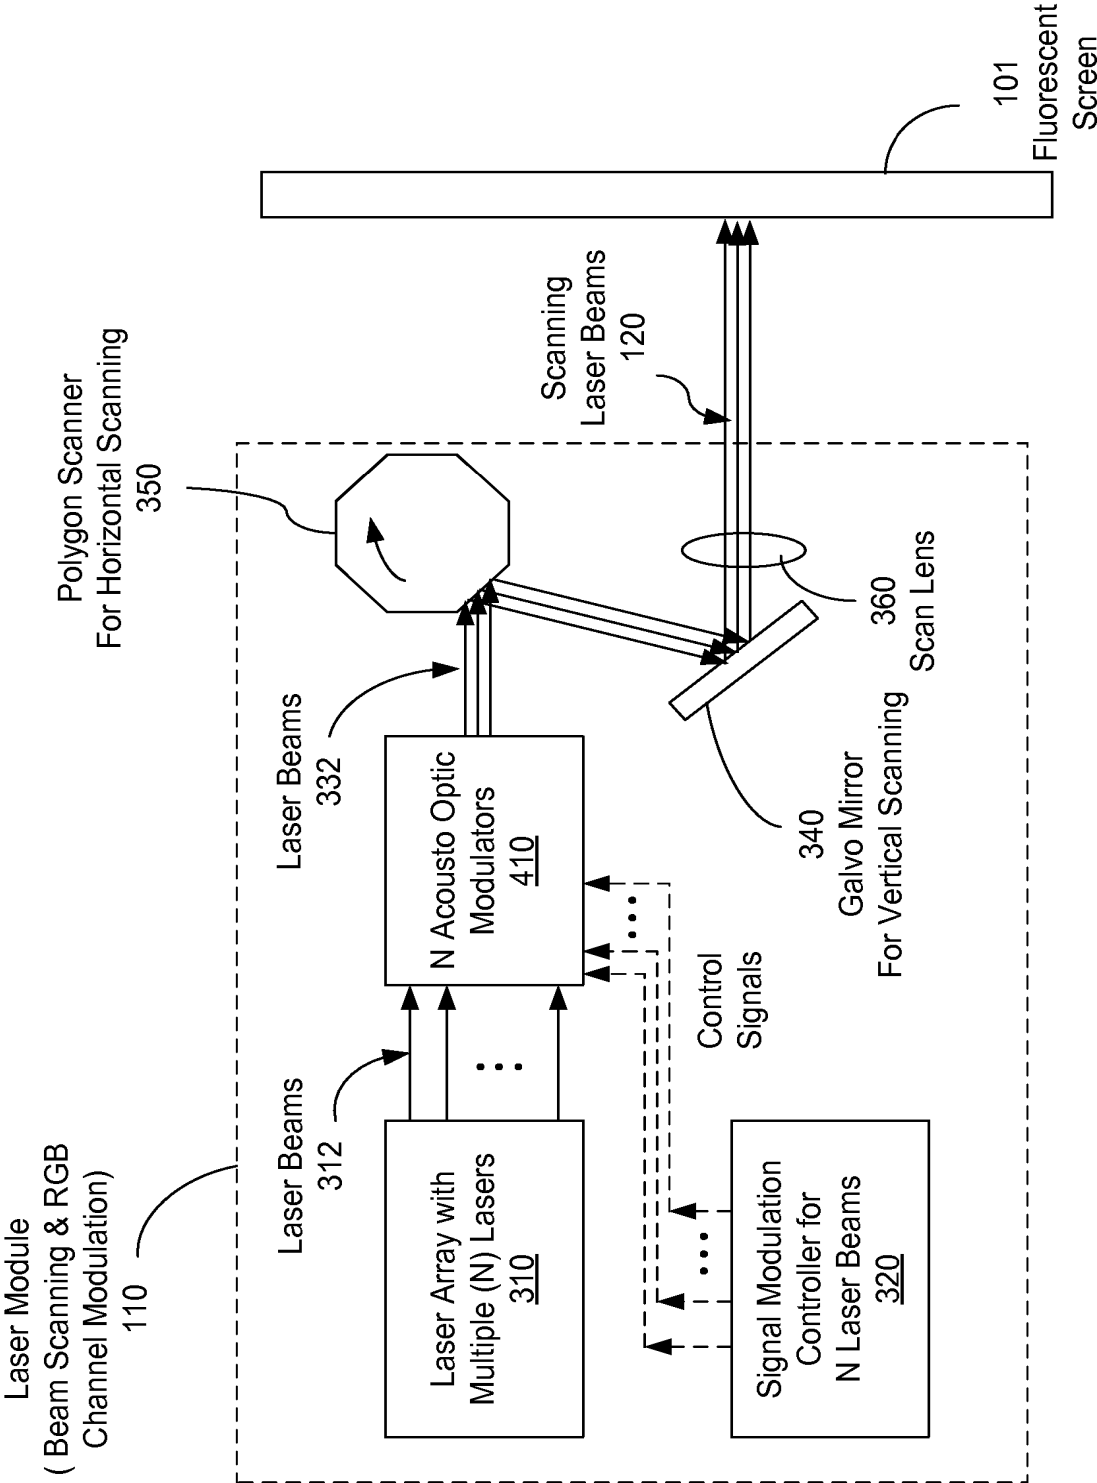


FIG. 5

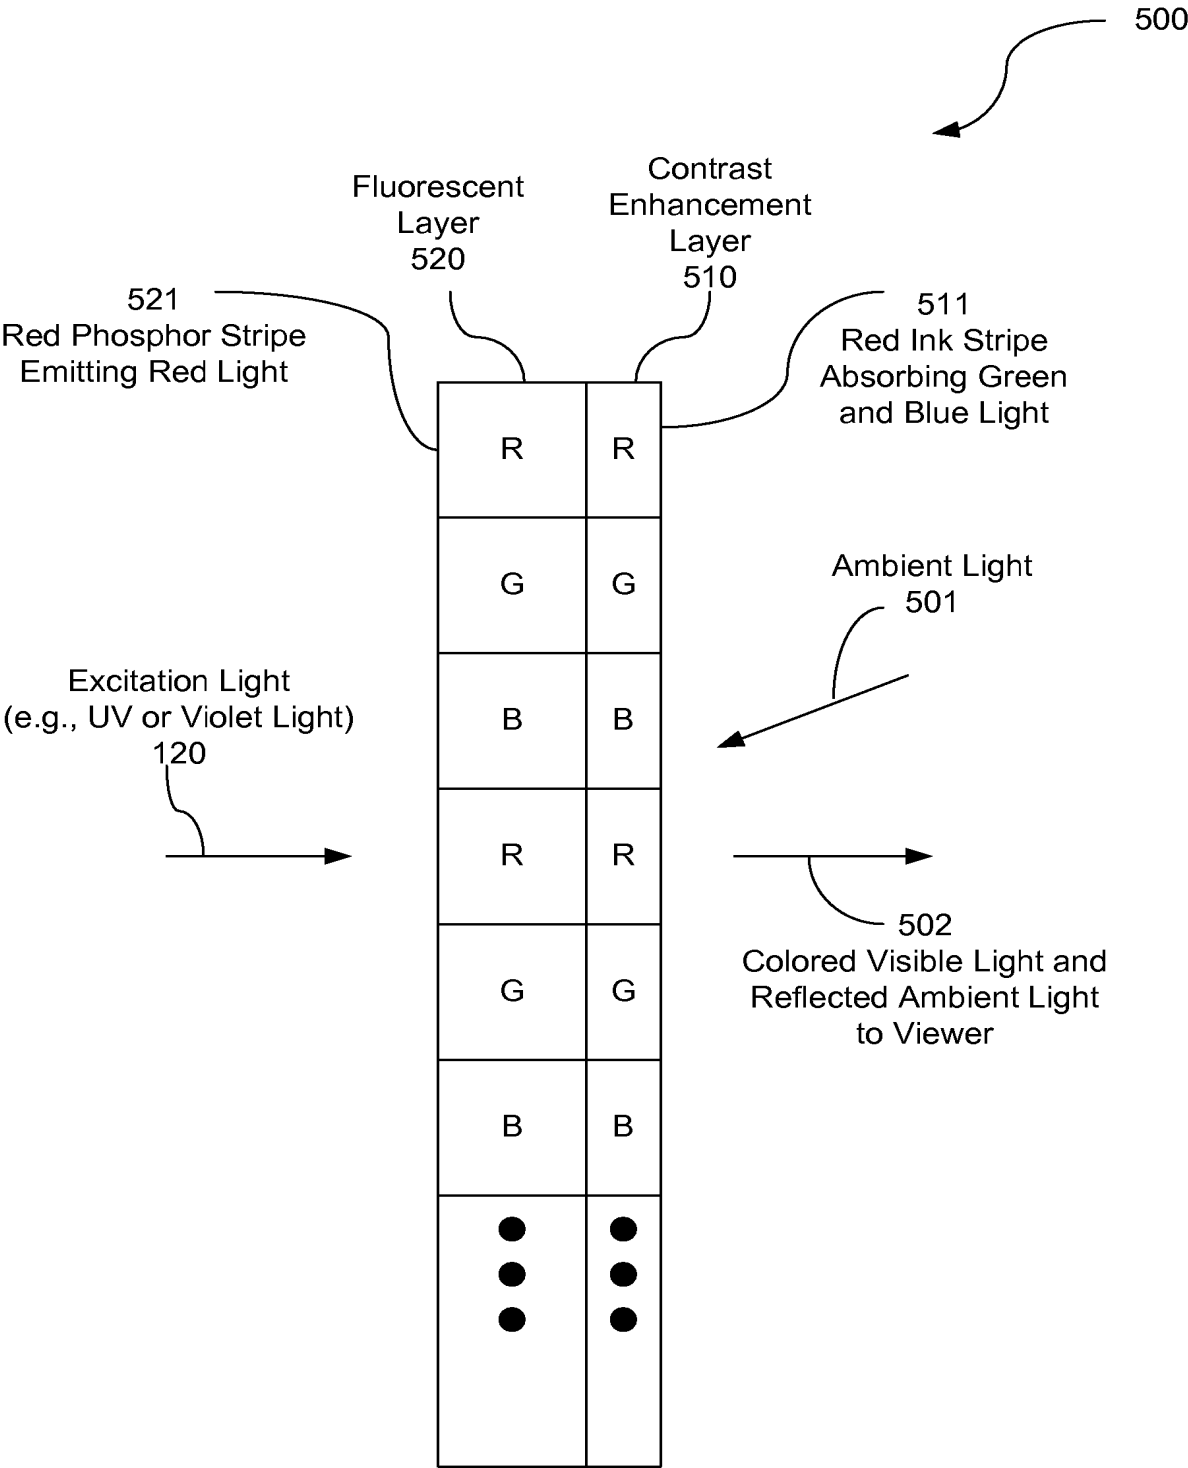
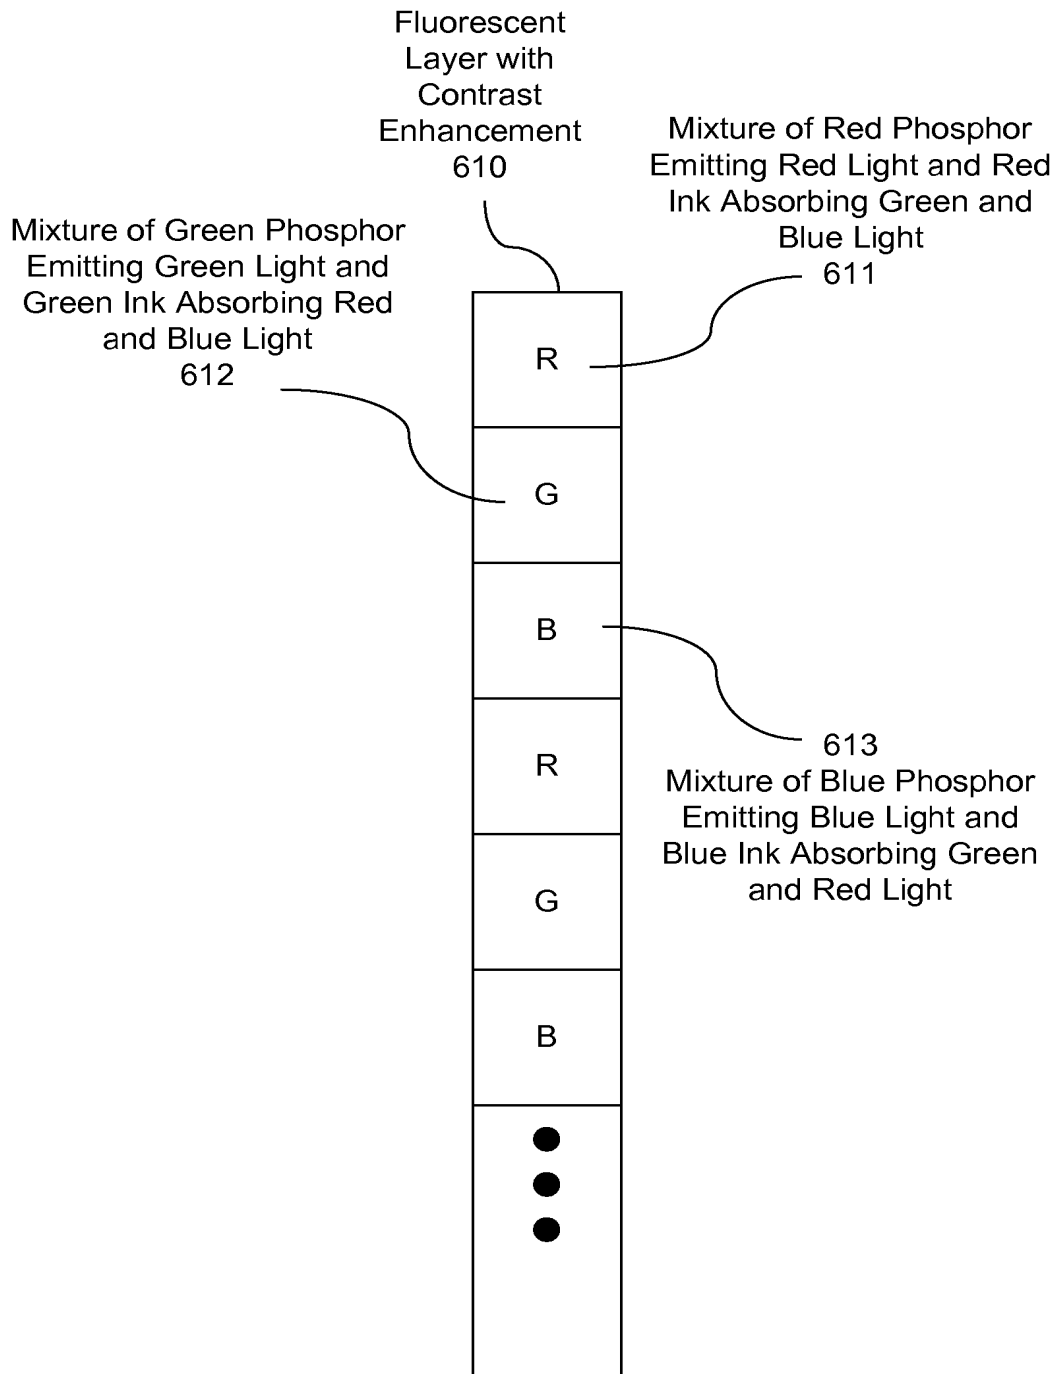


FIG. 6A

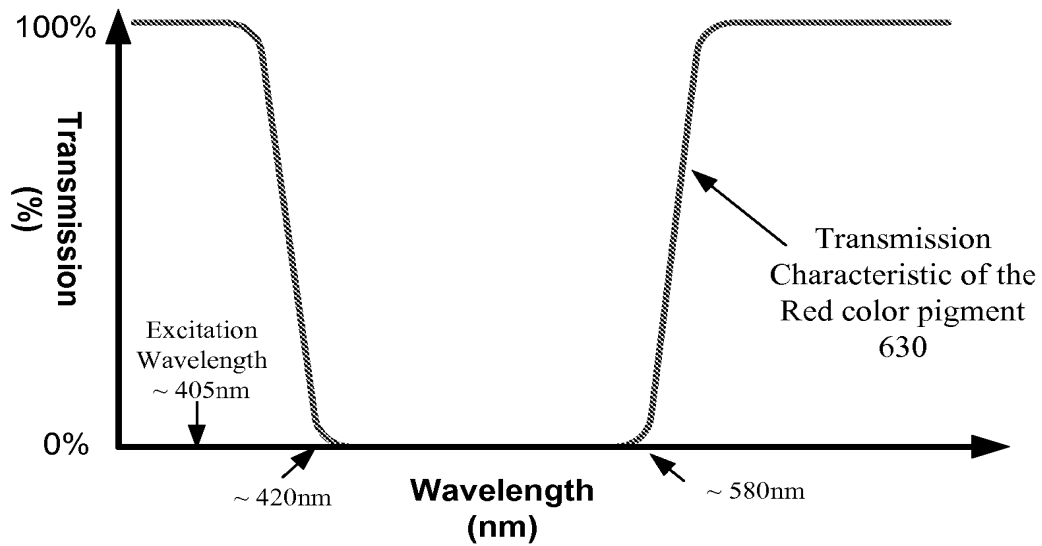
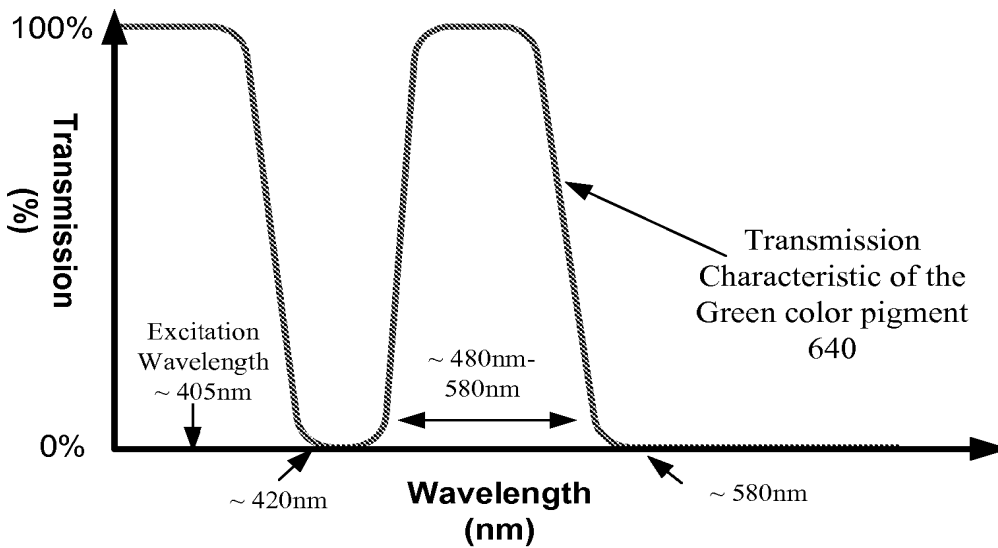
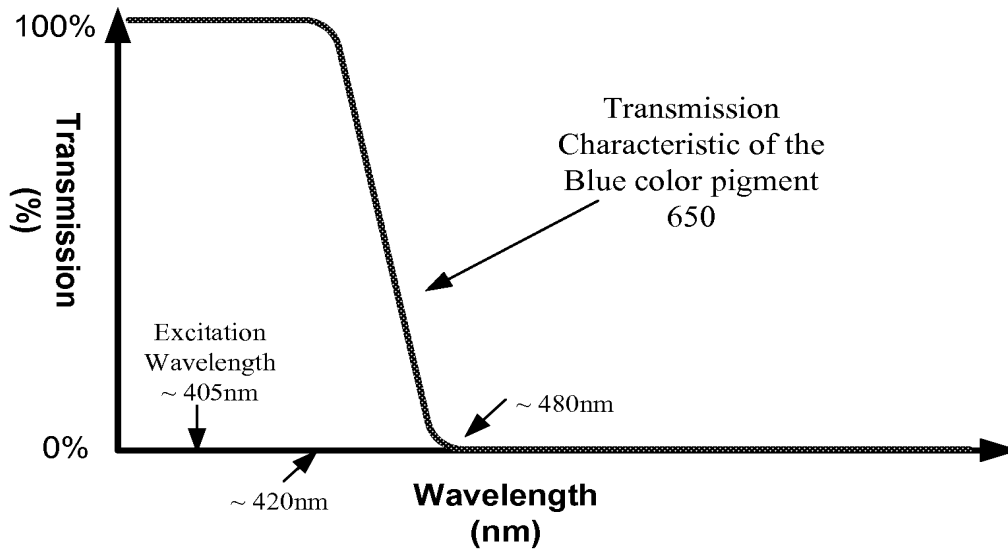
**FIG. 6B****FIG. 6C****FIG. 6D**

FIG. 7

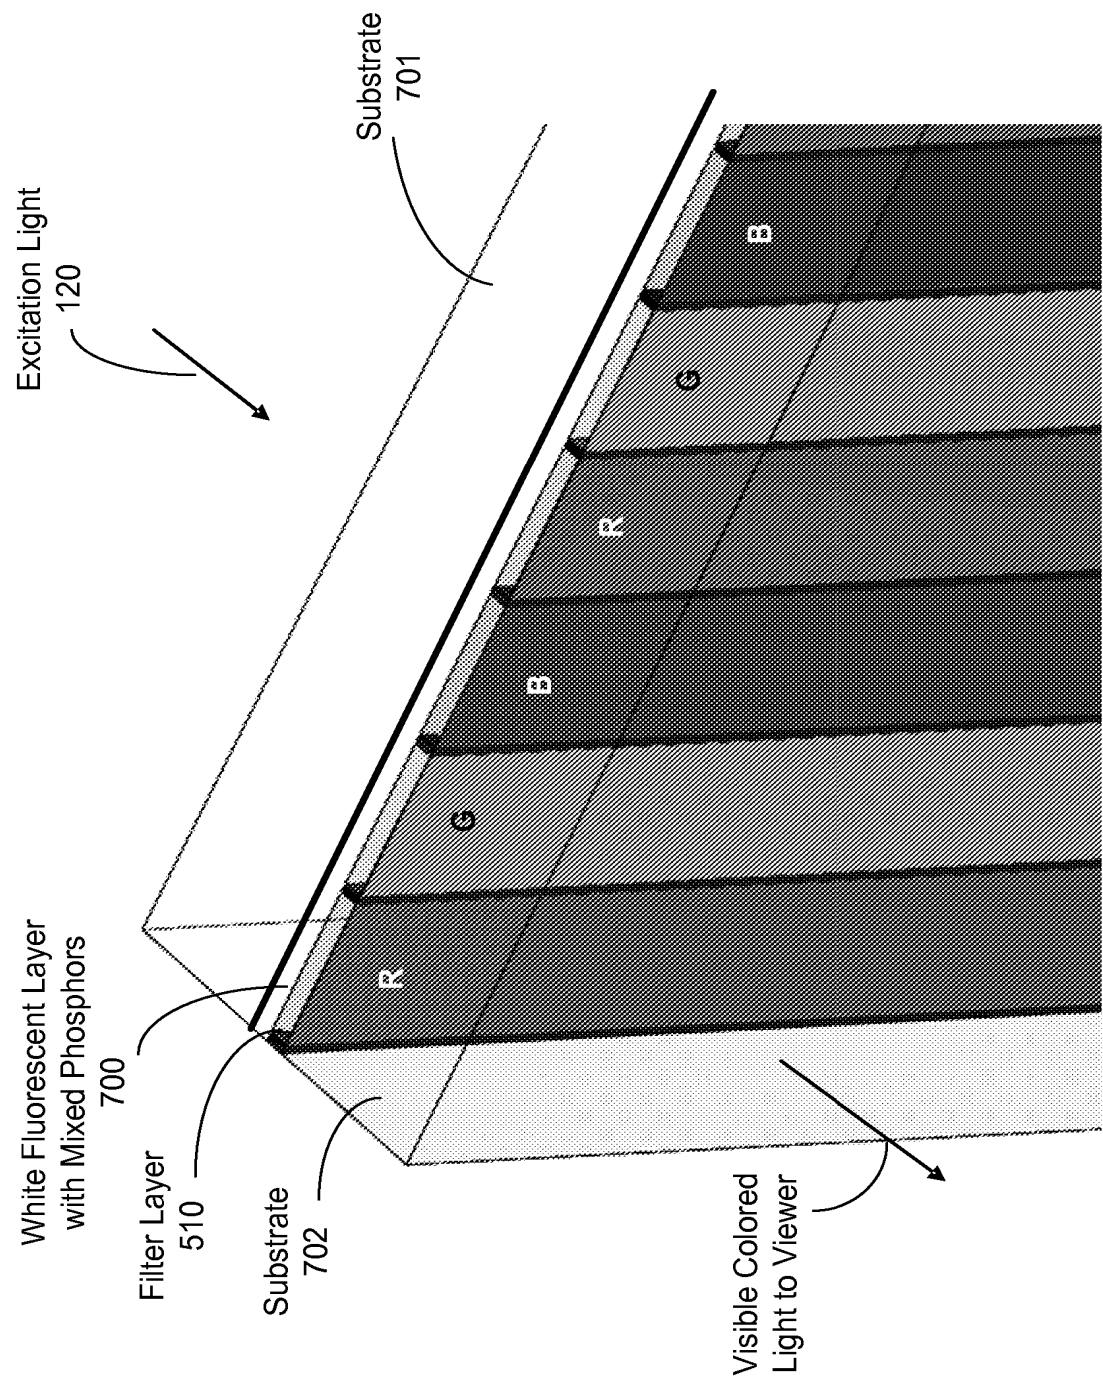


FIG. 8

Organic fluorescent material				
Material	Structure	Color	Fluorescent color	
Rhodamine 110 (CI 55085)		Yellow	Green to yellowish-green	
Basic yellow 14 (CI 45305)		Yellow	Greenish-yellow to yellow	
Eosin (CI 42600)		Red	Yellow to orange	
Rhodamine 6G (CI 45010)		Red	Yellow to orange	
Rhodamine B (CI 45085)		Pink	Orange to red	

Fluorophore	Fluorophore Name	Fluorophore Name
DMT	Disodium Fluorescein	Uranin
p-Terphenyl	Fluorol 555	Fluorol 7GA
BFED-355	Rhodamine 560 Chloride	Rhodamine 110
p-Quaterphenyl	Rhodamine 560 Chloride	Rhodamine 6G
BBQ	Rhodamine 610	Rhodamine B
LD 350	Klon Red 620	SulfoRhodamine B
Silicone 420	Rhodamine 640 Perchlorate	Rhodamine 101
Coumarin 440	SulfoRhodamine 640	SulfoRhodamine 101
Coumarin 450	LDS 508	Pyridine 1
Coumarin 456	LDS 722	Pyridine 2
Coumarin 460	LDS 730	Styryl 6
Coumarin 461	LDS 750	Styryl 7*
LD 465	LDS 751	Styryl 8*
Coumarin 478	LDS 798	Styryl 11
Coumarin 480	LDS 821	Styryl 69M
Coumarin 481	Phenoxazone 660	Phenoxazone 9
Coumarin 485	Grey/Violet 670 Perchlorate	Kresyl Violet
Coumarin 490	Nile Blue 500 Perchlorate	Nile Blue
LD 490	LD 530 Perchlorate	Oxazine 4
Coumarin 503	LD 700 Perchlorate	Rhodamine 700
Coumarin 504	Oxazine 720 Perchlorate	Oxazine 170
Coumarin 515	Oxazine 725 Perchlorate	Oxazine 1
Coumarin 519	HDC Iodide	Hexacyanin 2
Coumarin 521	LD 900	Rhodamine 800
Coumarin 523	HTC Iodide	Hexacyanin 3
Coumarin 535	LDS 925	Styryl 12
Coumarin 540	IR-25	Dye 26
Coumarin 540A	DMOTC	Methyl DMT

FIG. 9

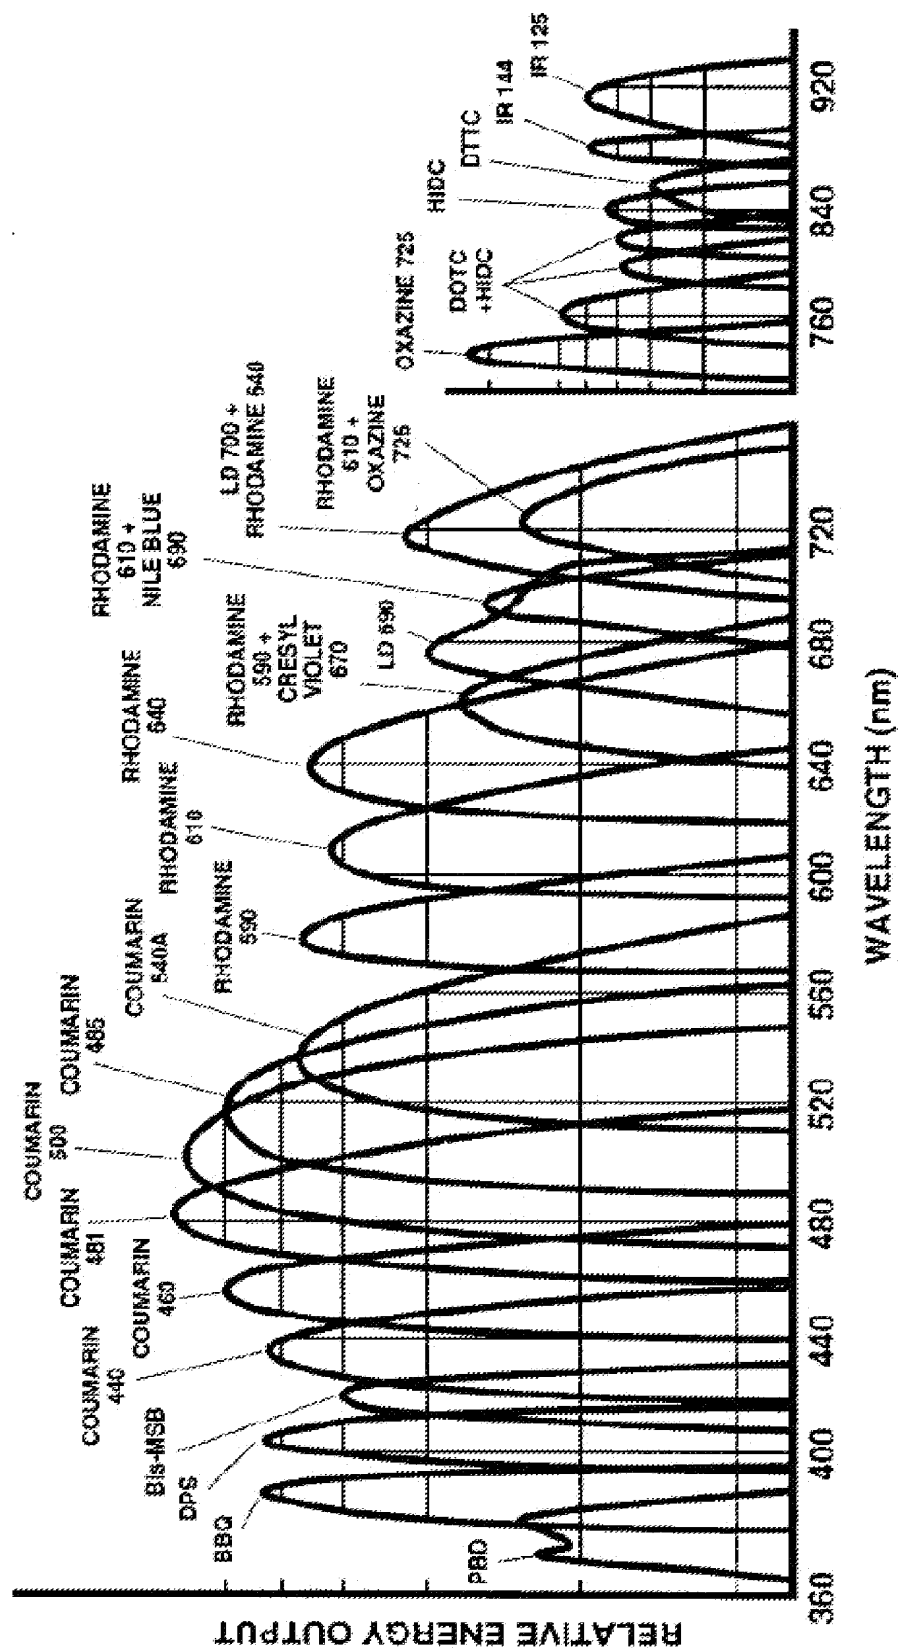


FIG. 10

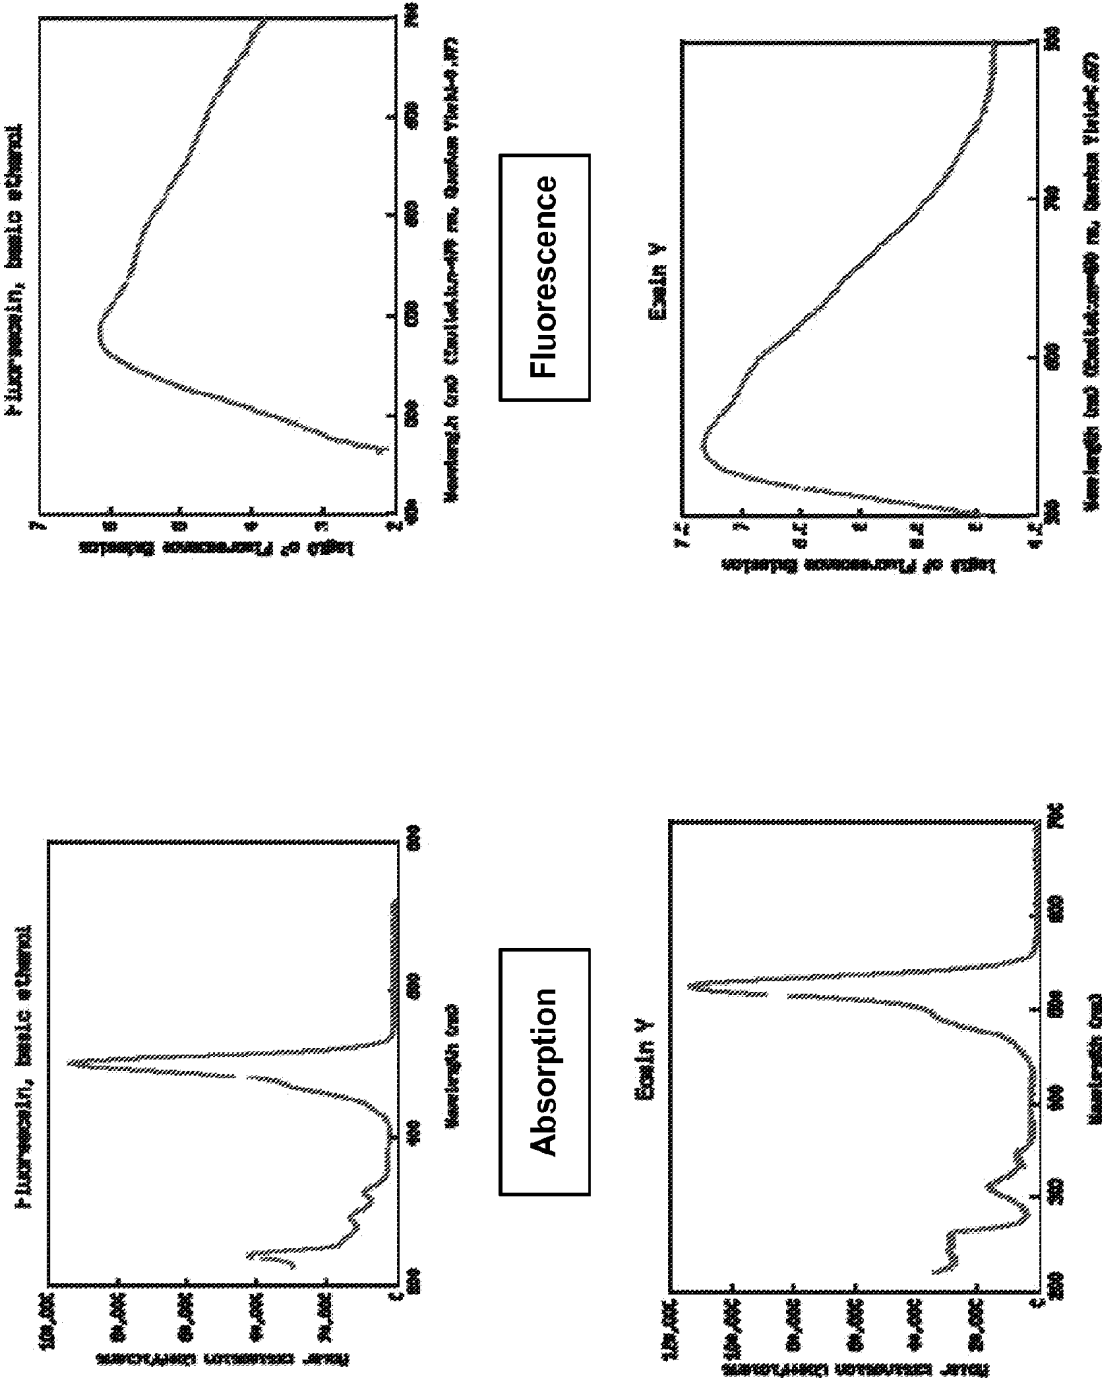


FIG. 11

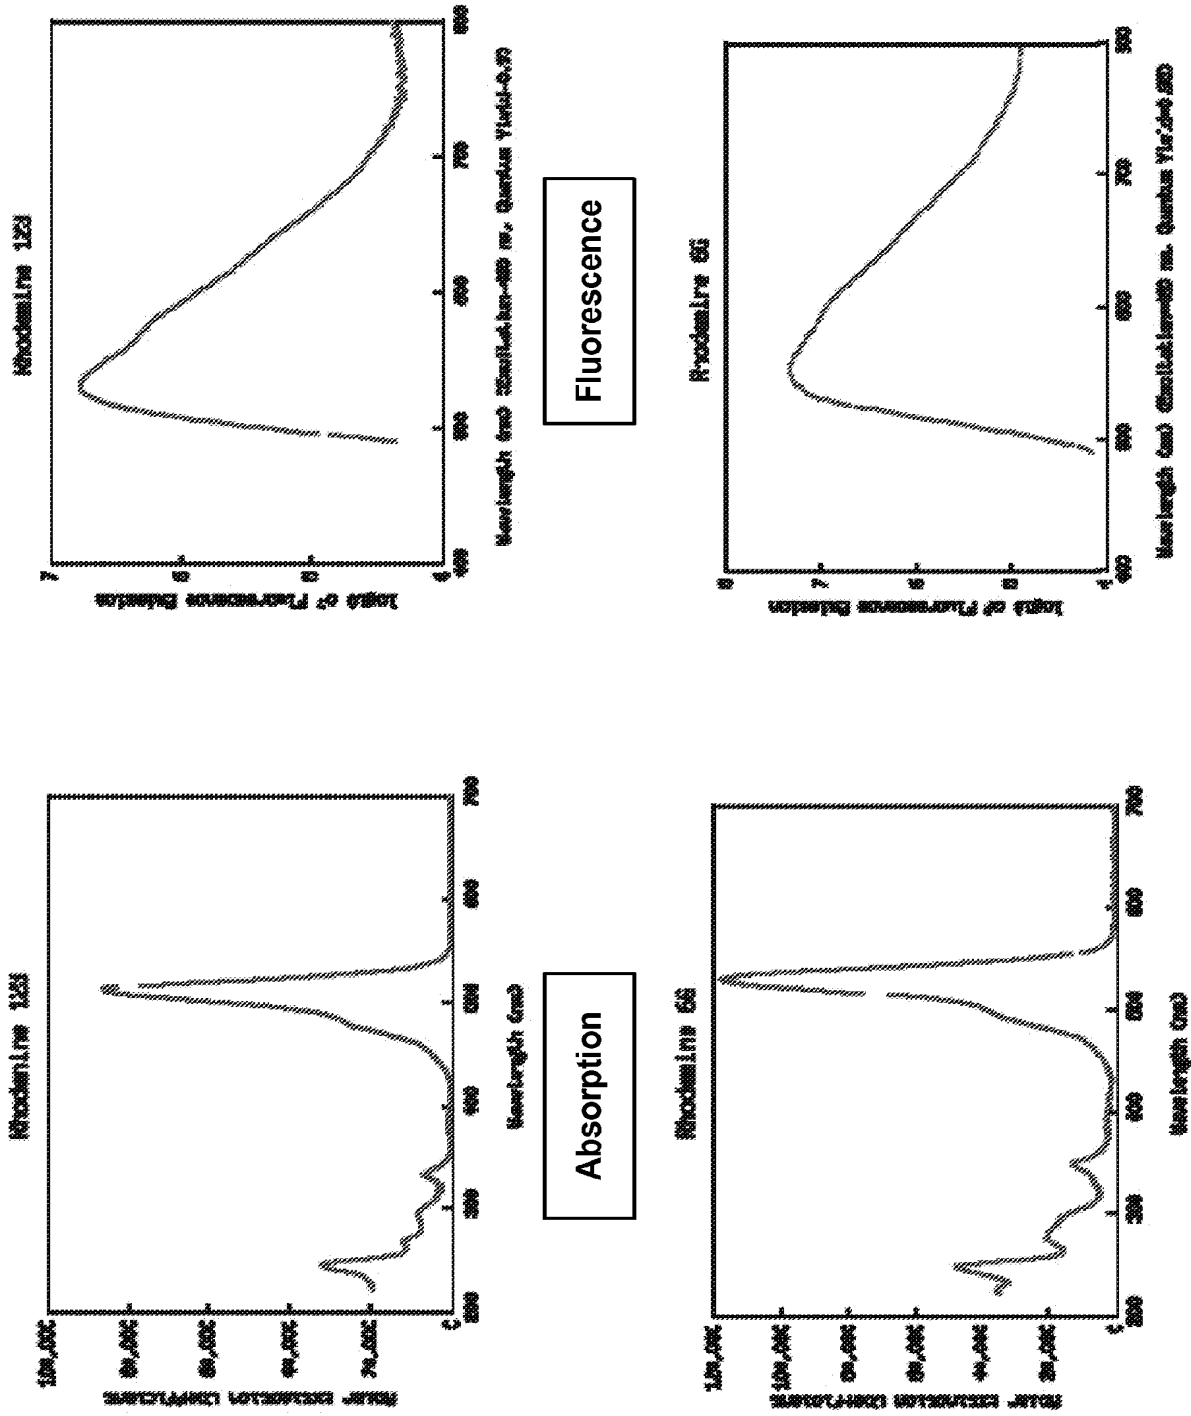


FIG. 12

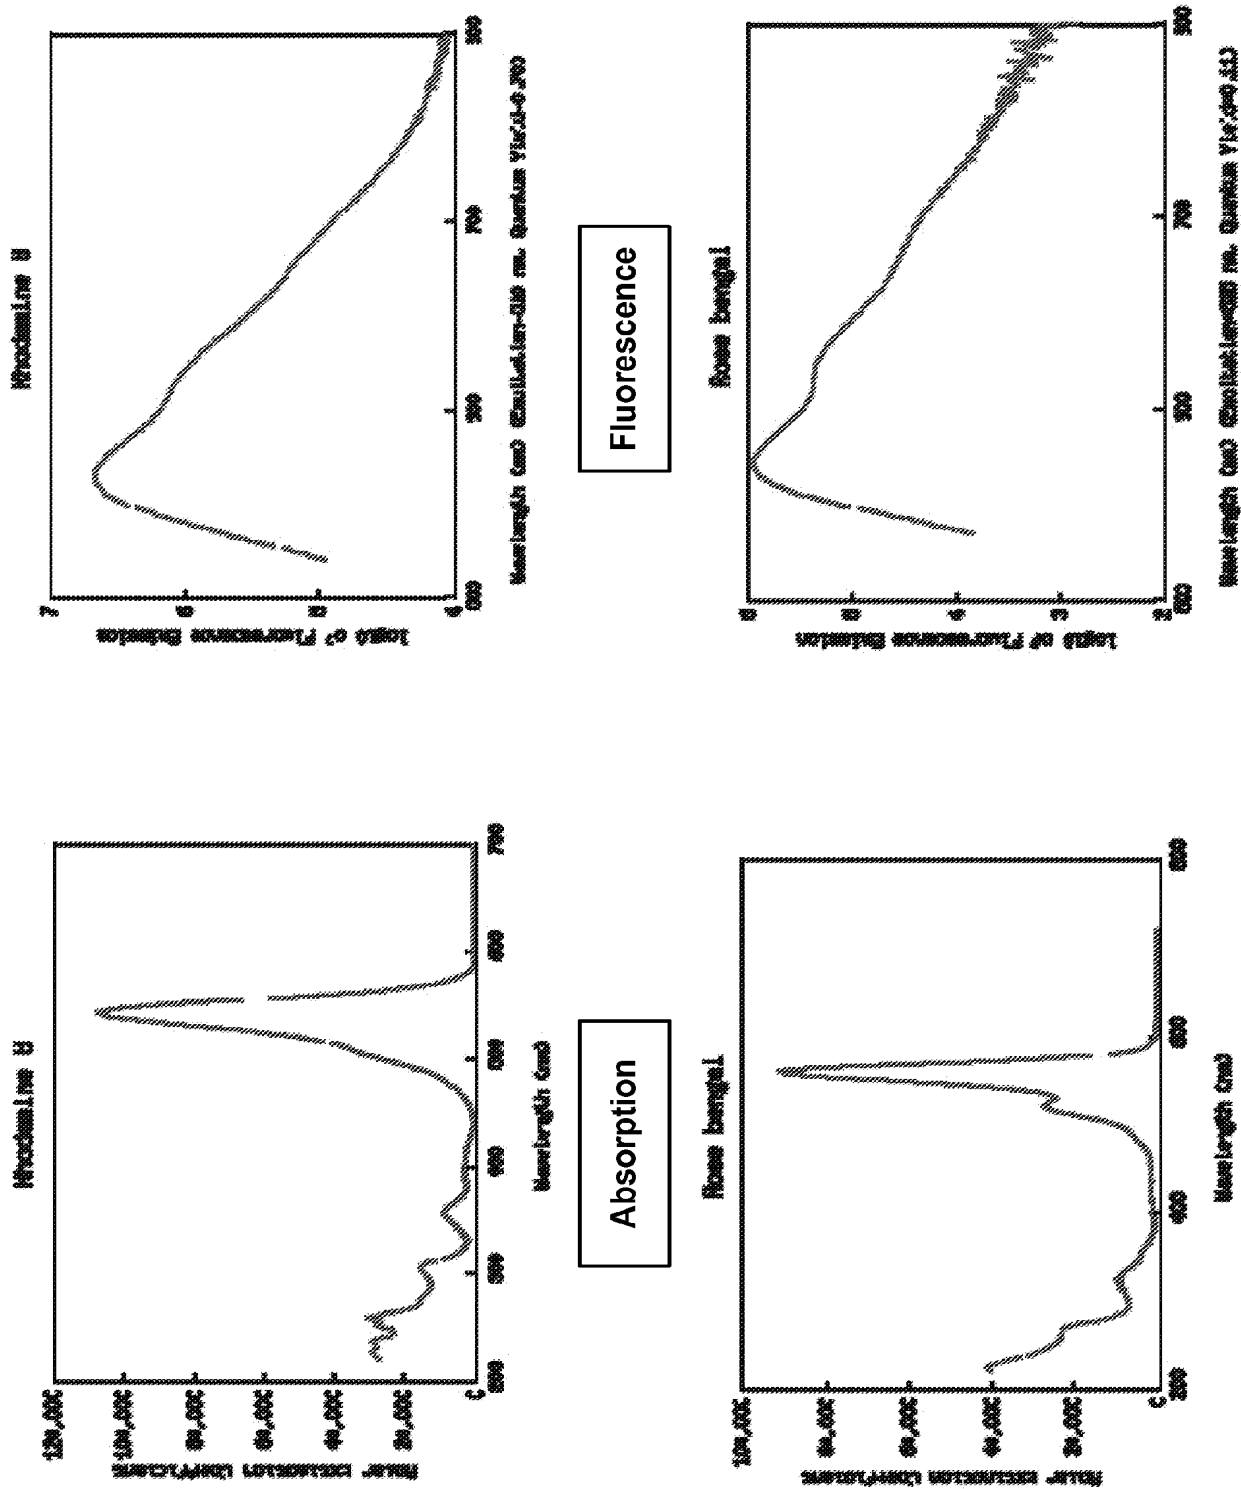


FIG. 13

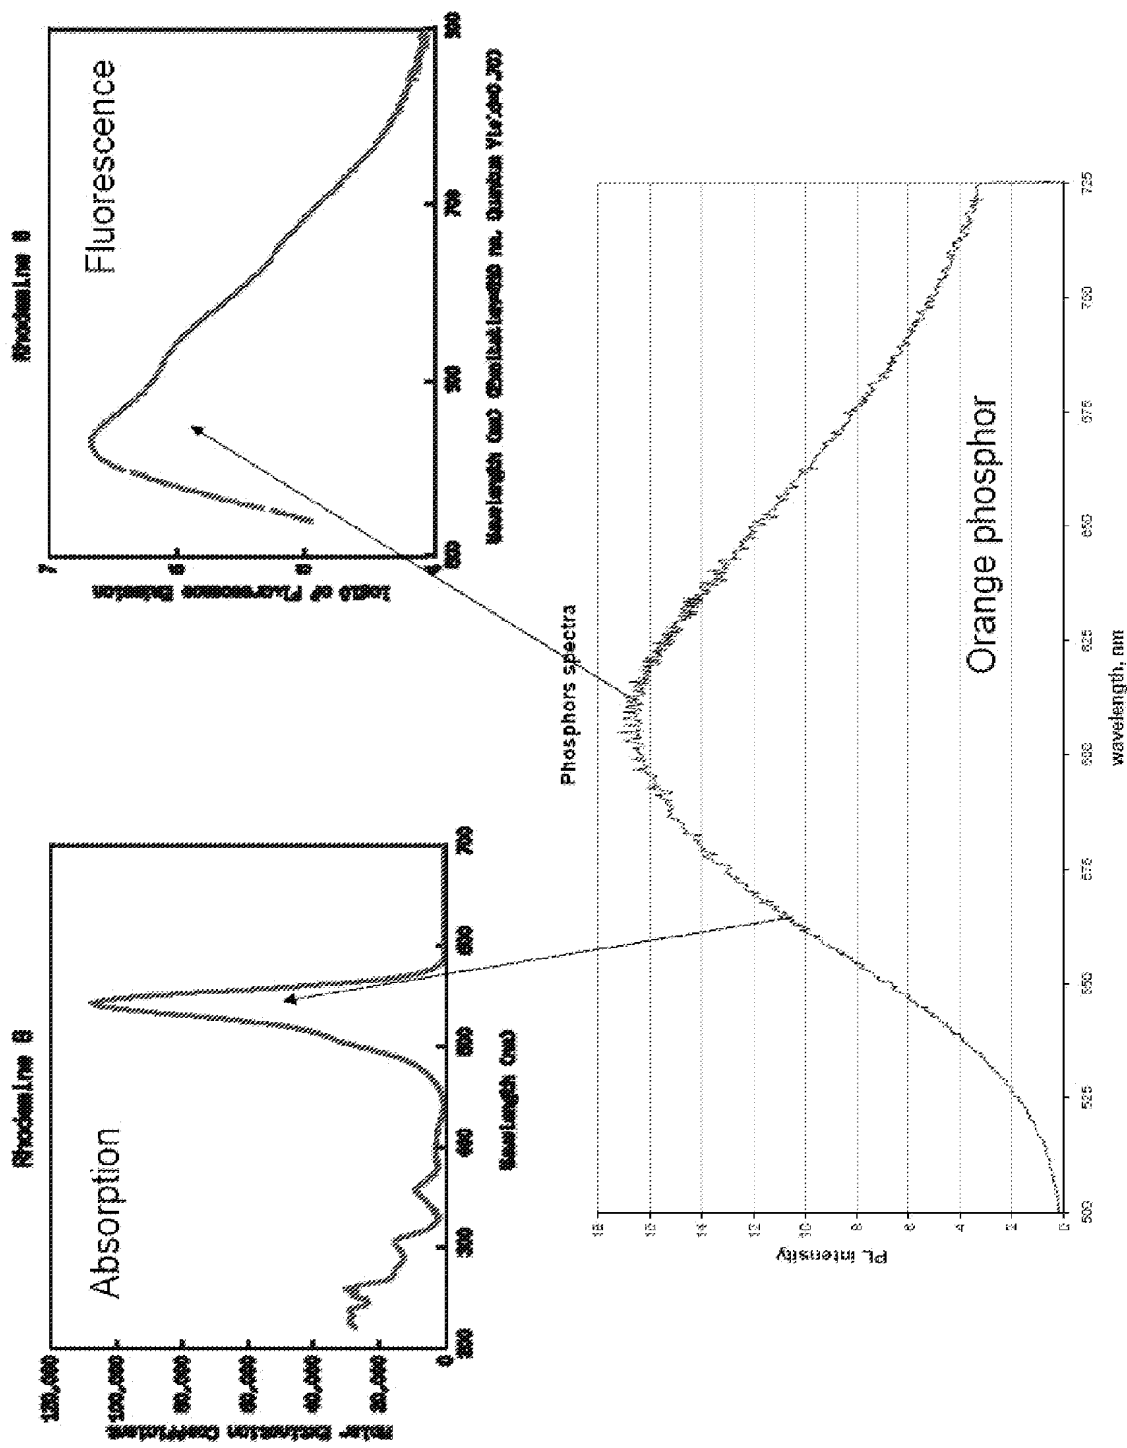


FIG. 14

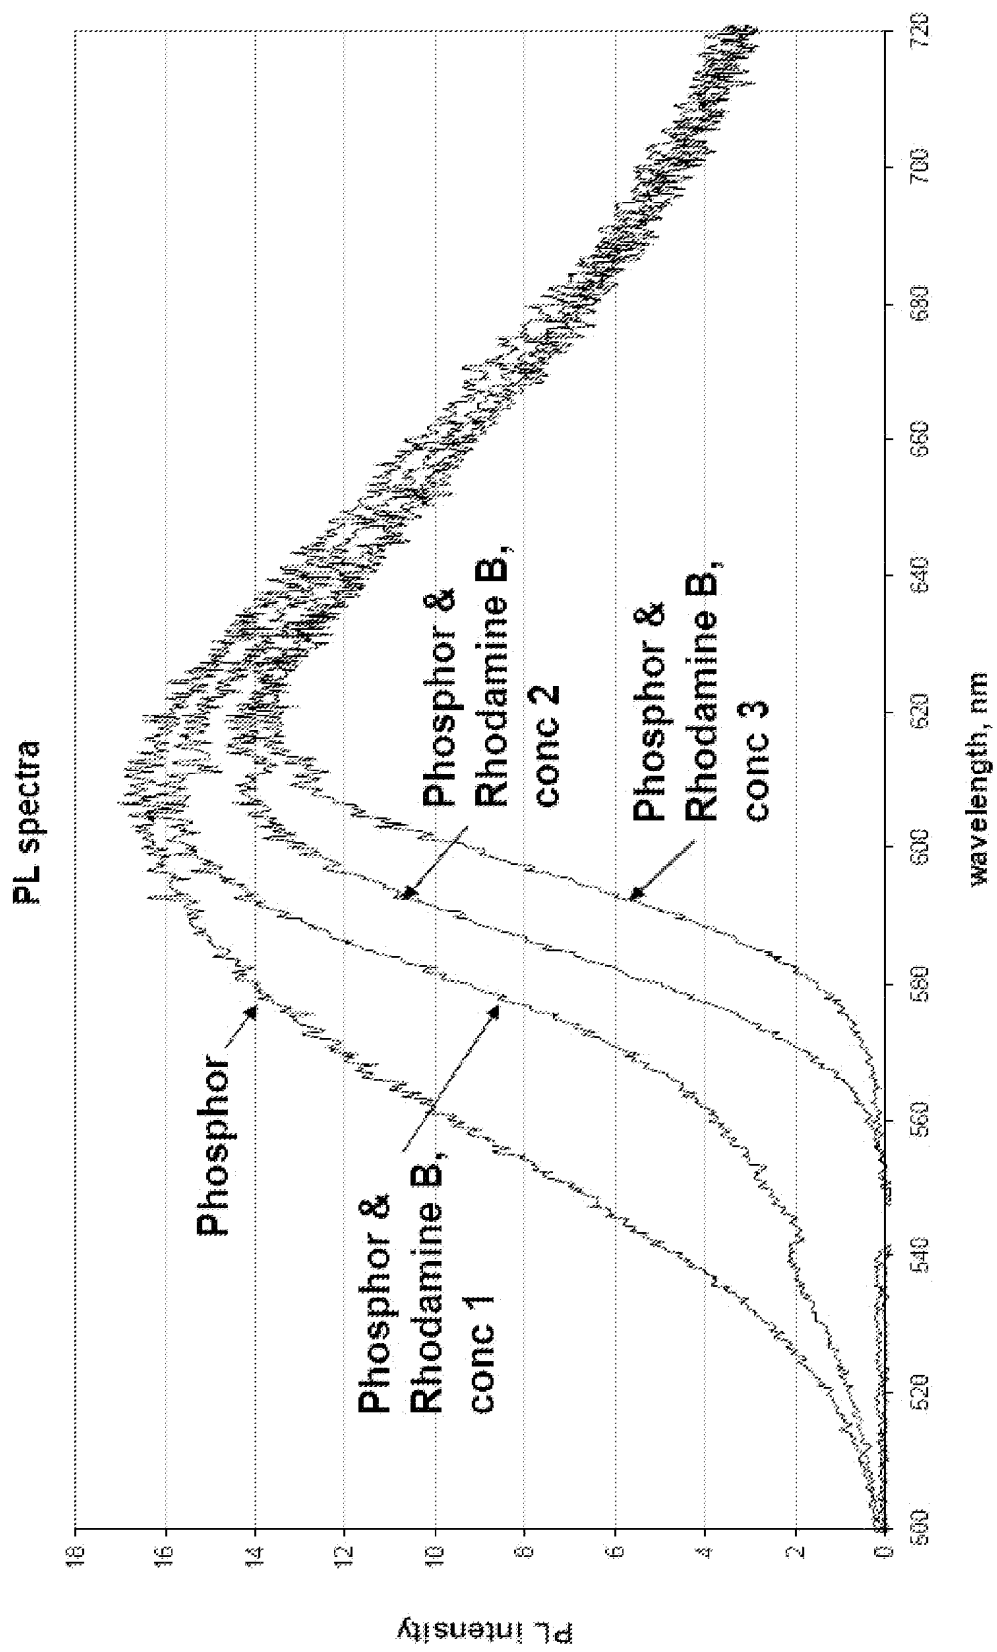


FIG. 15

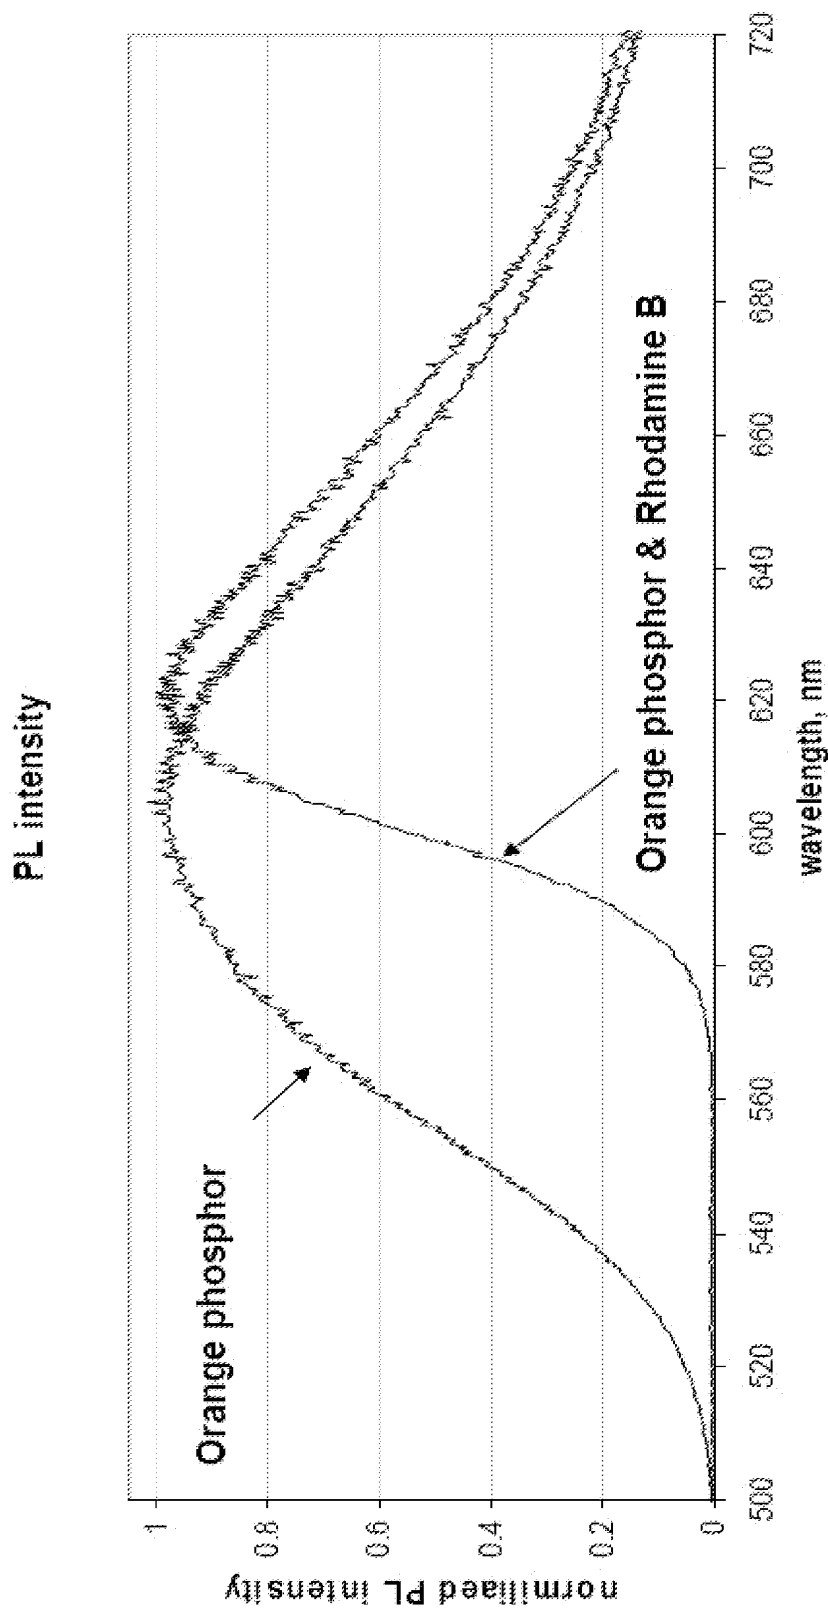


FIG. 16



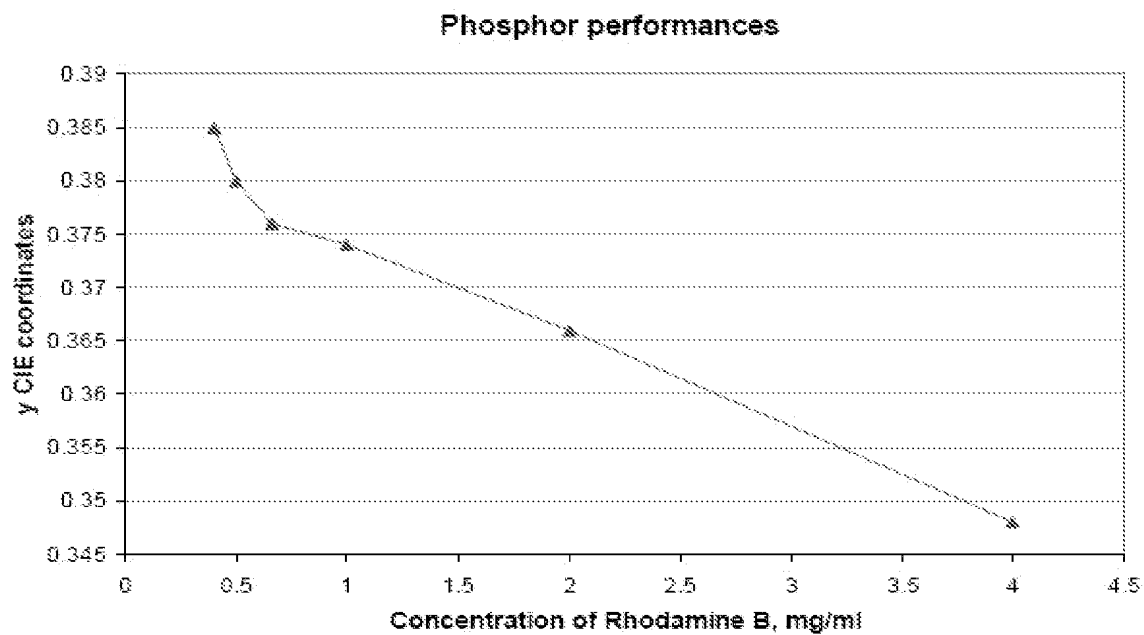
FIG. 17A**FIG. 17B**

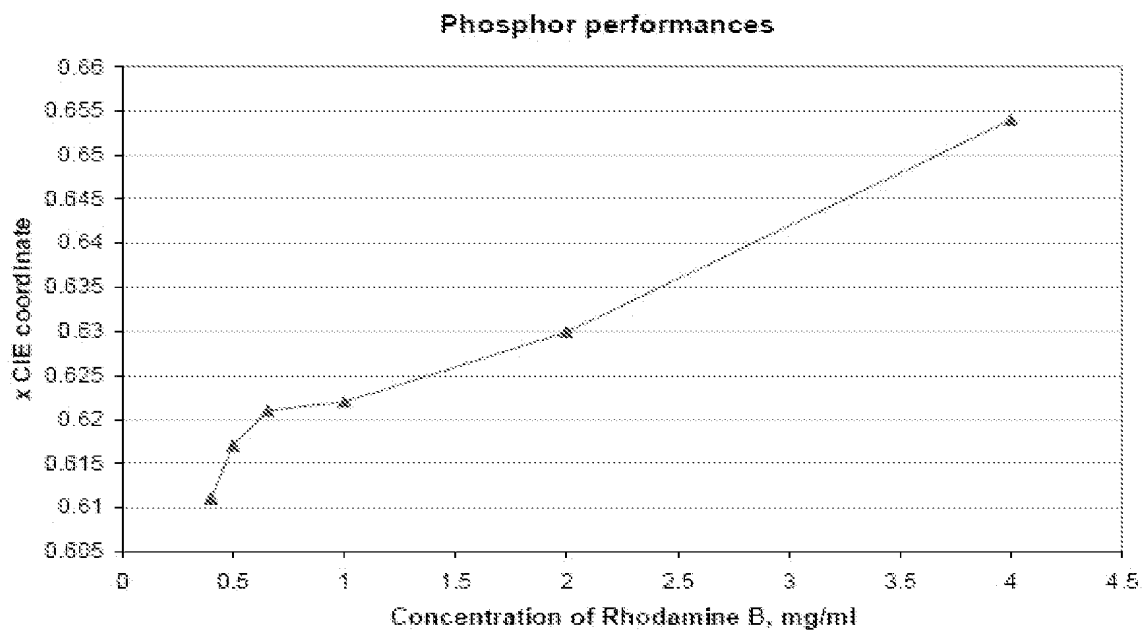FIG. 18



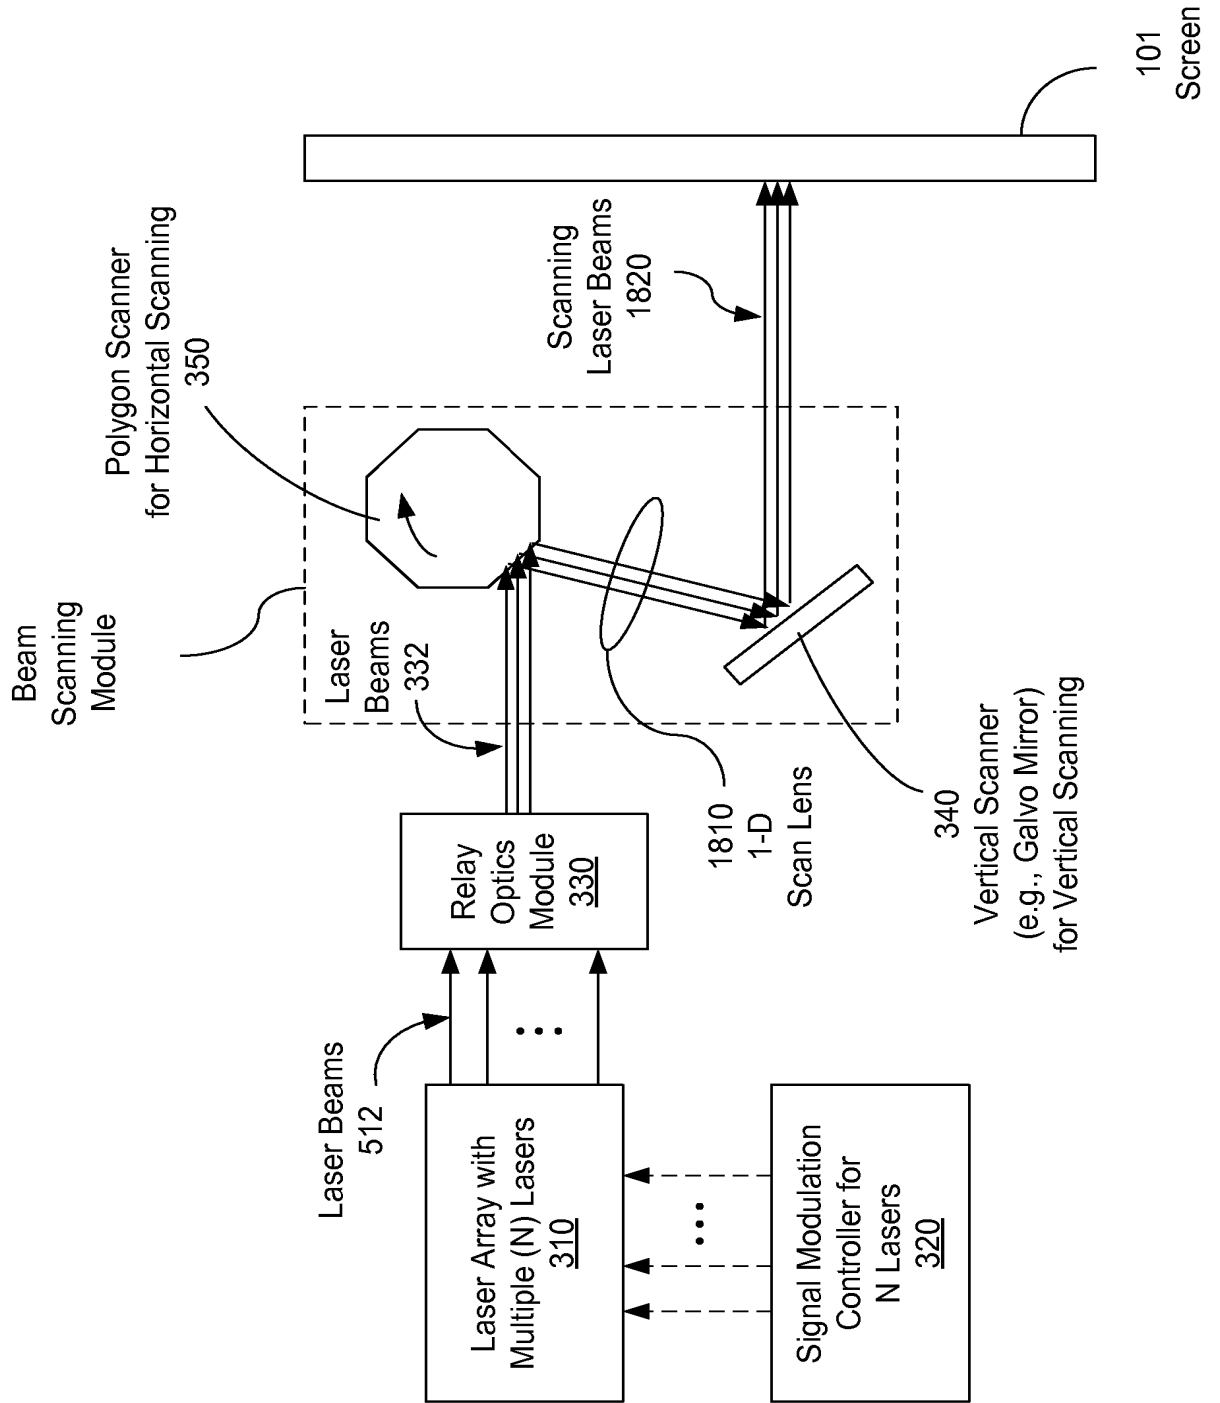(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 November 2007 (15.11.2007)

PCT

(10) International Publication Number
WO 2007/131195 A3

(51) International Patent Classification:
G02B 26/08 (2006.01)

(21) International Application Number:
PCT/US2007/068286

(22) International Filing Date: 4 May 2007 (04.05.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/798,415	5 May 2006 (05.05.2006)	US
60/799,316	9 May 2006 (09.05.2006)	US
11/510,495	24 August 2006 (24.08.2006)	US
11/514,720	31 August 2006 (31.08.2006)	US
11/553,971	27 October 2006 (27.10.2006)	US
60/869,713	12 December 2006 (12.12.2006)	US
60/890,174	15 February 2007 (15.02.2007)	US

(71) Applicant (for all designated States except US): **SPUD-NIK, INC.** [US/US]; 135 Riviera Drive, Apt. 435, Los Gatos, California 95032 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BUKESOV, Sergey A.** [RU/US]; 248 Pine Cone Strand, Acton, Massachusetts

01718 (US). **HAJJAR, Roger A.** [US/US]; 1050 Camino Ricardo, San Jose, California 95125 (US).

(74) Agents: **AI, Bing** et al.; Fish & Richardson P.C., P.O. Box 1022, Minneapolis, Minnesota 55440-1022 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

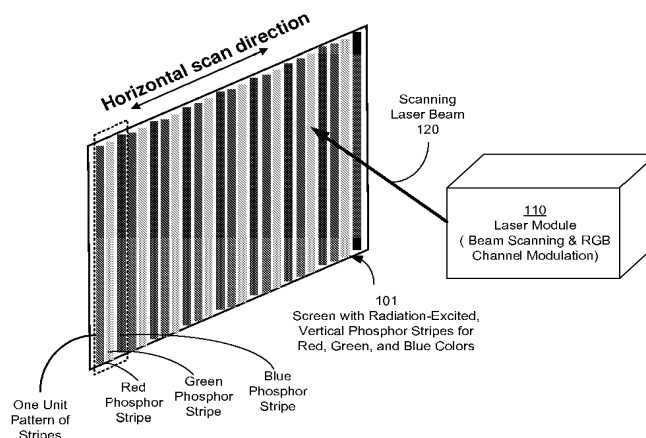
(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: PHOSPHOR COMPOSITIONS AND OTHER FLUORESCENT MATERIALS FOR DISPLAY SYSTEMS AND DEVICES



(57) Abstract: Various phosphor compositions and organic compounds can be used in fluorescent layers for scanning beam displays. In general, one aspect of the subject matter described in this specification can be embodied in a display device having a fluorescent layer that absorbs an excitation light at a single wavelength and emits visible light. The fluorescent layer includes a plurality of parallel fluorescent stripes. At least three adjacent fluorescent stripes are made of three different fluorescent materials, which include a first fluorescent material that absorbs the excitation light and emits light of a first color, a second fluorescent material that absorbs the excitation light and emits light of a second color, and a third fluorescent material that absorbs the excitation light and emits light of a third color.



WO 2007/131195 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:

8 May 2008

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US07/68286

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - G03D 21/00 (2007.10) USPC - 353/122 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8) - B42C 9/00; G03D 21/00; H01J 29/80; H04N 9/31 (2007.10) USPC - 313/402; 353/122; 412/8 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PatBase, Google Scholar, Google Patent, Google		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,473,396 A (OKAJIMA et al) 05 December 1995 (05.12.1995) entire document	1-49, 51-55, and 57
Y		50 and 56
Y	US 6,916,464 B2 (HANSENNE et al) 12 July 2005 (12.07.2005) entire document	50 and 56
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/>		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 20 December 2007		Date of mailing of the international search report 03 MAR 2008
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201		Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US07/68286

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See extra sheet.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US07/68286

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I, claims 1-47, drawn to a display device comprising a plurality of parallel fluorescent stripes wherein at least three adjacent fluorescent stripes are made of three different fluorescent materials.

Group II, claims 48-57, drawn to a method of adjusting an emission spectrum of a phosphor material comprising generating a binder mixture.

The inventions listed as Groups I and II do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the special technical feature of the Group I invention: a plurality of parallel fluorescent stripes wherein at least three adjacent fluorescent stripes are made of three different fluorescent materials as claimed therein is not present in the invention of Group II. The special technical feature of the Group II invention: generating a binder mixture as claimed therein is not present in the invention of Group I.

Since none of the special technical features of the Group I or II inventions are found in more than one of the inventions, unity of invention is lacking.